

Coaxial

Low Pass Filter

DC to 825 MHz (40 dB Isolation up to 20 GHz)

NEW!
VLFX-825

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input* 10W max. at 25°C

*Passband rating, derate linearly to 3.5W at 100°C ambient.

Features


- very good isolation, 40 dB up to 20 GHz
- 21 sections
- temperature stable LTCC internal structure
- patent pending
- re-entry frequency > 20 GHz
- rugged stainless steel unibody

Applications

- harmonic rejection
- transmitters/receivers
- lab use
- test instrumentation


CASE STYLE: FF1118
PRICE: \$ 39.95 ea. QTY (1-9)


Outline Drawing

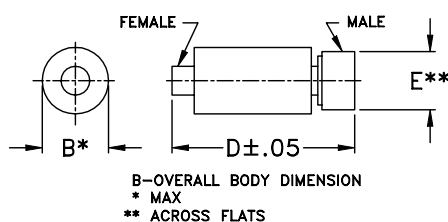


Outline Dimensions (inch)

B	D	E	wt.
.39	2.67	.312	grams
9.91	67.82	7.92	17.0

Functional Schematic



Typical Frequency Response


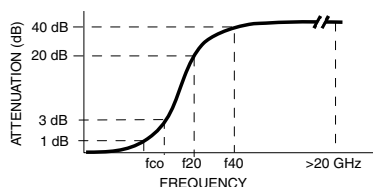


Low Pass Filter Electrical Specifications @ 25°C

MODEL NO.	PASSBAND (MHz) (Loss < 1.2dB) Max.	fco, MHz Nom (Loss 3 dB) Typ	STOPBAND (MHz) (Loss, dB)		VSWR (:1)		NO. OF SECTIONS
			f20 Min.	f40 Typ.	Stopband Typ.	Passband Typ.	
VLFX-825	DC-825	1275	1550	1850-20000	10	1.25	21

Typical Performance Data @ 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	0.21	1.04
250	0.34	1.11
500	0.56	1.09
850	0.99	1.15
950	1.19	1.15
1100	1.58	1.11
1300	3.89	1.26
1400	11.97	3.20
1475	22.09	5.16
1800	39.04	18.43
2000	62.70	27.62
3000	75.79	64.73
4000	81.73	66.53
5000	75.62	62.40
7500	72.55	42.41
10000	71.84	17.08
12500	61.43	6.17
15000	77.23	5.85
17500	68.24	21.82
20000	73.81	13.68

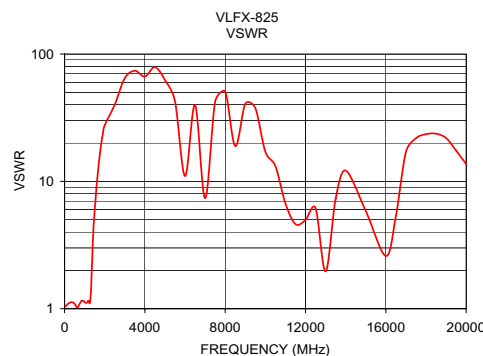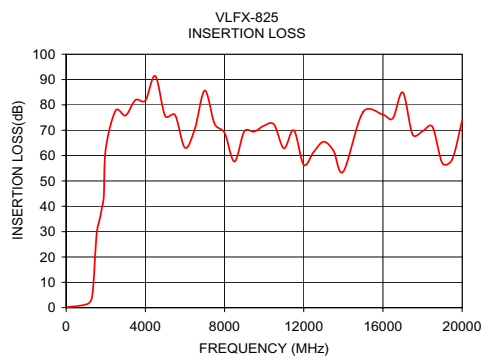

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

REV. OR
M96318
VLFX-825
EDU-0399
ED-11930A/12
URJ/RS/CP
050119