

ADJUSTABLE DIVIDED VOLTAGE GENERATOR

■ GENERAL DESCRIPTION

The NJM2366 is an adjustable divided voltage generator for medium and large size LCD panels which are required five bias voltage.


5 divided voltage are generated by internal bleeder resistor and are output through the buffer amplifier.

The minimum voltage ratio is selected from 1/13 to 1/19 of supply voltage.

■ FEATURES

- Operating Voltage (-10V to -36V)
- Low Operating Current (1.5mA max.)
- Output Current ($\pm 10\text{mA}$ min.)
- 5 Divided Voltage From Supply Voltage
- Internal an OP-AMP
- Bipolar Technology
- Package Outline SOP20, SSOP20


■ PIN CONFIGURATION

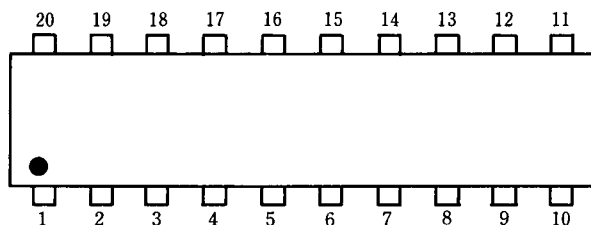


NJM2366G

NJM2366V

■ PACKAGE OUTLINE



NJM2366G




NJM2366V

PIN FUNCTION

1. RX3	11. GND
2. RX4	12. V_{in}
3. RX2	13. V_1
4. RX1	14. V_2
5. V_{in1}	15. V_3
6. V_{in+}	16. V_4
7. V_{out}	17. V_5
8. V_{in}	18. V_-
9. NC	19. V_{in3}
10. V_{in2}	20. V_{ref}

■ BLOCK DIAGRAM

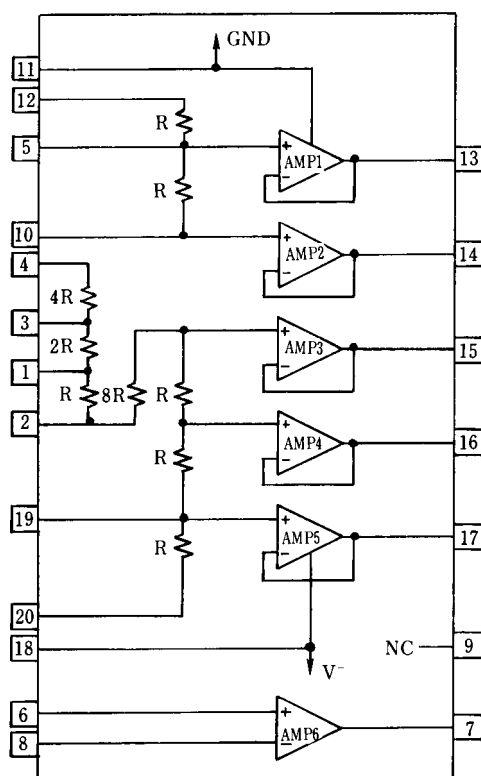

■ ABSOLUTE MAXIMUM RATINGS

(Ta = 25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	-40	V
Vin Voltage	V_{in}	-40	V
Output Current	I_{OUT}	±15	mA
Power Dissipation (G/V type)	P_D	300	mW
Operating Temperature	T_{opr}	-40 to + 85	°C
Storage Temperature Range (G/V type)	T_{stg}	-50 to +125	°C

■ ELECTRICAL CHARACTERISTICS

(V = -16V, Ta = 25°C)

Total Device

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Operating Current	I_{CC}	$V = V_{ref} = -30V$, 1/13Bias	-	-	1.5	mA
Resistance	R	$I_R = 20\mu A$	15	20	25	kΩ
Internal Resistance Divided Ratio	Ra1	R/R	0.98	1.00	1.02	
	Ra2	2R/R	1.96	2.00	2.04	
	Ra3	4R/R	3.92	4.00	4.08	
	Ra4	8R/R	7.84	8.00	8.16	

Buffers Block

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage Rating	RA1	$V = V_{ref}$ $ GND - V1 / V1 - V2 $ $-10V > V > -30V$	0.98	1.00	1.02	
	RA2	$ V3 - V4 / V4 - V5 $ $-10V > V > -30V$	0.98	1.00	1.02	
Output Voltage Difference	DV	(A) + (B) ; $V = V_{ref}$ (A) = $ GND - V1 - V1 - V2 $ (B) = $ V4 - V5 - V3 - V4 $	-100	0	100	mV
Load Regulation	$\Delta V1$	$V = V_{ref} = -30V$ $-10mA \leq I_{OUT} \leq 10mA$	-20	0	20	mV
	$\Delta V2$		-20	0	20	
	$\Delta V3$		-20	0	20	
	$\Delta V4$		-20	0	20	
	$\Delta V5$		-20	0	20	
	ΔV_{out}		-20	0	20	

■ ELECTRICAL CHARACTERISTICS

($V = -16V$, $T_a = 25^\circ C$)

PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Output Current 1	$I_{SOURCE1}$	$V = V_{ref} = -30V$ $1/13Bias$	+10	-	-	mA
	$I_{SOURCE2}$		+10	-	-	
	$I_{SOURCE3}$		+10	-	-	
	$I_{SOURCE4}$		+10	-	-	
	$I_{SOURCE5}$		+10	-	-	
	$I_{SOURCE6}$		+10	-	-	
Output Current 2	I_{SINK1}	$V = V_{ref} = -30V$ $1/13Bias$	-10	-	-	
	I_{SINK2}		-10	-	-	
	I_{SINK3}		-10	-	-	
	I_{SINK4}		-10	-	-	
	I_{SINK5}		-10	-	-	
	I_{SINK6}		-10	-	-	

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.