


MMBC1623L3**NPN EPITAXIAL SILICON TRANSISTOR**

T-29-19-

AMPLIFIER TRANSISTOR**ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)**

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CB0}	50	V
Collector-Emitter Voltage	V_{CE0}	40	V
Emitter-Base Voltage	V_{EB0}	5.0	V
Collector Current	I_C	100	mA
Collector Dissipation	P_C	350	mW
Storage Temperature	T_{stg}	150	$^\circ\text{C}$

SOT-23



1. Base 2. Emitter 3. Collector

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

Characteristic	Symbol	Test Condition	Min	Max	Unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = 40\text{V}, I_E = 0$		100	nA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 5\text{V}, I_C = 0$		100	nA
DC Current Gain	h_{FE}	$V_{CE} = 6\text{V}, I_C = 1.0\text{mA}$	60	120	
Collector-Emitter Saturation Voltage	$V_{CE}(\text{sat})$	$I_C = 100\text{mA}, I_B = 10\text{mA}$		0.3	V
Base-Emitter Saturation Voltage	$V_{BE}(\text{sat})$	$I_C = 100\text{mA}, I_B = 10\text{mA}$		1.0	V
Base-Emitter On Voltage	$V_{BE}(\text{on})$	$I_C = 1.0\text{mA}, V_{\gamma} = 6\text{V}$	0.6	0.7	V
Current Gain-Bandwidth Product	f_T	$V_{CE} = 6\text{V}, I_E = 10\text{mA}$ $f = 100\text{MHz}$	200		MHz


Marking

MMBC1623L3


NPN EPITAXIAL SILICON TRANSISTOR

T-29-19


STATIC CHARACTERISTIC

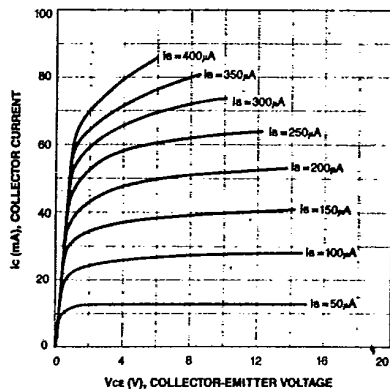



TRANSFER CHARACTERISTIC

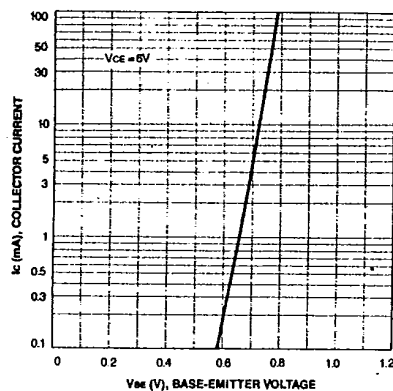

DC CURRENT GAIN

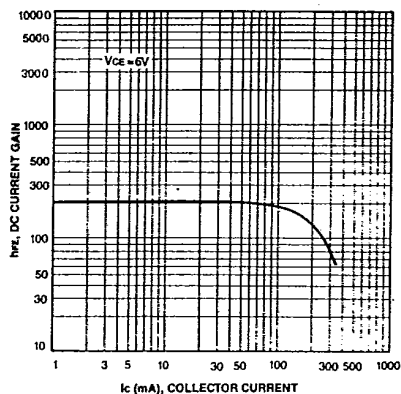

CURRENT GAIN BANDWIDTH PRODUCT

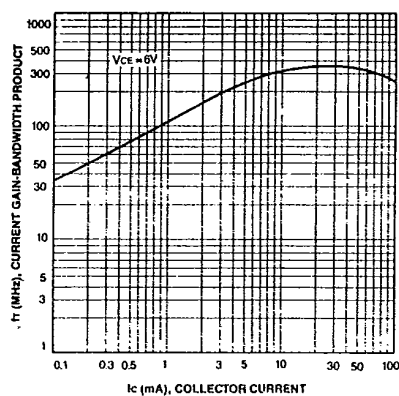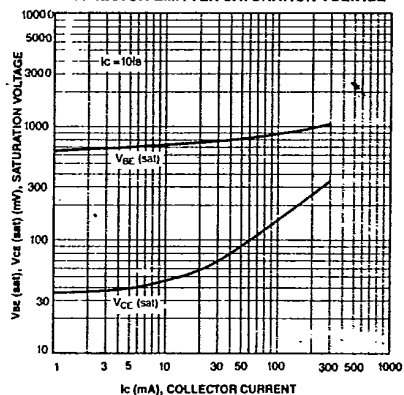BASE-EMITTER SATURATION VOLTAGE
COLLECTOR-EMITTER SATURATION VOLTAGE

OUTPUT CAPACITANCE

