


## Features

- Designed for VHF/UHF Amplifier Applications and High Output VHF Oscillators
- High Current Gain Bandwidth Product
- Ideal for Mixer and RF Amplifier Applications with collector currents in the 100 $\mu$ A - 30 mA Range

## Mechanical Data

- Case: SOT-23, Molded Plastic
- Case material - UL Flammability Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solderable per MIL-STD-202, Method 208
- Terminal Connections: See Diagram
- Marking (See Page 2): K3Z
- Ordering & Date Code Information: See Page 2
- Weight: 0.008 grams (approx.)

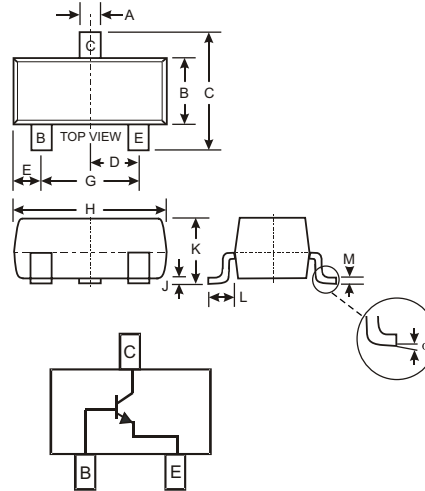

| SOT-23               |       |       |
|----------------------|-------|-------|
| Dim                  | Min   | Max   |
| A                    | 0.37  | 0.51  |
| B                    | 1.20  | 1.40  |
| C                    | 2.30  | 2.50  |
| D                    | 0.89  | 1.03  |
| E                    | 0.45  | 0.60  |
| G                    | 1.78  | 2.05  |
| H                    | 2.80  | 3.00  |
| J                    | 0.013 | 0.10  |
| K                    | 0.903 | 1.10  |
| L                    | 0.45  | 0.61  |
| M                    | 0.085 | 0.180 |
| $\alpha$             | 0°    | 8°    |
| All Dimensions in mm |       |       |

## Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic                                   | Symbol          | MMBTH24     | Unit               |
|--------------------------------------------------|-----------------|-------------|--------------------|
| Collector-Base Voltage                           | $V_{CBO}$       | 40          | V                  |
| Collector-Emitter Voltage                        | $V_{CEO}$       | 40          | V                  |
| Emitter-Base Voltage                             | $V_{EBO}$       | 4.0         | V                  |
| Collector Current - Continuous (Note 1)          | $I_C$           | 50          | mA                 |
| Power Dissipation (Note 1)                       | $P_d$           | 300         | mW                 |
| Thermal Resistance, Junction to Ambient (Note 1) | $R_{\theta JA}$ | 417         | $^\circ\text{C/W}$ |
| Operating and Storage Temperature Range          | $T_j, T_{STG}$  | -55 to +150 | $^\circ\text{C}$   |

## Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic                       | Symbol        | Min | Max  | Unit | Test Condition                                              |
|--------------------------------------|---------------|-----|------|------|-------------------------------------------------------------|
| <b>OFF CHARACTERISTICS (Note 2)</b>  |               |     |      |      |                                                             |
| Collector-Emitter Breakdown Voltage  | $V_{(BR)CEO}$ | 40  | —    | V    | $I_C = 1\text{mA}, I_B = 0$                                 |
| Collector-Base Breakdown Voltage     | $V_{(BR)CBO}$ | 40  | —    | V    | $I_C = 100\mu\text{A}, I_E = 0$                             |
| Emitter-Base Breakdown Voltage       | $V_{(BR)EBO}$ | 4.0 | —    | V    | $I_E = 10\mu\text{A}, I_C = 0$                              |
| Collector Cutoff Current             | $I_{CBO}$     | —   | 100  | nA   | $V_{CB} = 30\text{V}, I_E = 0$                              |
| Emitter Cutoff Current               | $I_{EBO}$     | —   | 100  | nA   | $V_{EB} = 2\text{V}, I_C = 0$                               |
| <b>ON CHARACTERISTICS (Note 2)</b>   |               |     |      |      |                                                             |
| DC Current Gain                      | $h_{FE}$      | 30  | —    | —    | $I_C = 8\text{mA}, V_{CE} = 10.0\text{V}$                   |
| Collector-Emitter Saturation Voltage | $V_{CE(SAT)}$ | —   | 0.5  | V    | $I_C = 4\text{mA}, I_B = 400\mu\text{A}$                    |
| Base-Emitter On Voltage              | $V_{BE(SAT)}$ | —   | 0.95 | V    | $I_C = 4\text{mA}, V_{CE} = 10.0\text{V}$                   |
| <b>SMALL SIGNAL CHARACTERISTICS</b>  |               |     |      |      |                                                             |
| Current-Gain-Bandwidth Product       | $f_T$         | 400 | —    | MHz  | $V_{CE} = 10\text{V}, f = 100\text{MHz}, I_C = 8\text{mA}$  |
| Collector-Base Capacitance           | $C_{CB}$      | —   | 0.7  | pF   | $V_{CB} = 10\text{V}, f = 1.0\text{MHz}, I_E = 0$           |
| Collector-Base Feedback Capacitance  | $C_{RB}$      | —   | 0.65 | pF   | $V_{CB} = 10\text{V}, f = 1.0\text{MHz}, I_E = 0$           |
| Collector-Base Time Constant         | $R_b'C_c$     | —   | 9    | ps   | $I_C = 4\text{mA}, V_{CB} = 10\text{V}, f = 31.8\text{MHz}$ |


Note: 1. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.  
 2. Short duration test pulse used to minimize self-heating effect.

## Ordering Information (Note 3)

| Device    | Packaging | Shipping         |
|-----------|-----------|------------------|
| MMBTH24-7 | SOT-23    | 3000/Tape & Reel |

Notes: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

## Marking Information



K3Z = Product Type Marking Code  
 YM = Date Code Marking  
 Y = Year ex: N = 2002  
 M = Month ex: 9 = September

### Date Code Key

| Year | 1998 | 1999 | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 |
|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Code | J    | K    | L    | M    | N    | P    | R    | S    | T    | U    | V    | W    |

| Month | Jan | Feb | March | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code  | 1   | 2   | 3     | 4   | 5   | 6   | 7   | 8   | 9   | O   | N   | D   |