

VHF variable capacitance diode

FEATURES


- High linearity
- Excellent matching to 2% DMA
- Ultra small plastic SMD package
- C25: 2.75 pF; ratio: 11
- Low series resistance.

APPLICATIONS

- Electronic tuning in VHF television tuners.
- Voltage controlled oscillators (VCO).

DESCRIPTION

The BB187 is a planar technology variable capacitance diode, in a SOD523 (SC-79) package. The excellent matching performance is achieved by gliding matching and a direct matching assembly procedure.



BB 187



SOD523 SC-79

MARKING CODE:X



LIMITING VALUES In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_R	continuous reverse voltage		–	32	V
V_{RM}	peak reverse voltage	in series with a 10 k Ω resistor	–	35	V
I_F	continuous forward current		–	20	mA
T_{stg}	storage temperature		–55	+150	°C
T_j	operating junction temperature		–55	+125	°C

ELECTRICAL CHARACTERISTICS $T_j=25^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	TYP.	UNIT
I_R	reverse current	$V_R = 30\text{ V}$; see Fig.2	–	–	10	nA
		$V_R = 30\text{ V}$; $T_j=85^{\circ}\text{C}$; see Fig.2	–	–	200	nA
r_s	diode series resistance	$f = 470\text{ MHz}$; $V_R = 5\text{ V}$	–	–	0.75	Ω
C_d	diode capacitance	$V_R = 2\text{ V}$; $f = 1\text{ MHz}$; see Figs 1 and 3	29.3	–	34.2	pF
		$V_R = 25\text{ V}$; $f = 1\text{ MHz}$; see Figs 1 and 3	2.57	–	2.92	pF
$\frac{C_{d(2V)}}{C_{d(25V)}}$	capacitance ratio	$f = 1\text{ MHz}$	11	–	–	
$\frac{\Delta C_d}{C_d}$	capacitance matching	$V_R = 2\text{ to }25\text{ V}$; in a sequence of 15 diodes(gliding)	–	–	2	%

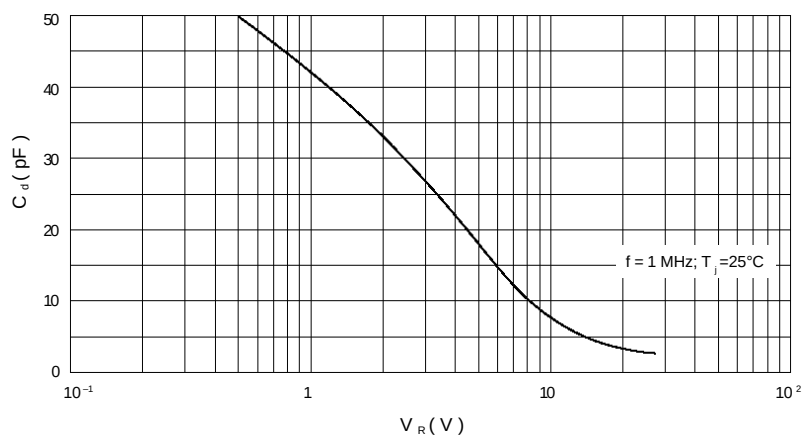
BB 187


Fig.1 Diode capacitance as a function of reverse voltage; typical values.

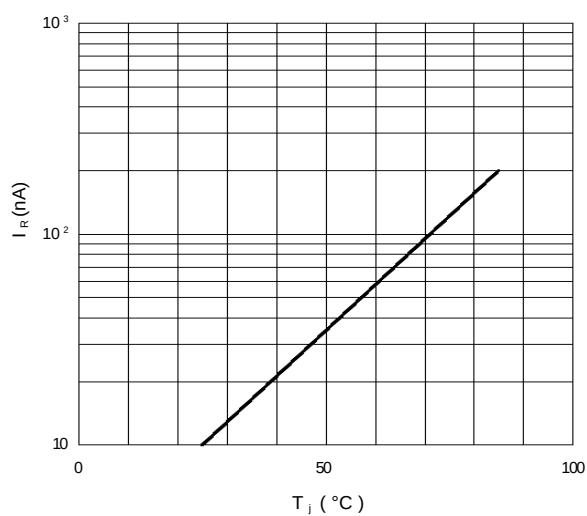


Fig.2 Reverse current as a function of junction temperature; maximum values.

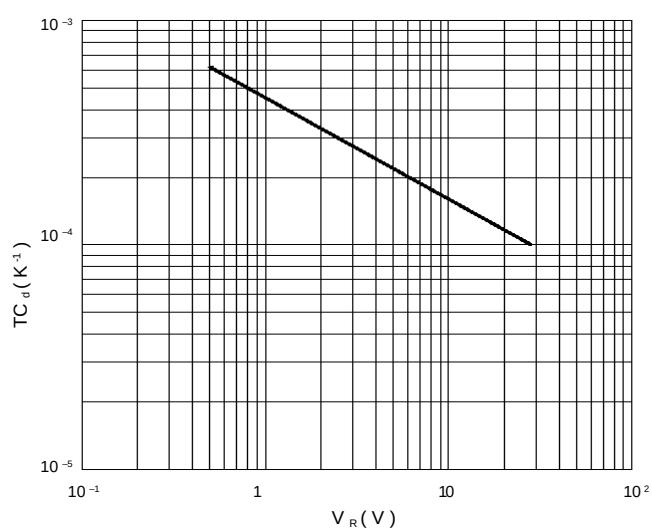


Fig.3 Temperature coefficient of diode capacitance as a function of reverse voltage; typical values.