



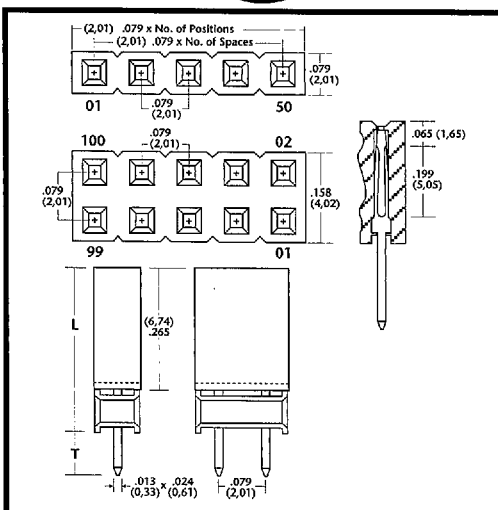

Mates with: TSHS, TSHR, TSHC, BSTS, BSTC, TSHCR, TSHSM, BSTCM

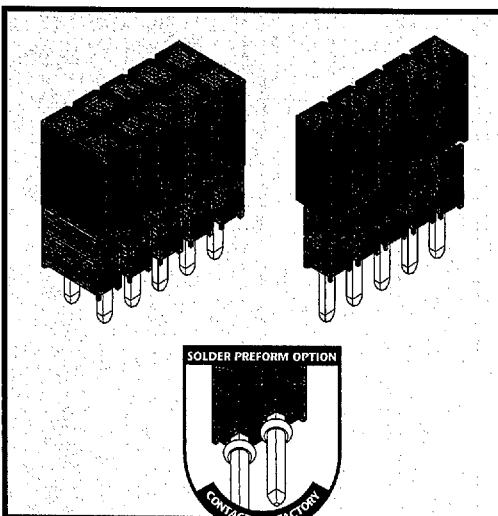

BSSH Socket plugged into Terminal Header

Product cut to specific sizes is noncancellable/nonreturnable.
Parts are subject to change without notice.

EXAMPLE: To elevate the board .442" with a .131" tail with a high temperature material, a 40 position, single row, tin plated part, order a **HBSSH-240-S-12-T**.

	STANDARD	HIGH TEMPERATURE
Insulator	Black, glass filled, polyester	High temperature thermoplastic
Terminal	Phosphor Bronze	Phosphor Bronze
Insulation Resistance	5,000M Ω minimum	5,000M Ω minimum
Flammability	UL 94V-O	UL 94V-O
Temperature Range	-65°C to +125°C	-65°C to +250°C
Current Rating	1 ampere	1 ampere
Plating	All Plating Options over 50 μ in Ni	All Plating Options over 50 μ in Ni



Delivery On Time Every Time...Or The Order's Free!

D 24F ■ 9019296 0000049 677

phone: 812-944-7244 • Facsimile: 812-944-7268 • Email: mle@iglou.com

49

9
www.DataSheet4U.com