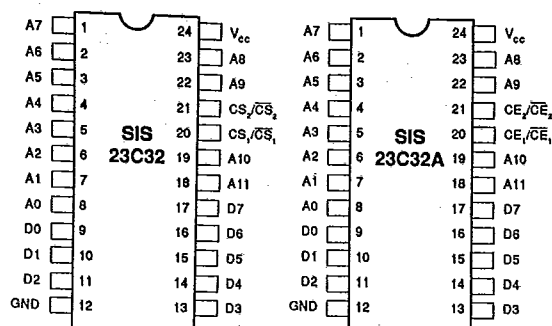


CMOS MASK ROM**SIS 23C32/ 23C32A
4Kx8 CMOS MASK ROM****FEATURE**


- Access time 150/200ns
- Single + 5V power supply
- Pin Compatible with 2532 EPROM
- TTL Compatible Inputs and Outputs
- Three-State Outputs
- Two Programmable Chip Selects for Output Control
- CMOS Silicon Gate Technology
- Low Power Dissipation
- Low Standby Current
- SIS 23C32A - Automatic Power Down (CE)
- SIS 23C32 - non power down version
 - programmable chip select (CS)

PIN ASSIGNMENT**ORDERING INFORMATION**

Part Number	Access Time	Package
SIS 23C32/A-20	200ns	Plastic DIP
SIS 23C32/A-15	150ns	Plastic DIP

**SIS 23C33/ 23C33A
4Kx8 CMOS MASK ROM****FEATURE**

- Access Time 150/200ns
- Single + 5V power supply
- Pin Compatible with 2732 EPROM
- TTL Compatible Inputs and Outputs
- Three-state outputs
- Two programmable chip selects for output control
- CMOS Silicon Gate Technology
- Low Power Dissipation
- low Standby Current
- SIS 23C33A - Automatic Power Down (CE)
- SIS 23C33 - non power down version
 - programmable chip select (CS)

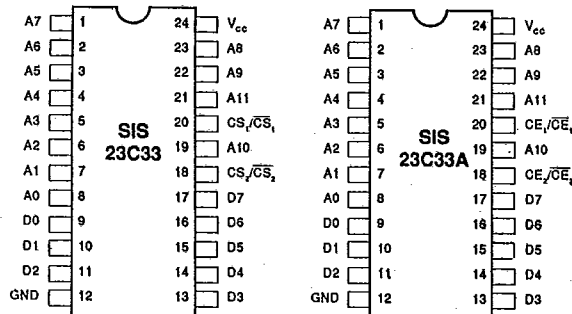PIN ASSIGNMENT**ORDERING INFORMATION**

Part Number	Access Time	Package
Sis 23C33/A-20	200ns	Plastic DIP
Sis 23C33/A-15	150ns	Plastic DIP