

Standard rectifier diodes

Type		V_{RRM}	I_{FAV}	I_{FRMS}	I_{FSM} 25°C, 10ms	$f t^2 dt$ 25°C, 10ms	T_{Jmax}	$R_{th JC}$	Fig.
⬆ Anode = case	⬆ Cathode = case	V	A	A	A	A²s	°C	K/W	
SSiF 3825	SSiF 3925	400	65	102	1000	5000	180	0,65	1
SSiF 3840	SSiF 3940	700							
SSiF 3860	SSiF 3960	1100							
SSiF 3883	SSiF 3983	1500							
SSiG 3825	SSiG 3925	400	80	125	1185	7000	180	0,55	1
SSiG 3840	SSiG 3940	700							
SSiG 3860	SSiG 3960	1100							
SSiG 3883	SSiG 3983	1500							

Type	V_{RRM}	I_{FAV}	I_{FRMS}	I_{FSM} 25°C, 10 ms	$f t^2 dt$ 25°C, 10 ms	T_{Jmax}	$R_{th JC}$	Fig.
	V	A	A	A	A²s	°C	K/W	
SSiK 24120	2200	140	220	1860	17350	160	0,40	2
SSiK 24135	2500							
SSiK 3825	400	160	255	4000	80000	180	0,25	2
SSiK 3840	700							
SSiK 3860	1100							
SSiK 3883	1500							
SSiN 30 60	1100	450	707	9400	440000	180	0,11	3
SSiN 30 83	1500							
SSiN 30100	1800							
SSiN 30120	2200							
SSiP 32175	3200	450	710	10300	530000	160	0,09	4
SSiP 32200	3600							
SSiP 32220	4000							

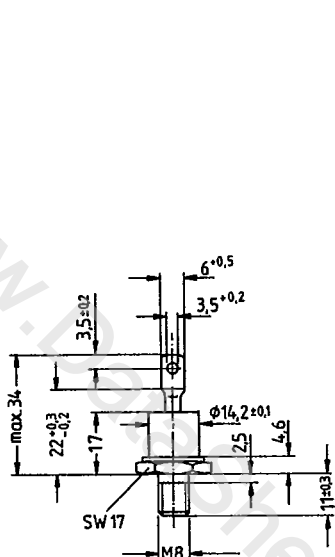


Fig. 1

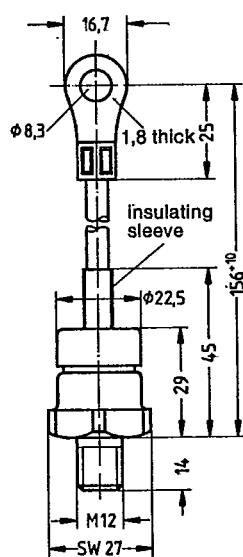


Fig. 2

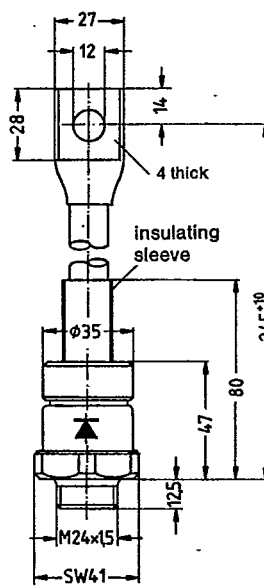


Fig. 3

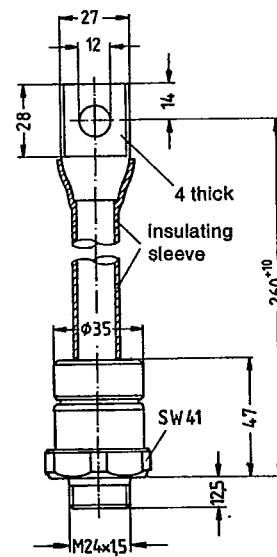


Fig. 4 Dimensions in mm