


DETAIL: A



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vss	Vcc	Vee	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

- NOTES:
- 1: DISPLAY TYPE: STN/GRAY MODE
  - 2: VIEWING DIRECTION: 12:00
  - 3: POLARIZER MODE: TRANSFLECTIVE/POSITIVE
  - 4: DRIVE METHOD: 1/16 DUTY 1/5 BIAS
  - 5: LCD OPERATING VOLTAGE: 8.5V
  - 6: OPERATING TEMP: -20°C~+70°C
  - 7: STORAGE TEMP: -30°C~+80°C
  - 8: BACKLIGHT: LED
  - 9: CONTROLLER: S6A0069X01-COCX(KS0066UP-00CC)
  - 10: ALL UNMARKED TOLERANCES: ±0.3mm
  - 11: BEZEL IS TO BE PAINTED BLACK

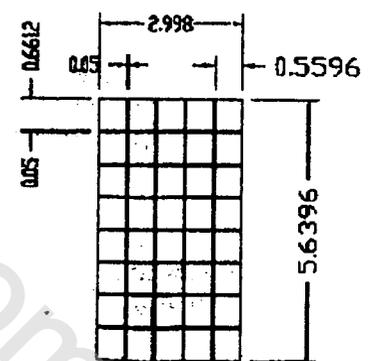

TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: 罗伟华  
 CHECKED BY: 潘若华  
 APPROVED BY: 王彩华  
 CONFIRMED BY:

TITLE: TM162IDCWU7  
 DWG NO: G-1  
 DWG NAME: tm162idcwu7-1

SCALE: 1:1  
 UNITS: mm  
 SHEET NO: 01