


Low EMI Spread Spectrum Multiplier Clock

FEATURES

- Spread Spectrum clock with frequency range of 33 ~ 90MHz.
- Output frequency 1X the input frequency.
- Less than 250 ps skew between outputs.
- Less than 100 ps cycle - cycle jitter.
- $\pm 0.50\%$ Center Spread Modulation.
- TTL/CMOS compatible outputs.
- 3.3V operation.
- Available in 8-Pin 150mil SOIC.

PIN CONFIGURATION

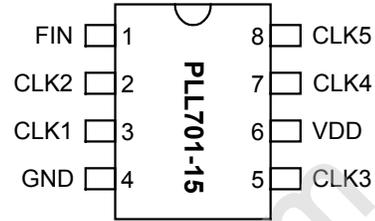


FIN = 33 ~ 90 Mhz

DESCRIPTIONS

The PLL701-15 is a Spread Spectrum Clock Generator designed for the purpose of reducing EMI in high-speed digital systems. The device is designed to operate from 33 ~ 90MHz and provides five low-skew outputs.

BLOCK DIAGRAM

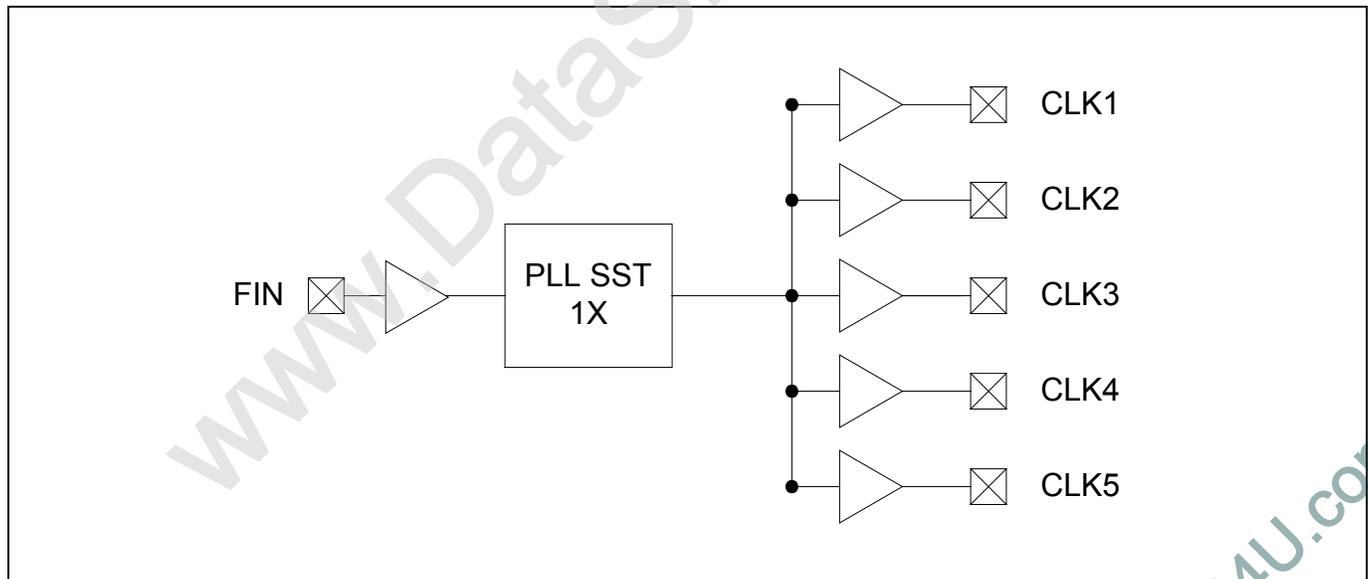

Low EMI Spread Spectrum Multiplier Clock**PIN DESCRIPTIONS**

Name	Number	Type	Description
FIN	1	I	Input Clock Frequency. (33 ~ 90MHz)
CLK2	2	O	Buffered Clock Output. 1X the input frequency (FIN).
CLK1	3	O	Buffered Clock Output. 1X the input frequency (FIN).
GND	4	I	Ground.
CLK3	5	O	Buffered Clock Output. 1X the input frequency (FIN).
VDD	6	P	3.3V Power Supply.
CLK4	7	O	Buffered Clock Output. 1X the input frequency (FIN).
CLK5	8	O	Buffered Clock Output. 1X the input frequency (FIN).

Low EMI Spread Spectrum Multiplier Clock

ELECTRICAL SPECIFICATIONS

1. Absolute Maximum Ratings

PARAMETERS	SYMBOL	MIN.	MAX.	UNITS
Supply Voltage Range	V_{CC}	-0.5	7	V
Input Voltage Range	V_I	-0.5	$V_{CC}+0.5$	V
Output Voltage Range	V_O	-0.5	$V_{CC}+0.5$	V
Soldering Temperature			260	°C
Storage Temperature	T_S	-65	150	°C
Ambient Operating Temperature*	T_A	-40	85	°C
ESD Voltage			2	kV

Exposure of the device under conditions beyond the limits specified by Maximum Ratings for extended periods may cause permanent damage to the device and affect product reliability. These conditions represent a stress rating only, and functional operations of the device at these or any other conditions above the operational limits noted in this specification is not implied

* **Note:** Operating Temperature is guaranteed by design for all parts (COMMERCIAL and INDUSTRIAL), but tested for INDUSTRIAL grade only.

2. Electrical Characteristics

$V_{DD} = 3.0\sim 3.6V$, unless otherwise stated

PARAMETERS	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Input Low Voltage	V_{IL}				0.8	V
Input High Voltage	V_{IH}		2.0			V
Input Low Current	I_{IL}	$V_{IN} = 0V$		19	50.0	μA
Input High Current	I_{IH}	$V_{IN} = V_{DD}$		0.10	100.0	μA
Output Low Voltage	V_{OL}	$I_{OL} = 50\text{ mA}$		0.25	0.4	V
Output High Voltage	V_{OH}	$I_{OH} = 50\text{ mA}$	2.4	2.9		V
Supply Current	I_{DD}	Unloaded outputs at 75MHz, SEL inputs at V_{DD} or GND		30.0	40.0	mA

Low EMI Spread Spectrum Multiplier Clock
3. TIMING CHARACTERISTICS

PARAMETERS	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Input Frequency	F_{IN}		33		90	MHz
Rise Time	T_r	Measured at 0.8V ~ 2.0V @ 3.3V	0.8	0.95	1.1	ns
Fall Time	T_f	Measured at 2.0V ~ 0.8V @ 3.3V	0.78	0.85	0.9	ns
Output Duty Cycle	D_T		45	50	55	%
Input to Output Delay			2		4	ns
Cycle to Cycle Jitter	$T_{cyc-cyc}$	Over output frequency range @ 3.3V			100	ps

Low EMI Spread Spectrum Multiplier Clock

PACKAGE INFORMATION

8 PIN Narrow SOIC (mm)

Symbol	SOIC	
	Min.	Max.
A	1.47	1.73
A1	0.10	0.25
B	0.33	0.51
C	0.19	0.25
D	4.80	4.95
E	3.80	4.00
H	5.80	6.20
L	0.38	1.27
e	1.27 BSC	

ORDERING INFORMATION

For part ordering, please contact our Sales Department:
 47745 Fremont Blvd., Fremont, CA 94538, USA
 Tel: (510) 492-0990 Fax: (510) 492-0991

PART NUMBER
 The order number for this device is a combination of the following:
 Device number, Package type and Operating temperature range

PLL701-15 S C

PART NUMBER _____

- TEMPERATURE
 C=COMMERCIAL
 M=MILITARY
 I=INDUSTRIAL
- PACKAGE TYPE
 S=SOIC

PhaseLink Corporation, reserves the right to make changes in its products or specifications, or both at any time without notice. The information furnished by Phaselink is believed to be accurate and reliable. However, PhaseLink makes no guarantee or warranty concerning the accuracy of said information and shall not be responsible for any loss or damage of whatever nature resulting from the use of, or reliance upon this product.

LIFE SUPPORT POLICY: PhaseLink's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of PhaseLink Corporation.