

Advanced Power MOSFET

SSF8N90A

FEATURES


- Avalanche Rugged Technology
- Rugged Gate Oxide Technology
- Lower Input Capacitance
- Improved Gate Charge
- Extended Safe Operating Area
- Lower Leakage Current : 25 μ A (Max.) @ $V_{DS} = 900V$
- Low $R_{DS(ON)}$: 1.247 Ω (Typ.)

$$BV_{DSS} = 900 V$$

$$R_{DS(on)} = 1.6 \Omega$$

$$I_D = 5.5 A$$

TO-3PF



1.Gate 2. Drain 3. Source

Absolute Maximum Ratings

Symbol	Characteristic	Value	Units
V_{DSS}	Drain-to-Source Voltage	900	V
I_D	Continuous Drain Current ($T_c=25^\circ C$)	5.5	A
	Continuous Drain Current ($T_c=100^\circ C$)	3.5	
I_{DM}	Drain Current-Pulsed ①	32	A
V_{GS}	Gate-to-Source Voltage	± 30	V
E_{AS}	Single Pulsed Avalanche Energy ②	801	mJ
I_{AR}	Avalanche Current ①	5.5	A
E_{AR}	Repetitive Avalanche Energy ①	9.5	mJ
dv/dt	Peak Diode Recovery dv/dt ③	1.5	V/ns
P_D	Total Power Dissipation ($T_c=25^\circ C$)	95	W
	Linear Derating Factor	0.76	W/ $^\circ C$
T_J, T_{STG}	Operating Junction and Storage Temperature Range	- 55 to +150	$^\circ C$
T_L	Maximum Lead Temp. for Soldering Purposes, 1/8 " from case for 5-seconds	300	

Thermal Resistance

Symbol	Characteristic	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	—	1.32	$^\circ C/W$
$R_{\theta JA}$	Junction-to-Ambient	—	40	

SAMSUNG

ELECTRONICS

SSF8N90A

N-CHANNEL POWER MOSFET

Electrical Characteristics ($T_c=25^\circ\text{C}$ unless otherwise specified)

Symbol	Characteristic	Min.	Typ.	Max.	Units	Test Condition
BV_{DSS}	Drain-Source Breakdown Voltage	900	—	—	V	$V_{GS}=0V, I_D=250\mu A$
$\Delta BV/\Delta T_J$	Breakdown Voltage Temp. Coeff.	—	1.06	—	V/ $^\circ\text{C}$	$I_D=250\mu A$ See Fig 7
$V_{GS(th)}$	Gate Threshold Voltage	2.0	—	3.5	V	$V_{DS}=5V, I_D=250\mu A$
I_{GSS}	Gate-Source Leakage, Forward	—	—	100	nA	$V_{GS}=30V$
	Gate-Source Leakage, Reverse	—	—	-100	nA	$V_{GS}=-30V$
I_{DSS}	Drain-to-Source Leakage Current	—	—	25	μA	$V_{DS}=900V$
		—	—	250	μA	$V_{DS}=720V, T_c=125^\circ\text{C}$
$R_{DS(on)}$	Static Drain-Source On-State Resistance	—	—	1.6	Ω	$V_{GS}=10V, I_D=2.75A$ ④*
g_{fs}	Forward Transconductance	—	5.0	—	S	$V_{DS}=50V, I_D=2.75A$ ④
C_{iss}	Input Capacitance	—	2070	2690	pF	$V_{GS}=0V, V_{DS}=25V, f=1\text{MHz}$ See Fig 5
C_{oss}	Output Capacitance	—	185	215		
C_{rss}	Reverse Transfer Capacitance	—	78	90		
$t_{d(on)}$	Turn-On Delay Time	—	25	60	ns	$V_{DD}=450V, I_D=8A,$ $R_G=10\Omega$ See Fig 13 ④ ⑤
t_r	Rise Time	—	38	85		
$t_{d(off)}$	Turn-Off Delay Time	—	122	255		
t_f	Fall Time	—	41	90		
Q_g	Total Gate Charge	—	94	123	nC	$V_{DS}=720V, V_{GS}=10V,$ $I_D=8A$ See Fig 6 & Fig 12 ④ ⑤
Q_{gs}	Gate-Source Charge	—	14.9	—		
Q_{gd}	Gate-Drain ("Miller") Charge	—	43.5	—		

Source-Drain Diode Ratings and Characteristics

Symbol	Characteristic	Min.	Typ.	Max.	Units	Test Condition
I_S	Continuous Source Current	—	—	5.5	A	Integral reverse pn-diode in the MOSFET
I_{SM}	Pulsed-Source Current ①	—	—	32		
V_{SD}	Diode Forward Voltage ④	—	—	1.4	V	$T_J=25^\circ\text{C}, I_S=5.5A, V_{GS}=0V$
t_{rr}	Reverse Recovery Time	—	620	—	ns	$T_J=25^\circ\text{C}, I_F=8A$
Q_{rr}	Reverse Recovery Charge	—	9.3	—	μC	$di_F/dt=100A/\mu s$ ④

Notes :

- Repetitive Rating : Pulse Width Limited by Maximum Junction Temperature
- $L=50\text{mH}, I_{AS}=5.5A, V_{DD}=50V, R_G=27\Omega$, Starting $T_J=25^\circ\text{C}$
- $I_{SD} \leq 8A, di/dt \leq 170A/\mu s, V_{DD} \leq BV_{DSS}$, Starting $T_J=25^\circ\text{C}$
- Pulse Test : Pulse Width = 250 μs , Duty Cycle $\leq 2\%$
- Essentially Independent of Operating Temperature

Fig 1. Output Characteristics

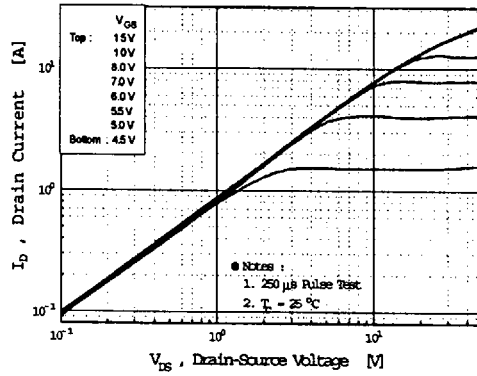


Fig 2. Transfer Characteristics

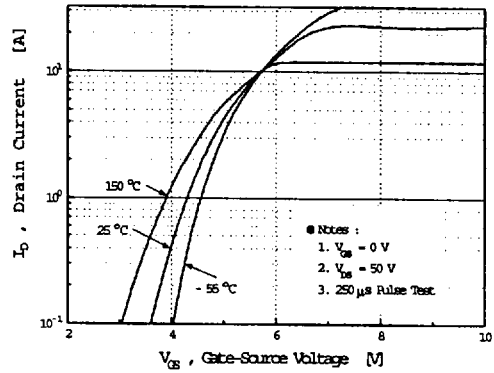


Fig 3. On-Resistance vs. Drain Current

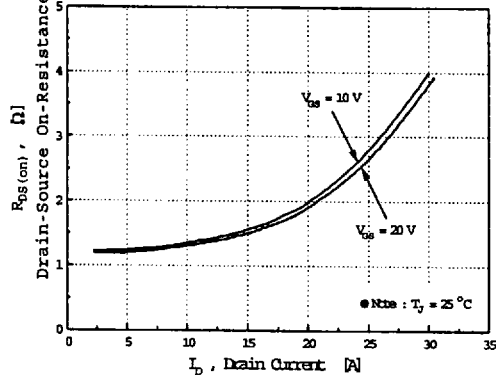


Fig 4. Source-Drain Diode Forward Voltage

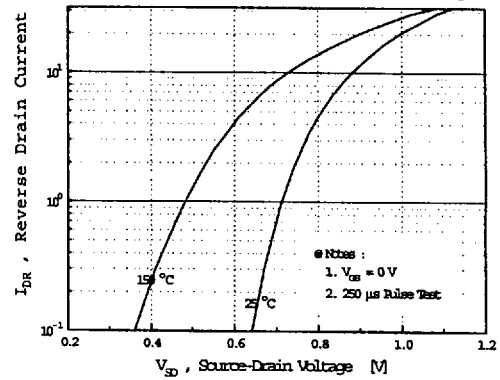


Fig 5. Capacitance vs. Drain-Source Voltage

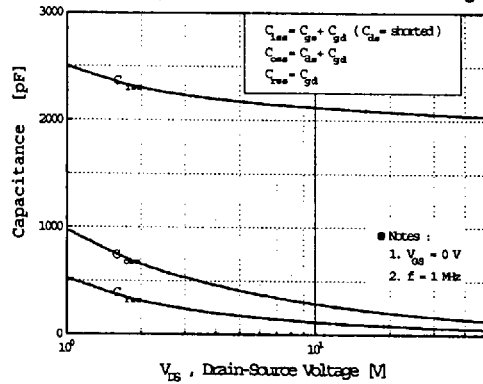
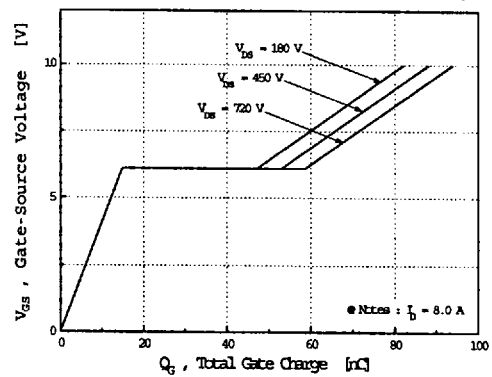


Fig 6. Gate Charge vs. Gate-Source Voltage



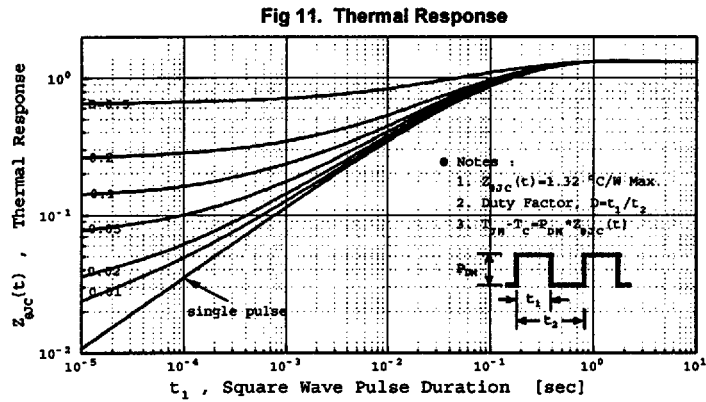
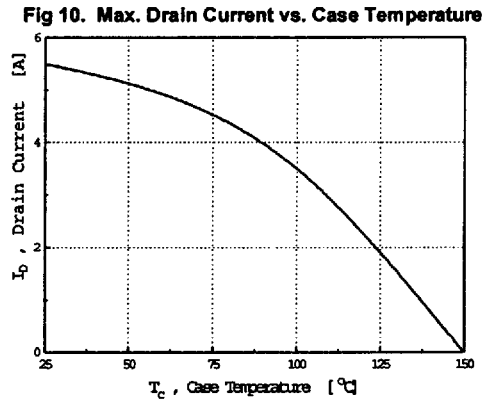
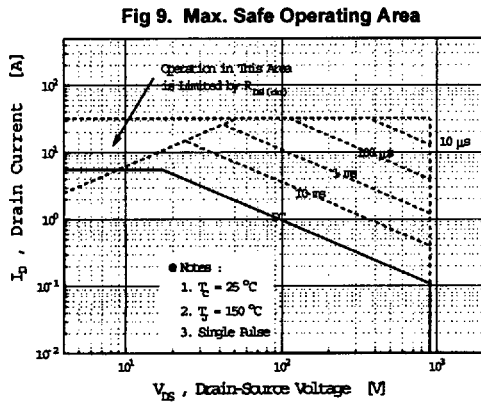
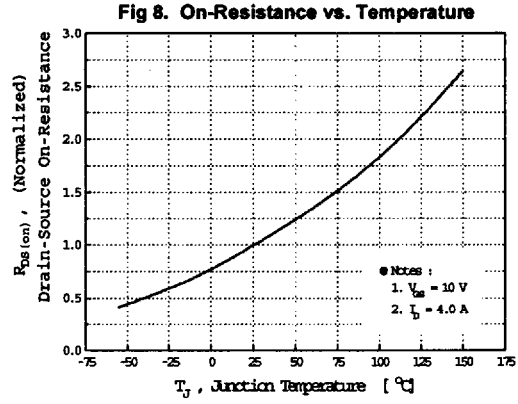
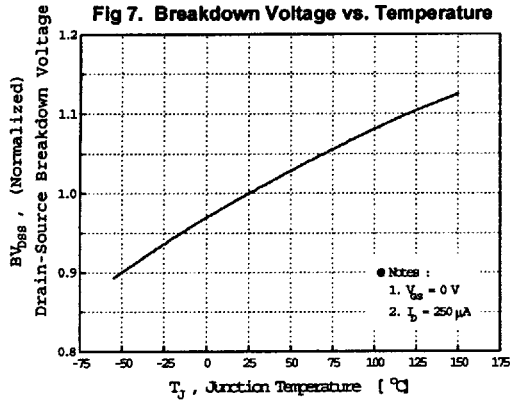


Fig 12. Gate Charge Test Circuit & Waveform

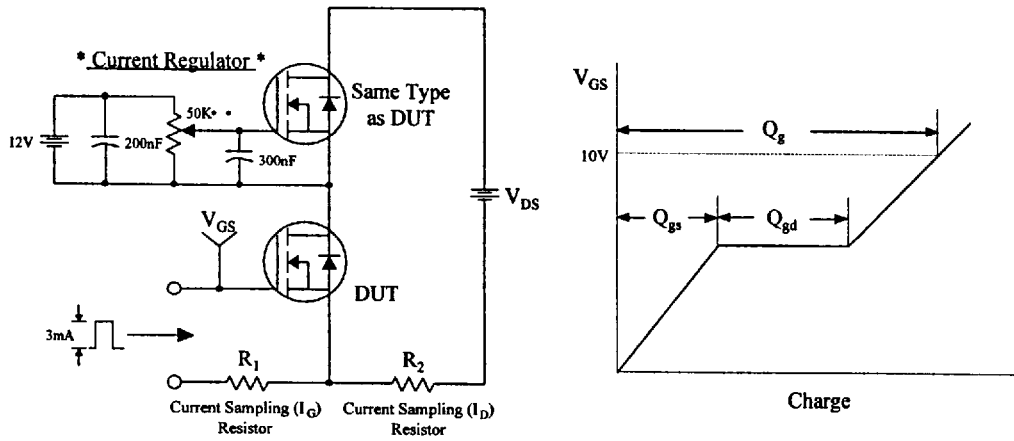


Fig 13. Resistive Switching Test Circuit & Waveforms

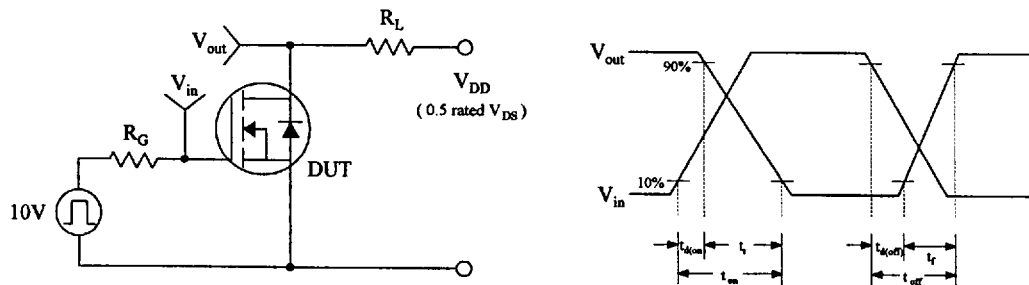


Fig 14. Unclamped Inductive Switching Test Circuit & Waveforms



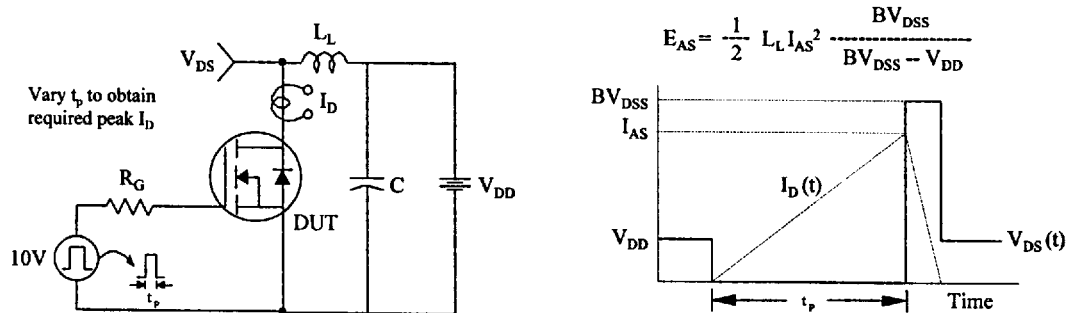



Fig 15. Peak Diode Recovery dv/dt Test Circuit & Waveforms

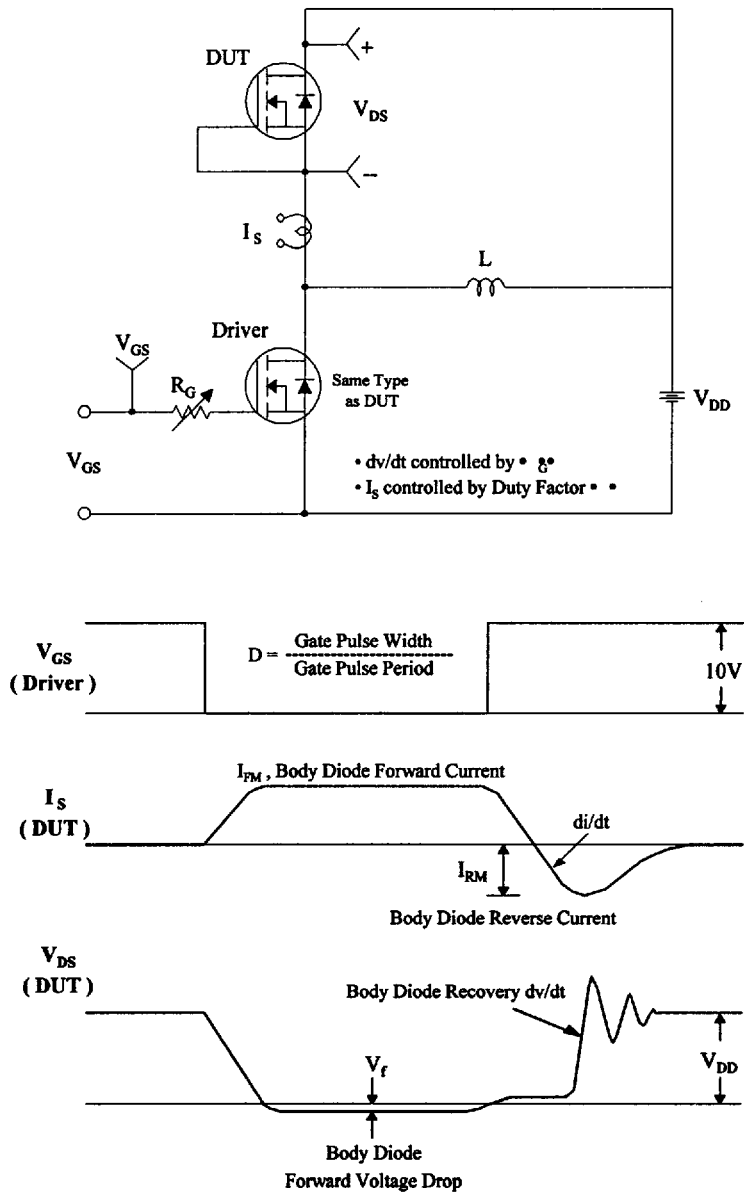


T0-3P (2)

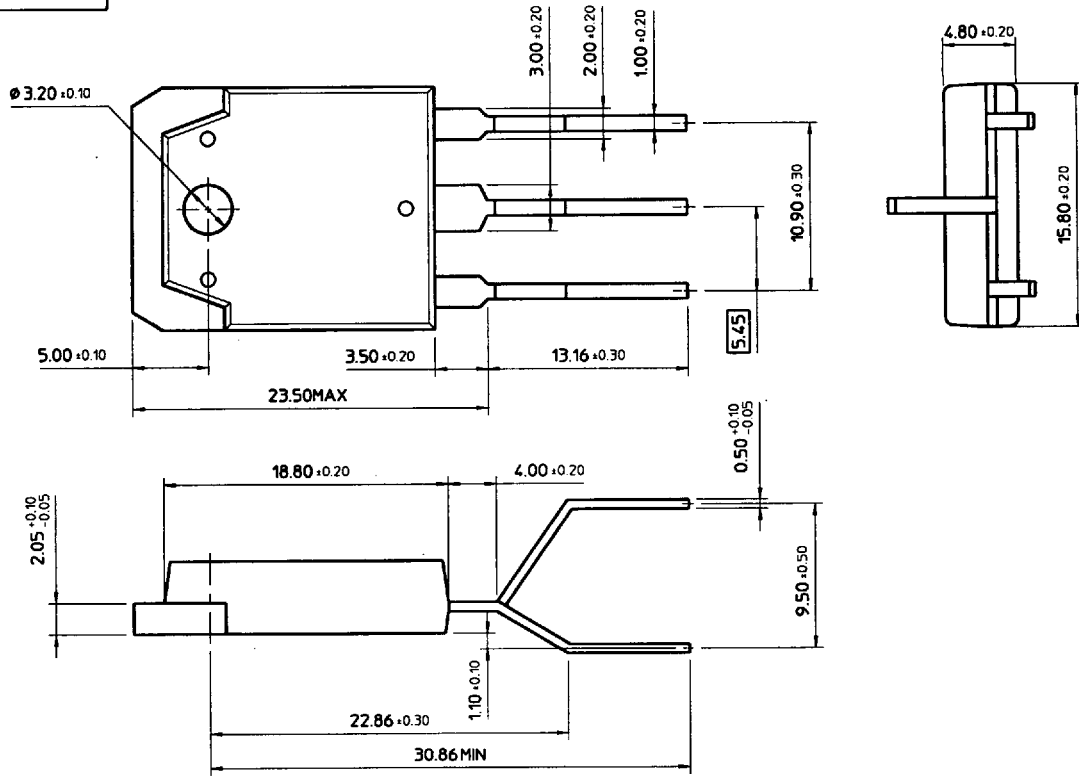


T0-3PF (1)

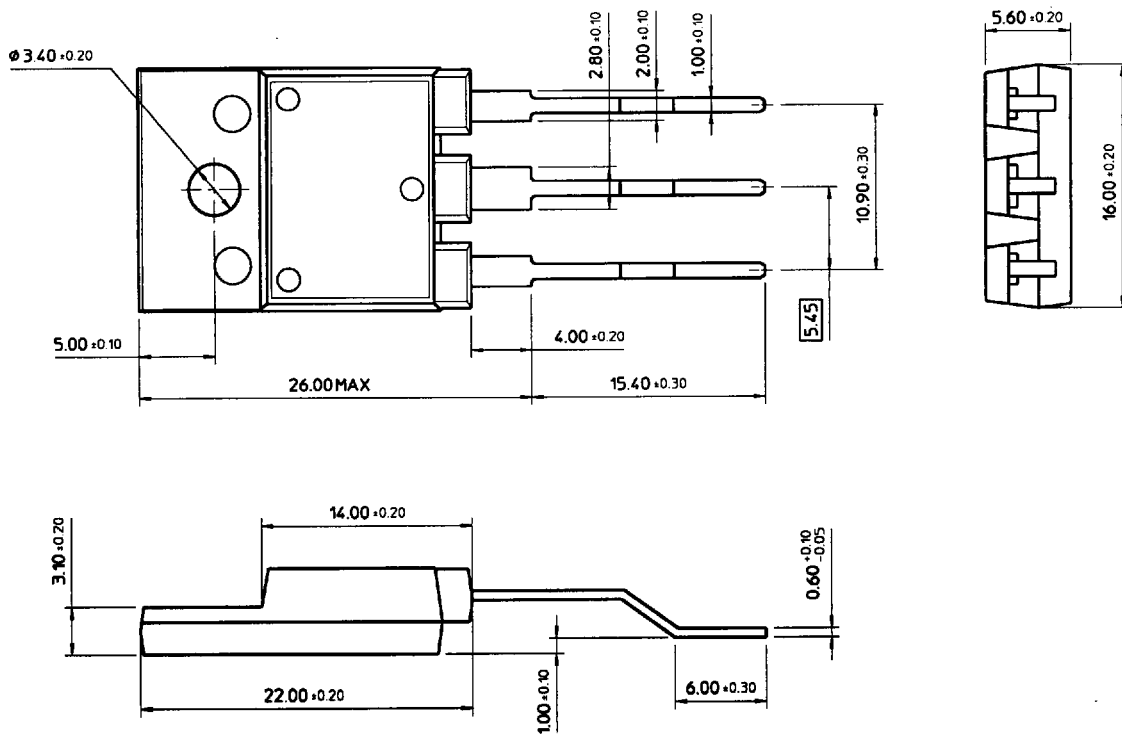


T0-3PF (2)

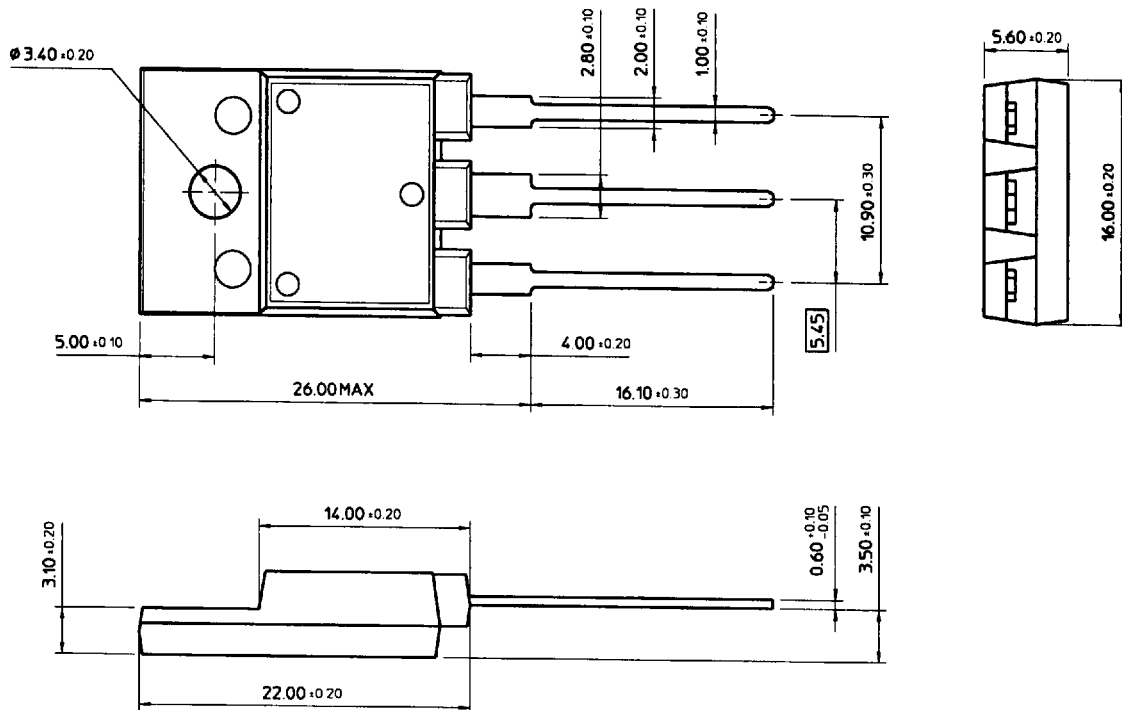


T0-3PF (3)

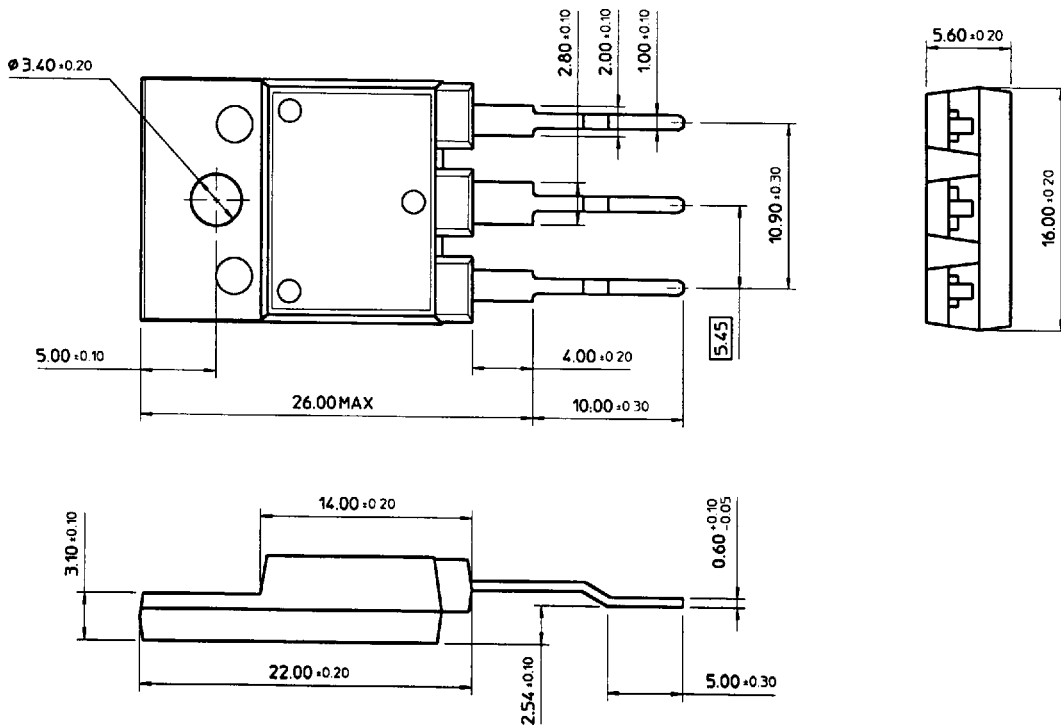

TO-3PF (4)

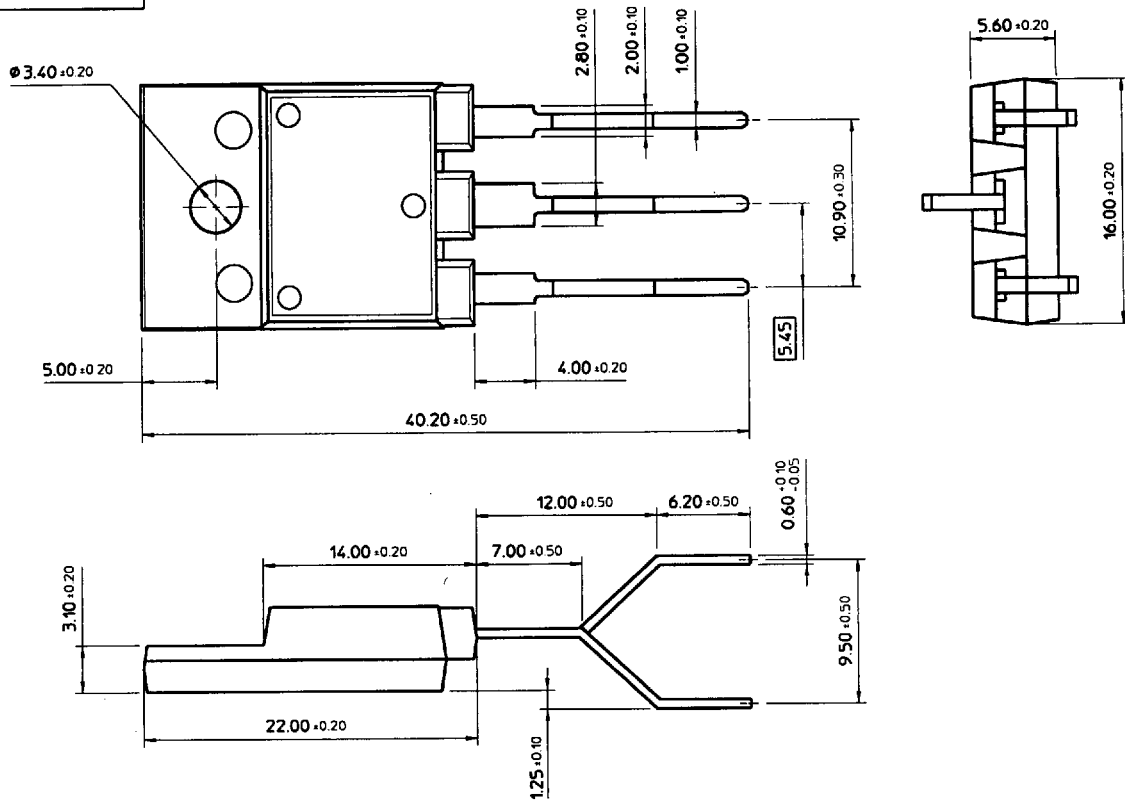

TO-3P-5L

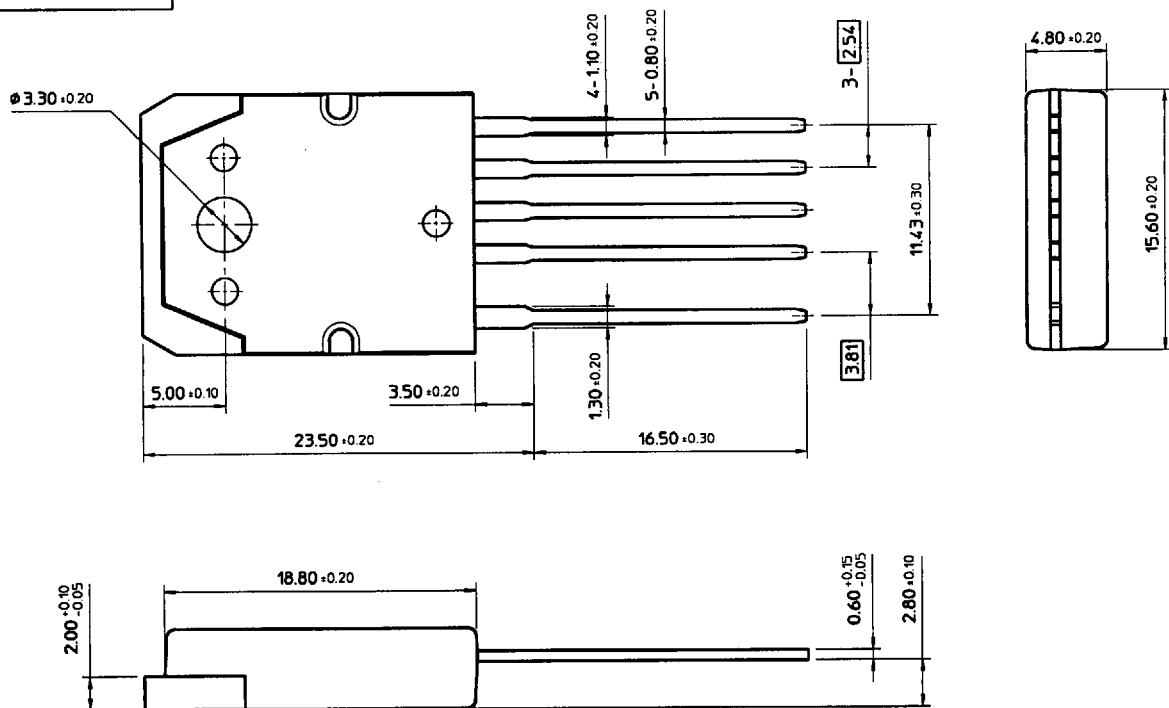

Under Development