


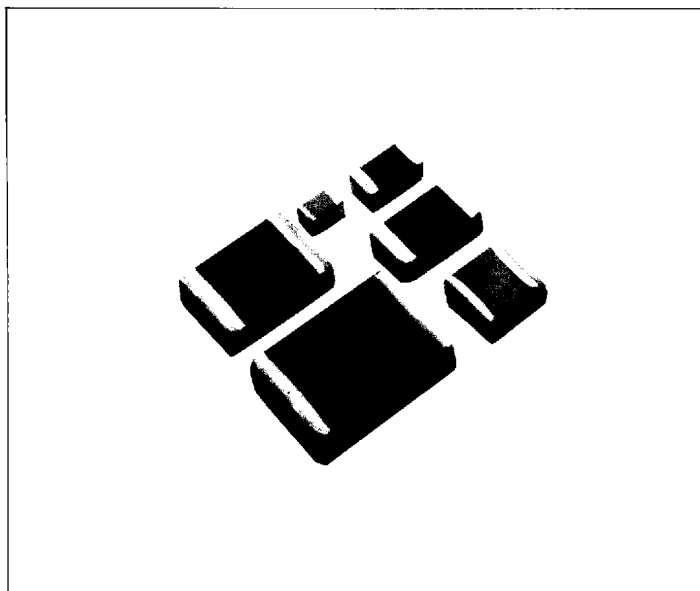

Introduction

Tokin is proud to present our new multilayer ceramic capacitor, which is Reflow type, featuring a lower profile and "chip-type" configuration designed especially for surface mounting. Tokin's own high-dielectric-constant ceramic materials give these components remarkably high capacitance for their size. They're perfect for making smaller instruments, computers and electronic equipment.

Features

- Small size, high capacitance
- High reliability and long life
- Excellent frequency characteristics
- Humidity-proof
- Automatic mounting available for PC boards

New Multilayer Ceramic Capacitor

		10 μ F/25V		22 μ F/25V	
		Dimensions (mm)	Case Code	Dimensions (mm)	Case Code
New	Y5U	2.7×5.7×2.5	C205M C205F	5.0×5.7×2.5	C505F
Conventional	Y5U	6.3×10.0×3.0	C610F	—	—
	Y5V	4.0×8.0×2.5	C408F	6.3×10.0×3.0	C610F

Characteristics

Electrostatic Capacity	Temperature Characteristic Series					
	Y5U (Z5U)			Y5V		
	25V	50V	75V	25V	50V	75V
10 μ F	IE106ZY5U-C205M* ¹ IE106ZY5U-C205F* ¹	IH106ZY5U-C505F* ¹	IN106ZY5U-C610F* ¹	IE106Z5V-C408F	IH106ZY5V-C610F	IN106ZY5V-C812F
15 μ F	IE156ZY5U-C505F* ¹	IH156ZY5U-C610F* ¹	—	IE156ZY5V-C610F	IH156ZY5V-C812F	—
22 μ F	IE226ZY5U-C505F	IH226ZY5U-C610F* ¹	—	IE226ZY5V-C610F	IH226ZY5V-C812F	—
33 μ F	IE336ZY5U-C610F* ¹	IH336ZY5U-C812F* ²	—	IE336ZY5V-C610F	—	—
47 μ F	IE476ZY5U-C812F* ²	—	—	IE476ZY5V-C610F	—	—
100 μ F	—	—	—	IE107ZY5V-C812F	—	—

*¹New product *²The product is in the experimental stage.


Ceramic Capacitor End Termination

Nickel/Tin Plate Termination* ¹	IE106ZY5U-C205M
Fired-on End Termination	All Case Code

*¹New product.

CHIP-TYPE HIGH-CAPACITANCE MULTILAYER CERAMIC CAPACITOR


Shape and Dimensions

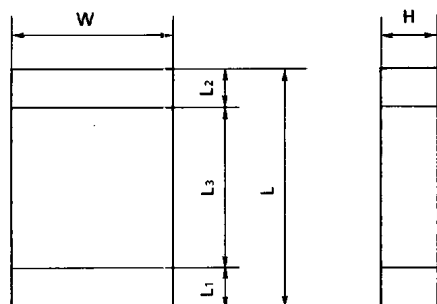

	W	L	H	L ₁ , L ₂	L ₃
C205 (SD)	2.7±0.3	5.7±0.4	2.5 max.	0.3~2.5	0.3 min.
C505 (SE)	5.0±0.4	5.7±0.5	3.0 max.	0.3~2.5	0.3 min.
C408 (SA)	4.0±0.4	8.0±0.5	3.2 max.	0.3~2.5	0.3 min.
C610 (SB)	6.3±0.4	10.0±0.5	4.5 max.	0.3~2.5	0.3 min.
C812 (SC)	8.0±0.4	12.5±0.5	4.5 max.	0.3~2.5	0.3 min.


Frequency Characteristics

●Y5U (Z5U), Y5V Series

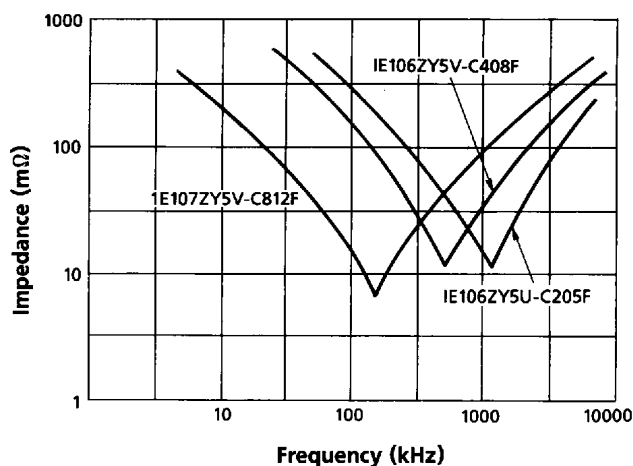


Stability at Low and High Temperature

●Y5V Series

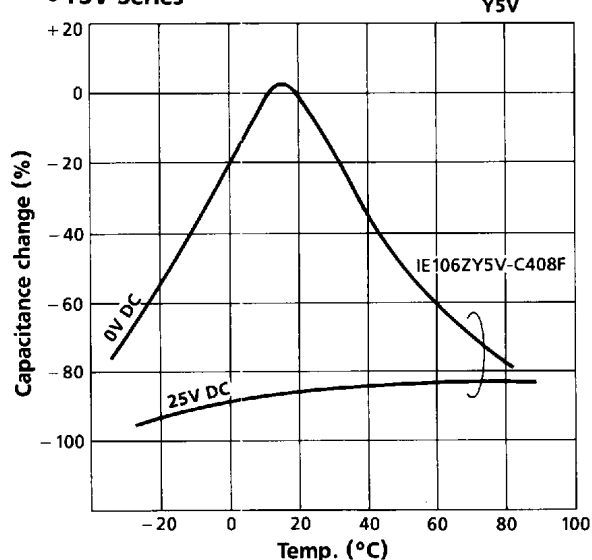

●Y5U (Z5U) Series

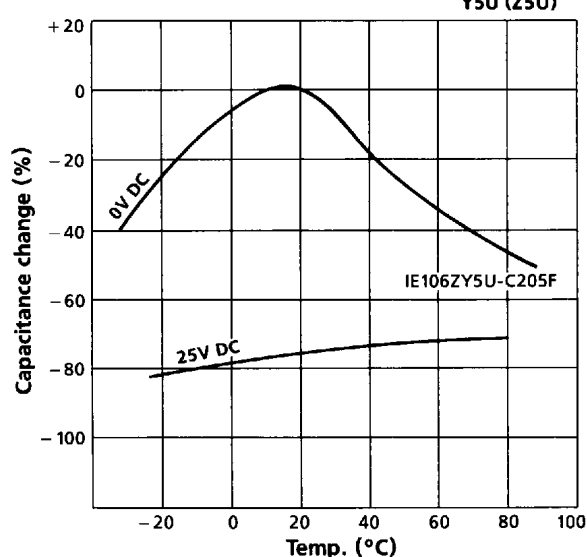

Specifications are subject to change without notice.

TOKIN

Tokin Corporation

Hazama Bldg., 5-8, Kita-Aoyama 2-chome, Minato-ku, Tokyo 107, Japan
Phone: 03-3402-6166 Fax: 03-3497-9756

Tokin America Inc.

155 Nicholson Lane, San Jose, California 95134, U.S.A.
Phone: 408-432-8020 Fax: 408-434-0375

Chicago Branch

9935 Capitol Drive, Wheeling, Illinois 60090, U.S.A.
Phone: 708-215-8802 Fax: 708-215-8804

Boston Branch

945 Concord Street, Framingham, Massachusetts 01701, U.S.A.
Phone: 508-875-0389 Fax: 508-875-1479

©1991 Tokin Corporation

Cat.No. FR-22E K910820
Printed in Japan