


TMM-119-01-G-S



TMM-120-01-T-S-SM

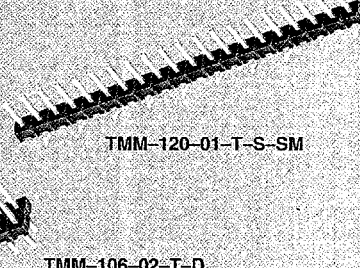

TMM-106-02-T-D

2mm LOW PROFILE STRIPS TMM SERIES

FLEX MOLD

Mates with:
CLT, SQT, ESQT, TLE
SMM, MMS, TCSD

Specifications:
TMM
HI-TEMP

Insulator Material:
Black Liquid Crystal Polymer

Terminal Material:
Phosphor Bronze

Current Rating:
3A @ 80°C ambient

Operating Temp Range:
-65°C to +105°C with Tin;

-65°C to +125°C with Gold

Max Processing Temp:
230°C for 60 seconds

Plating:
Sn or Au over 50µ" (1,27µm) Ni

SMT Lead Coplanarity:
.006" (0,15mm) max

TMM - **1** **NO. PINS PER ROW** - **LEAD STYLE** - **PLATING OPTION** - **ROW OPTION** - **OTHER OPTION**

01 thru 50

