


CHOKE COILS


MMICC SERIES



AXIAL LEADED LOOSE

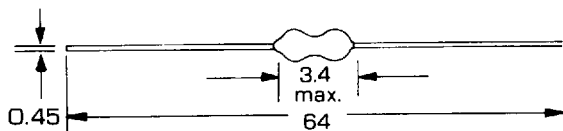

AXIAL PREFORMED

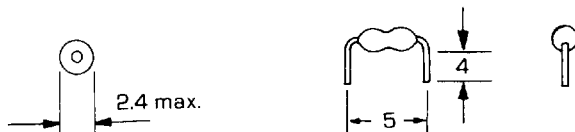

SPECIFICATIONS & STANDARD VALUES

Ordering Code	Inductance (μ H) Test at 20KHz	Inductance Tolerance (%)	Q min.	Testing Frequency (MHz)	S.R.F. MHz (min)	DC-Res. (Ω) (max)	Rated DC Current (mA)
MMICC-1R0	1.0	± 20	40	7.96	150	0.5	500
MMICC-1R2	1.2				110	0.50	500
MMICC-1R5	1.5				80	0.4	450
MMICC-1R8	1.8				60	0.4	430
MMICC-2R2	2.2				45	0.4	430
MMICC-2R7	2.7				40	0.70	335
MMICC-3R3	3.3				38	0.80	325
MMICC-3R9	3.9				35	1.1	320
MMICC-4R7	4.7				32	1.2	250
MMICC-5R6	5.6				30	1.3	250
MMICC-6R8	6.8	± 10	40	2.52	28	1.3	220
MMICC-8R2	8.2				26	1.6	180
MMICC-100	10				24	2.2	180
MMICC-120	12				22	2.3	165
MMICC-150	15				20	2.6	155
MMICC-180	18				18	3.00	150
MMICC-220	22				17	3.40	148
MMICC-270	27				16	4.30	145
MMICC-330	33				14	4.70	140
MMICC-390	39				13	5.20	135
MMICC-470	47	± 10	40	2.52	12	5.80	120
MMICC-560	56				11	6.40	110
MMICC-680	68				10	7.20	100
MMICC-820	82				9.5	11.0	95
MMICC-101	100				9.0	12.0	78

FERRITE