



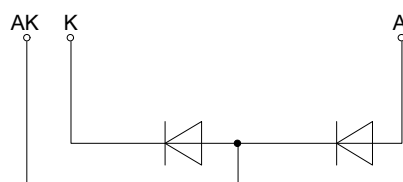

European Power-Semiconductor and Electronics Company GmbH + Co. KG

Marketing Information

DD 241 S

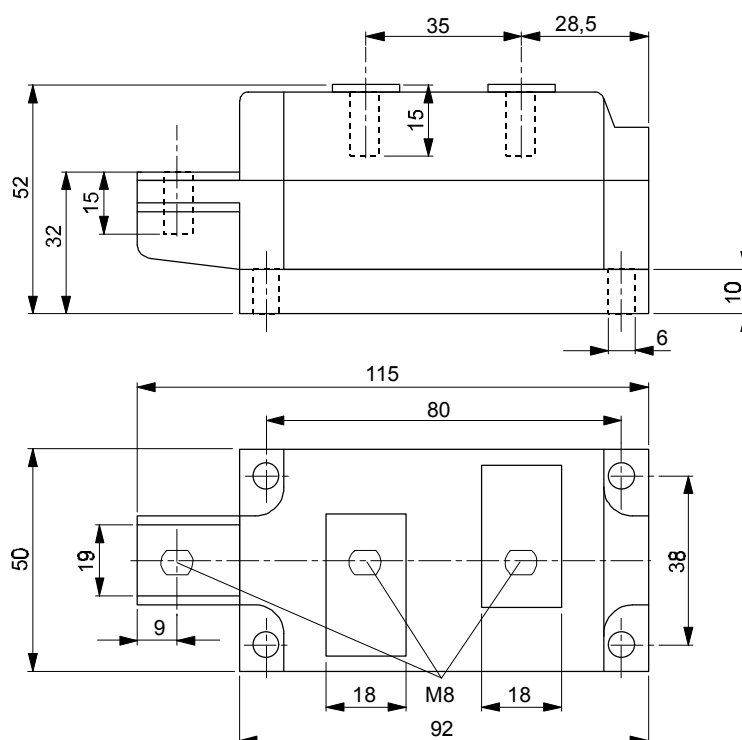

Elektrische Eigenschaften	Electrical properties				
Höchstzulässige Werte	Maximum rated values				
Periodische Spitzensperrspannung	repetitive peak reverse voltage	$t_{vj} = -40^{\circ}\text{C} \dots t_{vj \max}$	V_{RRM} DD 241 S:	1000 1200 1400	V
Stoßspitzenspannung	non-repetitive peak reverse voltage	$t_{vj} = +25^{\circ}\text{C} \dots t_{vj \max}$	$V_{RSM} = V_{RRM}$	+ 50	V
Durchlaßstrom-Grenzeffektivwert	RMS forward current		I_{FRMSM}	410	A
Dauergrenzstrom	average forward current	$t_c = 100^{\circ}\text{C}$	I_{FAVM}	240	A
		$t_c = 94^{\circ}\text{C}$		261	A
Stoßstrom-Grenzwert	surge current	$t_{vj} \leq 25^{\circ}\text{C}, t_p = 10 \text{ ms}$	I_{FSM}	9300	A
		$t_{vj} = t_{vj \max}, t_p = 10 \text{ ms}$		7500	A
Grenzlastintegral	$\int I^2 t$ -value	$t_{vj} \leq 25^{\circ}\text{C}, t_p = 10 \text{ ms}$	$\int I^2 t$	432000	A ² s
		$t_{vj} = t_{vj \max}, t_p = 10 \text{ ms}$		281000	A ² s
Charakteristische Werte	Characteristic values				
Durchlaßspannung	forward voltage	$t_{vj} = t_{vj \max}, i_F = 800 \text{ A}$	V_F	max. 1,55	V
Schleusenspannung	threshold voltage		$V_{(TO)}$	1,1	V
Ersatzwiderstand	slope resistance		r_T	0,5	mΩ
Sperrstrom	reverse current	$t_{vj} = t_{vj \max}, V_R = V_{RRM}$	i_R	max. 200	mA
Rückstromspitze	peak reverse recovery current	$t_{vj} = t_{vj \max}, i_{FM} = 250 \text{ A},$ $-di_F/dt = 100 \text{ A}/\mu\text{s}$	I_{RM}	max. 135	A
Sperrverzugsladung	recovered charge	$t_{vj} = t_{vj \max}, i_{FM} = 250 \text{ A}$ $-di_F/dt = 100 \text{ A}/\mu\text{s}$	Q_r	max. 250	μAs
Isolations-Prüfspannung	insulation test voltage	RMS, f = 50 Hz, t = 1 min.	V_{ISOL}	3	kV
Thermische Eigenschaften	Thermal properties				
Innerer Wärmewiderstand	thermal resistance, junction to case	$\Theta = 180^{\circ}\text{el. sin: pro Modul/per module}$ pro Zweig/per arm DC: pro Modul/per module pro Zweig/per arm	R_{thJC}	max. 0,075 max. 0,15 max. 0,072 max. 0,144	°C/W °C/W °C/W °C/W
Übergangs-Wärmewiderstand	thermal resistance, case to heatsink	pro Modul/per module pro Zweig/per arm	R_{thCK}	max. 0,02 max. 0,04	°C/W °C/W
Höchstzul.Sperrschichttemperatur	max. junction temperature		$t_{vj \max}$	150	°C
Betriebstemperatur	operating temperature		$t_{c \text{ op}}$	-40...+150	°C
Lagertemperatur	storage temperature		t_{stg}	-40...+150	°C
Mechanische Eigenschaften	Mechanical properties				
Si-Elemente mit Druckkontakt	Si-pellets with pressure contact				
Innere Isolation	internal insulation			AIN	
Anzugsdrehmomente	tightening torques				
mechanische Befestigung	mounting torque	Toleranz/tolerance +/- 15%	M1	6	Nm
elektrische Anschlüsse	terminal connection torque	Toleranz/tolerance +5%/-10%	M2	12	Nm
Gewicht	weight		G	typ. 800	g
Kriechstrecke	creepage distance			17	mm
Schwingfestigkeit	vibration resistance	f = 50 Hz		5 · 9,81	m/s ²
Maßbild	outline				8

DD 241 S kann auch mit gemeinsamer Anode oder gemeinsamer Kathode geliefert werden.

DD 241 S can also be supplied with common anode or common cathode.

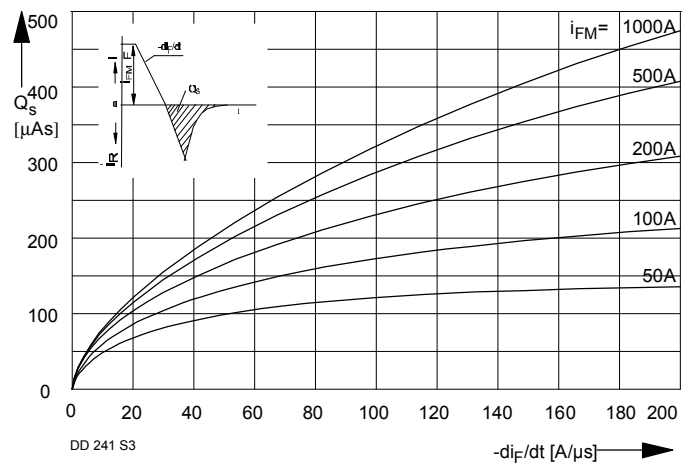


Bild / Fig. 2

Typische Abhängigkeit der oberen Sperrverzögerungsladung Q_s von der abkommütierenden Stromsteilheit $-di_F/dt$ bei $t_{vi \max}$.

Typical relationship between the maximum recovered charge Q_s and the rate of decay of forward current $-di_F/dt$ at $t_{vi \max}$

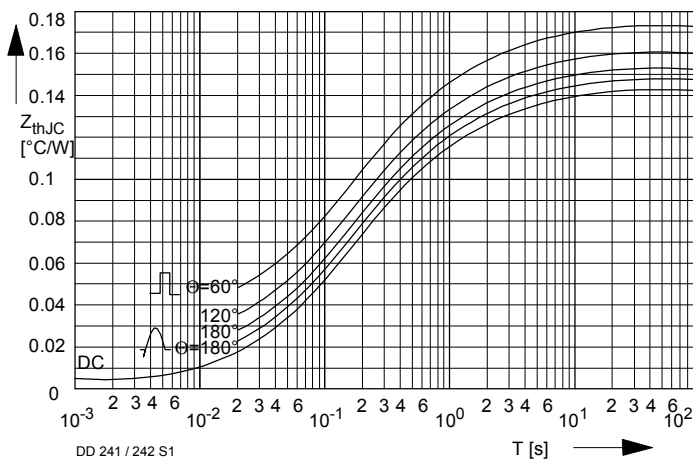


Bild / Fig. 3

Transienter innerer Wärmewiderstand $Z_{(th)JC}$ je Zweig bei sinus- und trapezförmigem Stromverlauf.

Transient thermal impedance $Z_{(th)JC}$, junction to case per arm at sinusoidal and trapezoidal current waveform.

Analytische Elemente des transienten Wärmewiderstandes Z_{thJC} pro Zweig für DC
Analytical elements of transient thermal impedance Z_{thJC} per arm for DC

Pos. n	1	2	3	4	5	6	7
$R_{thn} [^{\circ}C/W]$	0,0031	0,0097	0,0257	0,0529	0,0526		
$\tau_n [s]$	0,0009	0,008	0,11	0,61	3,06		

Analytische Funktion / Analytical function:

$$Z_{thJC} = \sum_{n=1}^{n_{max}} R_{thn} (1 - e^{-\frac{t}{\tau_n}})$$

Terms & Conditions of Usage

Attention

The present product data is exclusively subscribed to technically experienced staff. This Data Sheet is describing the specification of the products for which a warranty is granted exclusively pursuant the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its specifications. Changes to the Data Sheet are reserved.

You and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application. Should you require product information in excess of the data given in the Data Sheet, please contact your local Sales Office via "www.eupec.com / sales & contact".

Warning

Due to technical requirements the products may contain dangerous substances. For information on the types in question please contact your local Sales Office via "www.eupec.com / sales & contact".