

4.9-5.8 GHz High-Linearity Power Amplifier

SST11LP11



Preliminary Specifications

FEATURES:

- **Gain:**
 - ~24 dB gain across the 4.9-5.8 GHz band
- **High linear output power:**
 - ~25 dBm P1dB
 - EVM~4% at 18 dBm over 4.9-5.8 GHz for 64 QAM/54 Mbps operation
 - ACPR below IEEE 802.11a Mask up to 21 dBm across full band
- **Low idle current**
 - ~80 mA I_{CQ}
- **Low shut-down current (< 1 μA)**
- **20 dB dynamic range on-chip differential linear power detection**
- **Simple RF matching circuits**
- **Packages available**
 - 16-contact VQFN (3mm x 3mm)
 - Non-Pb (lead-free) packages available

APPLICATIONS:

- **WLAN (IEEE 802.11a)**
- **Japan WLAN**
- **HyperLAN2**
- **Multimedia**

PRODUCT DESCRIPTION

The SST11LP11 is a high-performance power amplifier IC based on the highly-reliable InGaP/GaAs HBT technology.

The SST11LP11 is designed to operate over the entire WLAN 802.11a band between 4.9-5.8 GHz frequency band for the U.S., European, and Japanese markets while achieving highly-linear power and low EVM.

The SST11LP11 power amplifier IC features easy board-level usage along with on-chip linear power detection and power-down control. These features coupled with low current draw at maximum linear power make the SST11LP11 ideal for battery-powered 802.11a WLAN transmitter applications.


The SST11LP11 is offered in 16-contact VQFN package. See Figure 1 for pin assignments and Table 1 for pin descriptions.



4.9-5.8 GHz High-Linearity Power Amplifier SST11LP11

Preliminary Specifications

FUNCTIONAL BLOCKS

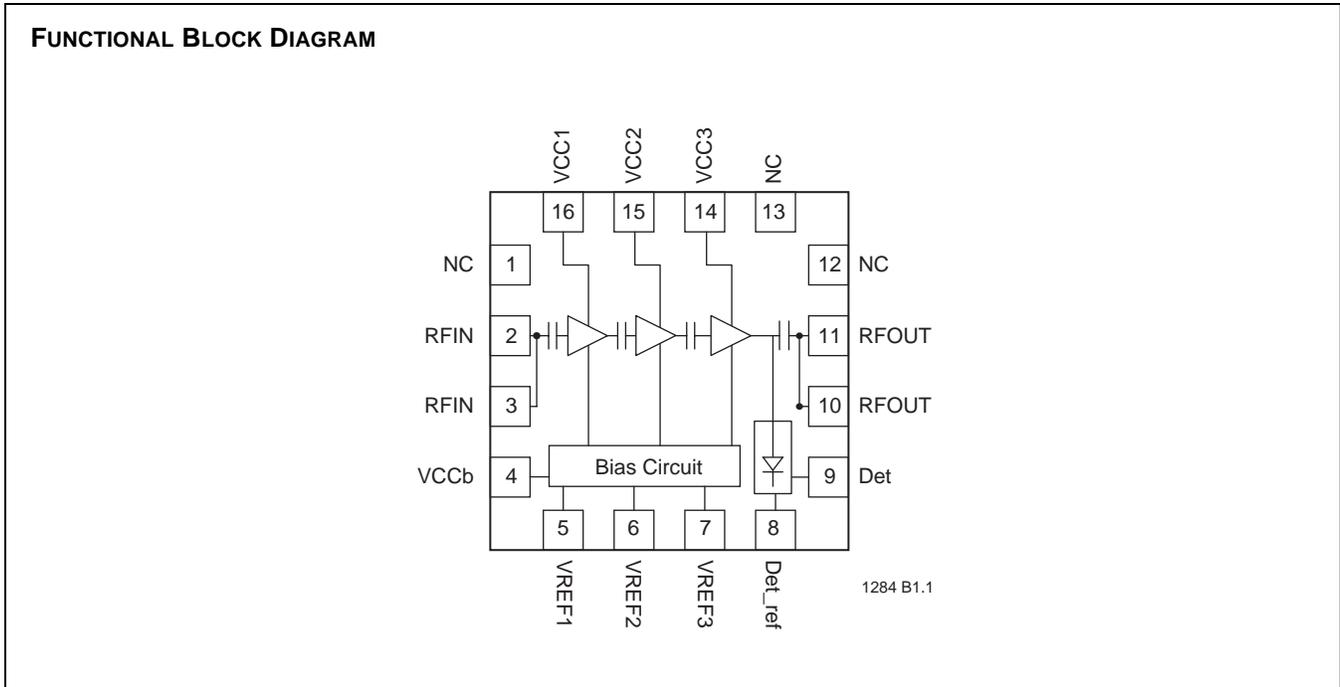



4.9-5.8 GHz High-Linearity Power Amplifier SST11LP11

Preliminary Specifications

PIN ASSIGNMENTS

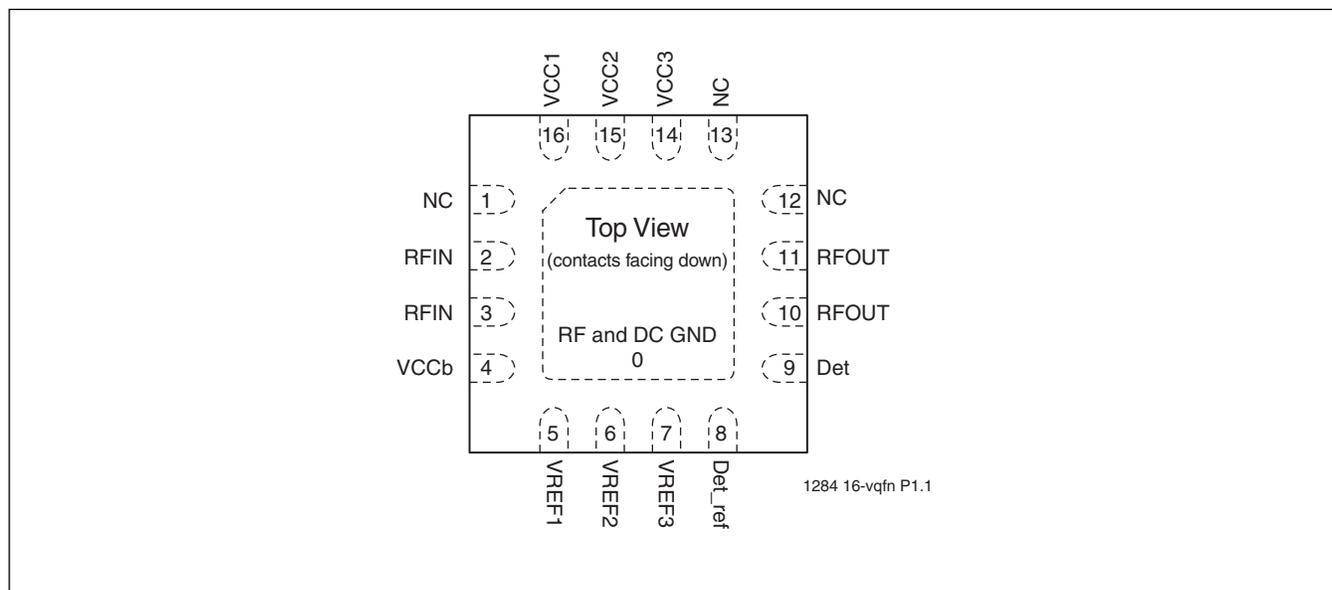


FIGURE 1: PIN ASSIGNMENTS FOR 16-CONTACT VQFN

PIN DESCRIPTIONS

TABLE 1: PIN DESCRIPTION

Symbol	Pin No.	Pin Name	Type ¹	Function
GND	0	Ground		The center pad should be connected to RF ground with several low inductance, low resistance vias.
NC	1	No Connection		Unconnected pins.
RFIN	2		I	RF input, DC decoupled
RFIN	3		I	RF input, DC decoupled
VCCb	4	Power Supply	PWR	Supply voltage for bias circuit
VREF1	5		PWR	1st stage idle current control
VREF2	6		PWR	2nd stage idle current control
VREF3	7		PWR	3rd stage idle current control
Det_ref	8		O	On-chip power detector reference
Det	9		O	On-chip power detector
RFOUT	10		O	RF output
RFOUT	11		O	RF output
NC	12	No Connection		Unconnected pins.
NC	13	No Connection		Unconnected pins.
VCC3	14	Power Supply	PWR	Power supply, 3rd stage
VCC2	15	Power Supply	PWR	Power supply, 2nd stage
VCC1	16	Power Supply	PWR	Power supply, 1st stage

1. I=Input, O=Output

T1.0 1284



4.9-5.8 GHz High-Linearity Power Amplifier SST11LP11

Preliminary Specifications

ELECTRICAL SPECIFICATIONS

The AC and DC specifications for the power amplifier interface signals. Refer to Table 2 for the DC voltage and current specifications. Refer to Figures 2 through 11 for the RF performance.

Absolute Maximum Stress Ratings (Applied conditions greater than those listed under “Absolute Maximum Stress Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these conditions or conditions greater than those defined in the operational sections of this data sheet is not implied. Exposure to absolute maximum stress rating conditions may affect device reliability.)

Supply Voltage to pins 4, 14, 15, 16 (V_{CC})	-0.3V to +5.5V
DC supply current (I_{CC})	500 mA
Operating Temperature (T_A)	-40°C to +85°C
Storage Temperature (T_{STG})	-40°C to +120°C
Maximum Junction Temperature (T_J)	+150°C
Surface Mount Solder Reflow Temperature:	“with-Pb” units ¹ : 240°C for 3 seconds
	“non-Pb” units: 260°C for 3 seconds

1. Certain “with-Pb” package types are capable of 260°C for 3 seconds; please consult the factory for the latest information.

OPERATING RANGE

Range	Ambient Temp	V_{CC}
Industrial	-40°C to +85°C	3.3V

TABLE 2: DC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Min.	Typ	Max.	Unit	Test Conditions
V_{CC}	Supply Voltage at pins 4, 14, 15, 16	2.7	3.3	4.2	V	
I_{CC}	Supply Current @ $P_{OUT}=21$ dBm $V_{CC}=3.3V$			260	mA	802.11a modulation
Det	Power detector output voltage	0.6		2.2	V	-10 to +22 dBm
Det_ref	Power detector output reference		0.6		V	
I_{CQ}	Idle current		80		mA	
I_{OFF}	Shut down current			<1.0	μA	
VREG1,2,3	Reference Voltages for typical applications		2.90		V	

T2.0 1284

TABLE 3: AC ELECTRICAL CHARACTERISTICS FOR CONFIGURATION

Symbol	Parameter	Min.	Typ	Max.	Unit
F_{L-U}	Frequency range	4.9		5.8	GHz
P_{OUT}	Output power @ $P_{IN} = -6$ dBm for OFDM signal		18		dBm
G	Small signal gain		24		dB
S	Power detector sensitivity		0.04		V/dB
G_{VAR1}	Gain variation over band (4900~5855 MHz)		1.75		dB
2f, 3f, 4f, 5f	Harmonics at 21 dBm		-40		dBc

T3.0 1284



4.9-5.8 GHz High-Linearity Power Amplifier SST11LP11

Preliminary Specifications

TYPICAL PERFORMANCE CHARACTERISTICS

TEST CONDITIONS: $V_{CC} = 3.3V$, $T_A = 25^\circ C$, $V_{REG1,2,3} = 2.85V$ UNLESS OTHERWISE NOTED

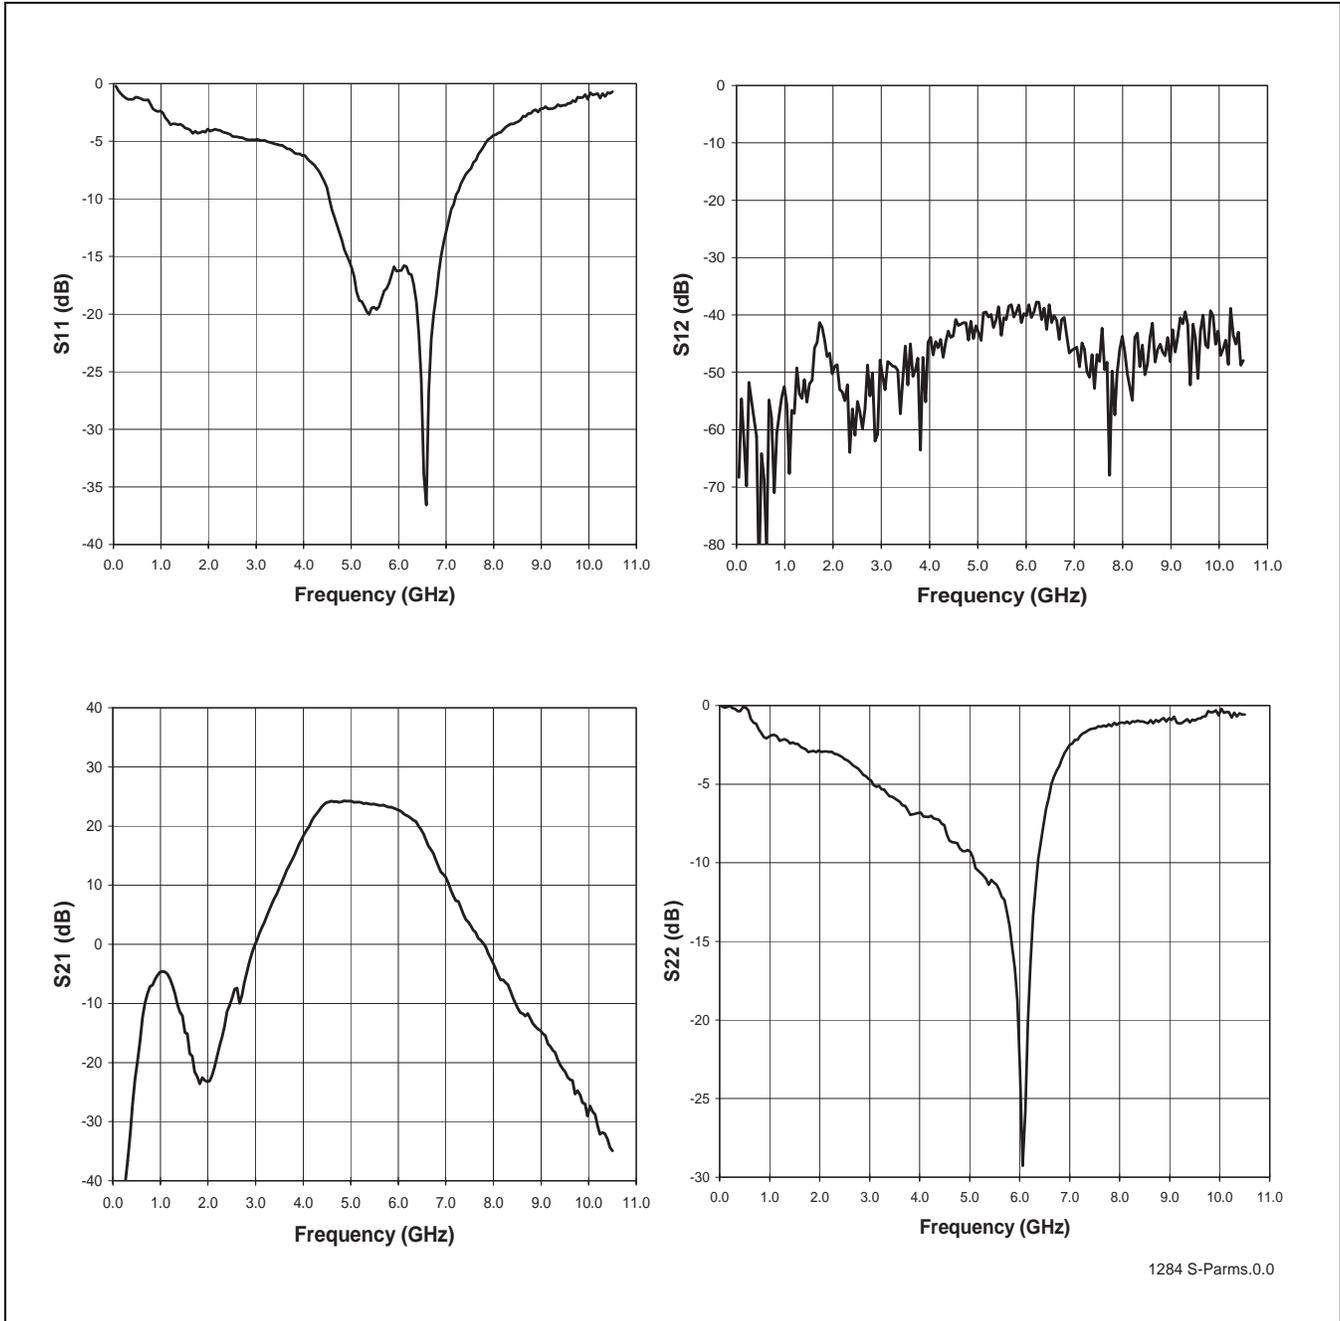


FIGURE 2: S-PARAMETERS



Preliminary Specifications

TWO-TONE MEASUREMENTS

TEST CONDITIONS: $\Delta F = 1$ MHz

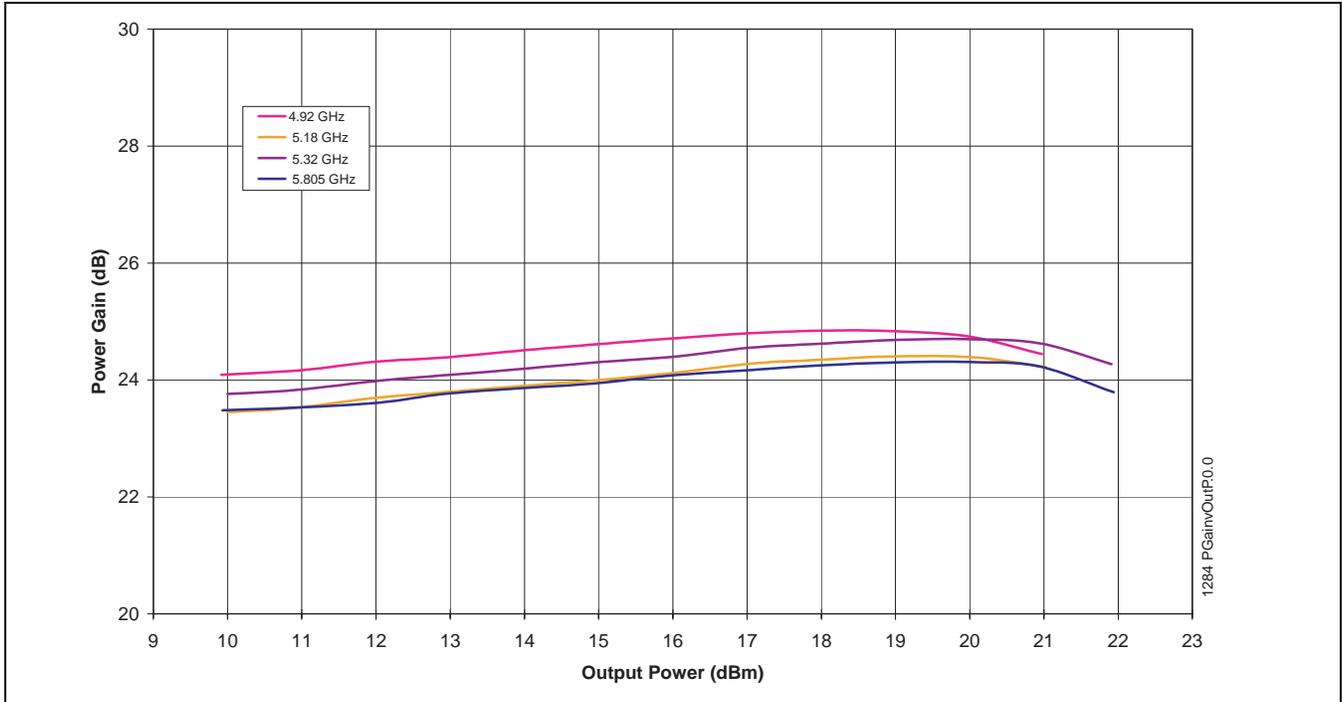


FIGURE 3: POWER GAIN VERSUS POWER OUTPUT

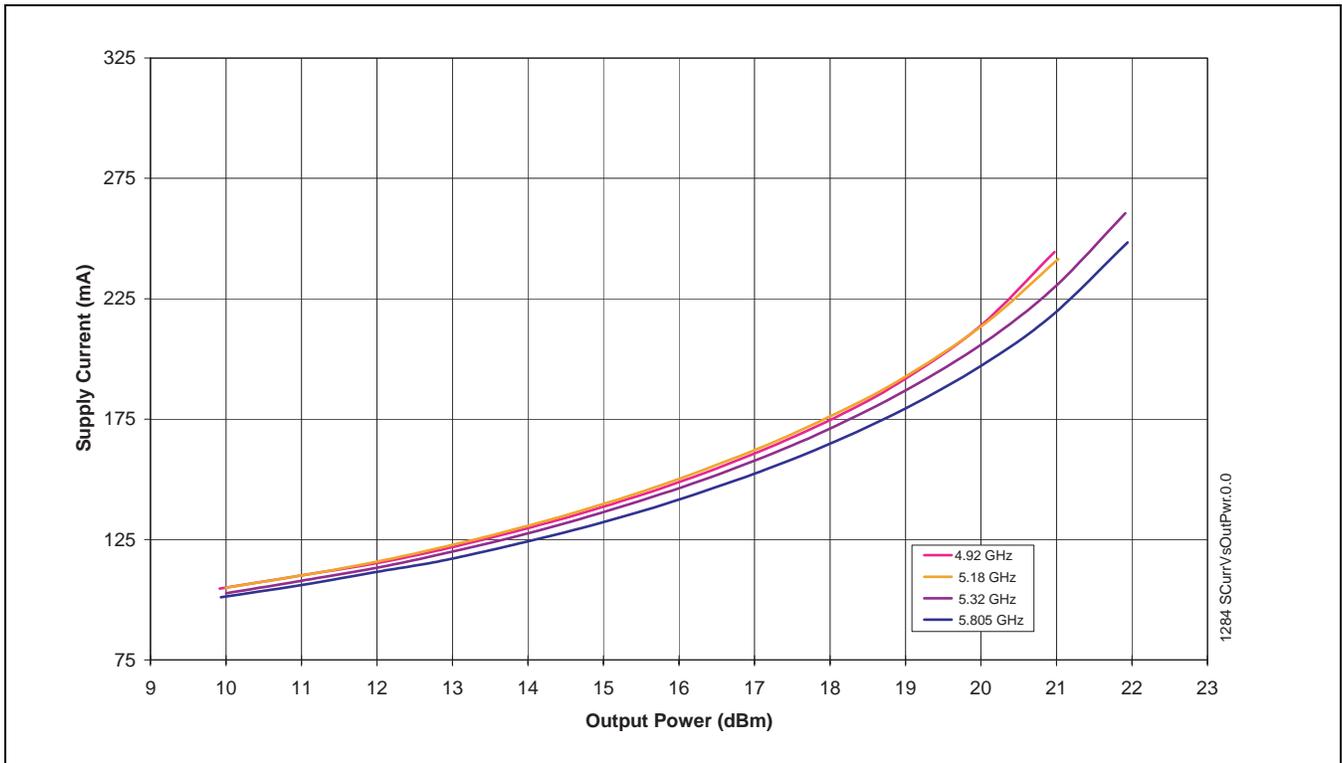


FIGURE 4: SUPPLY CURRENT VERSUS OUTPUT POWER



4.9-5.8 GHz High-Linearity Power Amplifier SST11LP11

Preliminary Specifications

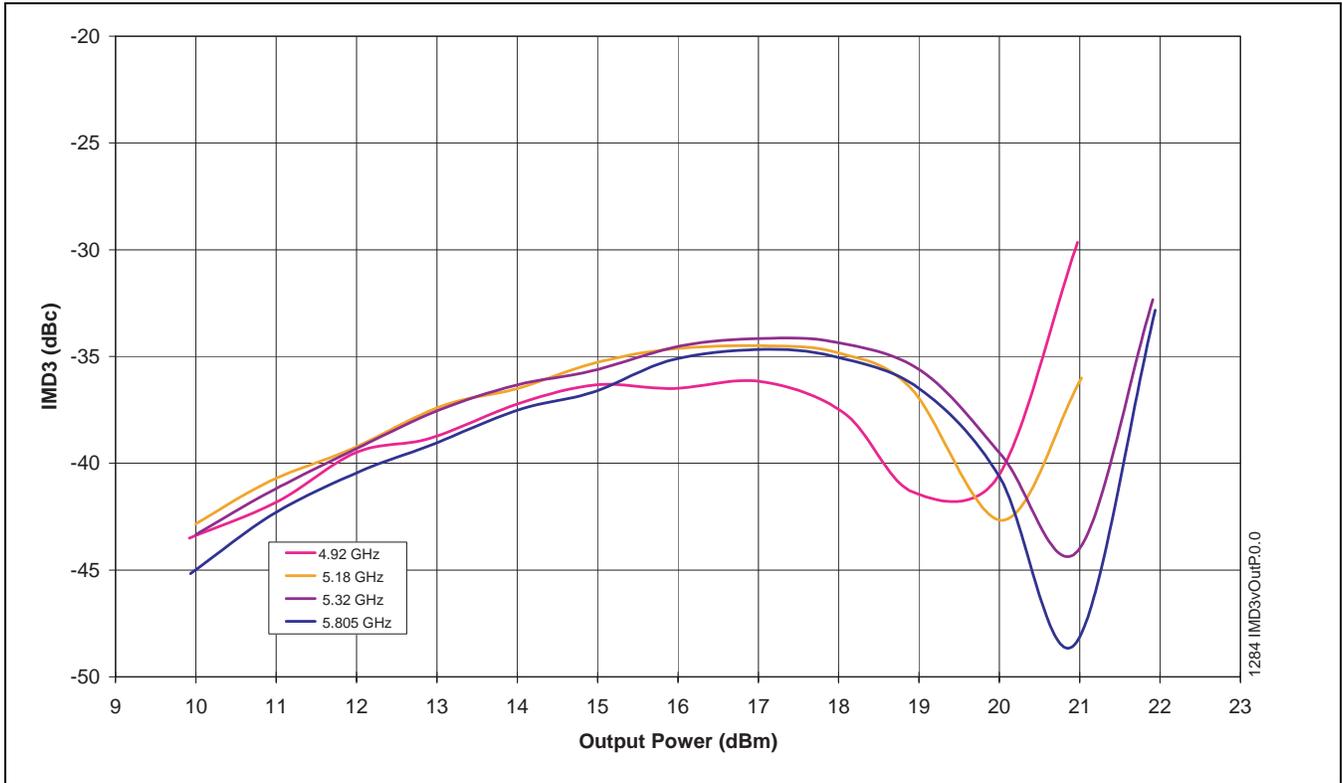


FIGURE 5: IMD3 VERSUS OUTPUT POWER

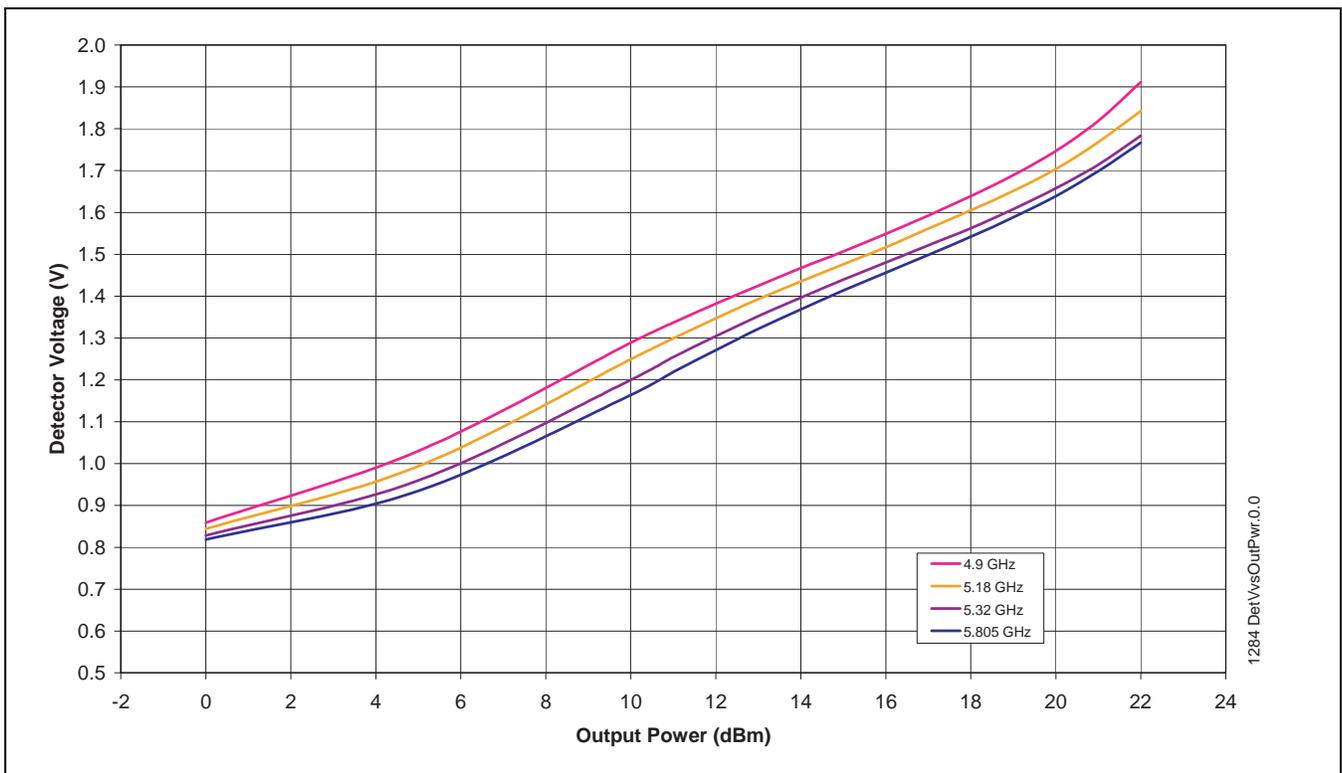


FIGURE 6: DETECTOR VOLTAGE VERSUS OUTPUT POWER



Preliminary Specifications

OFDM SIGNAL MEASUREMENTS
TEST CONDITIONS: 54 MBPS OFDM SIGNAL

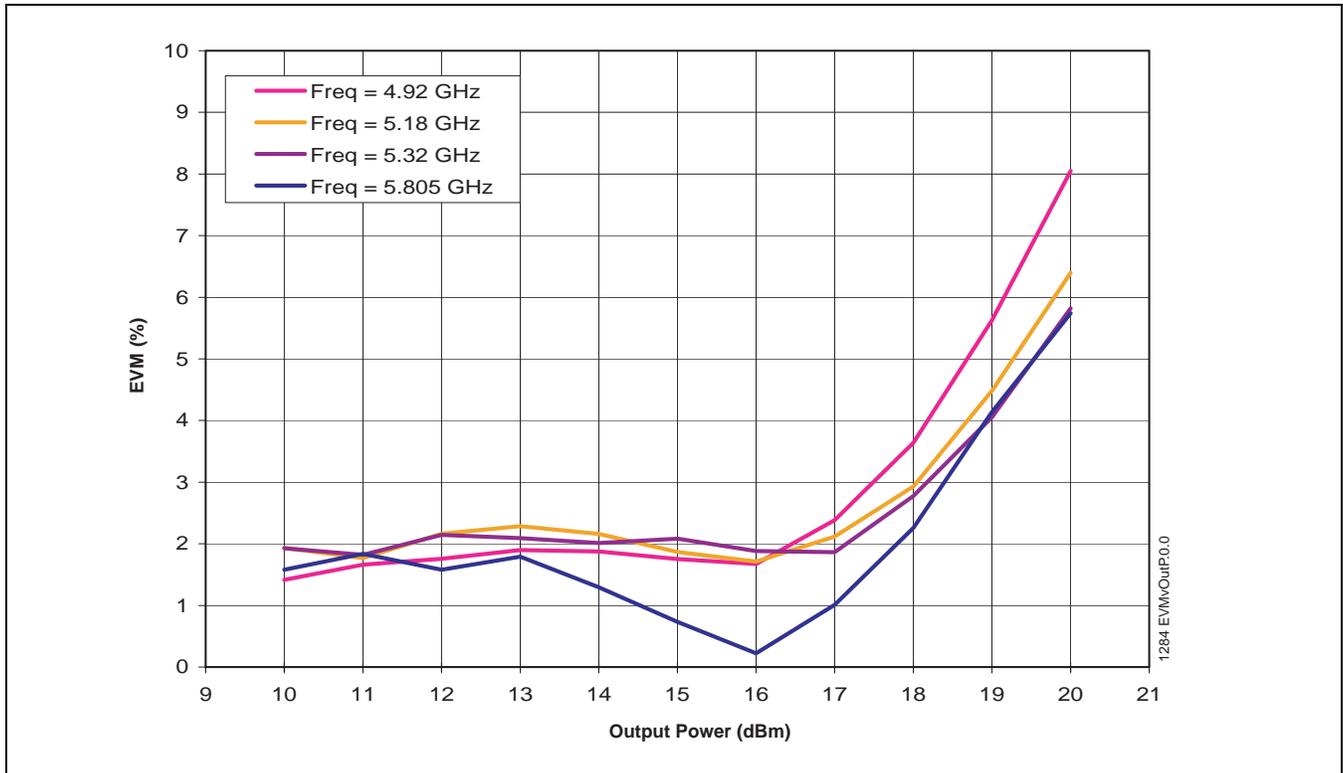


FIGURE 7: EVM VERSUS OUTPUT POWER

4.9-5.8 GHz High-Linearity Power Amplifier SST11LP11



Preliminary Specifications

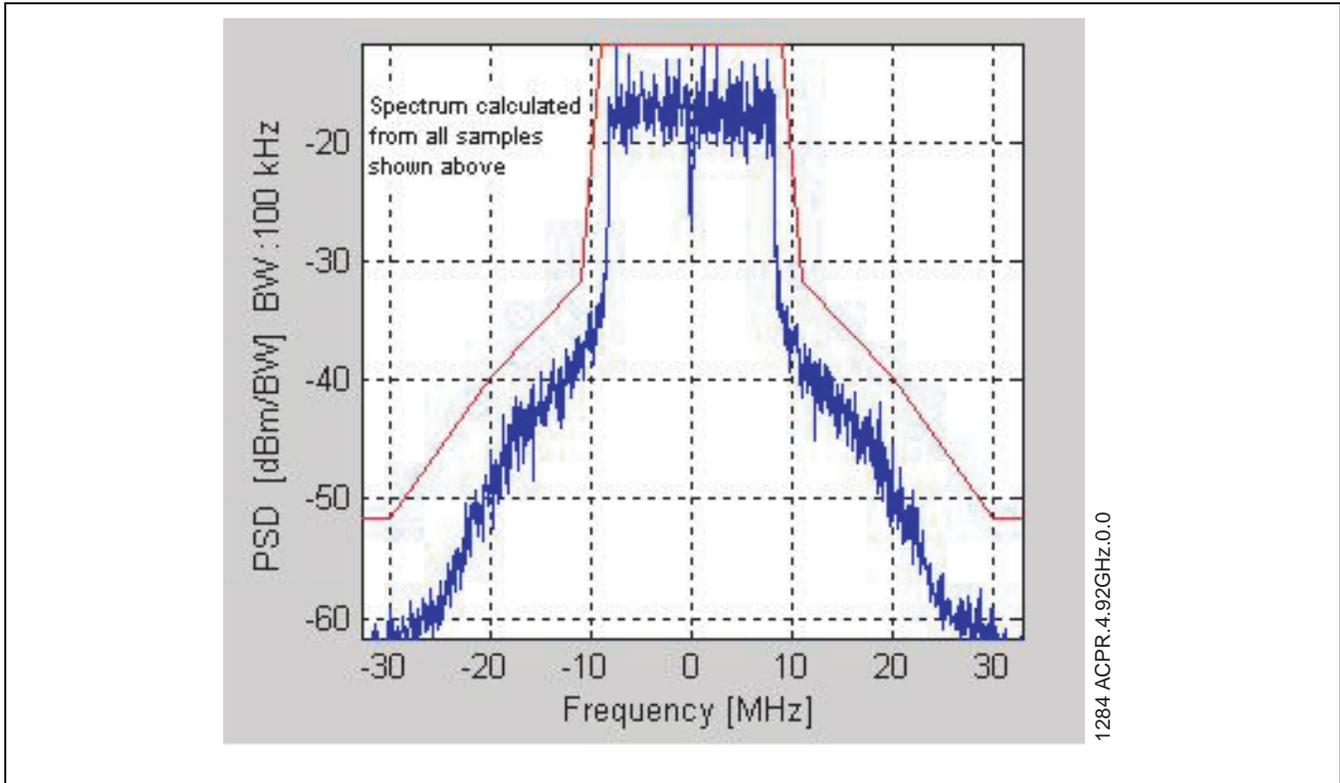


FIGURE 8: SPECTRUM MASK @ POUT = 21 DBM WITH FREQUENCY = 4.92 GHZ AND ICC = 235 MA

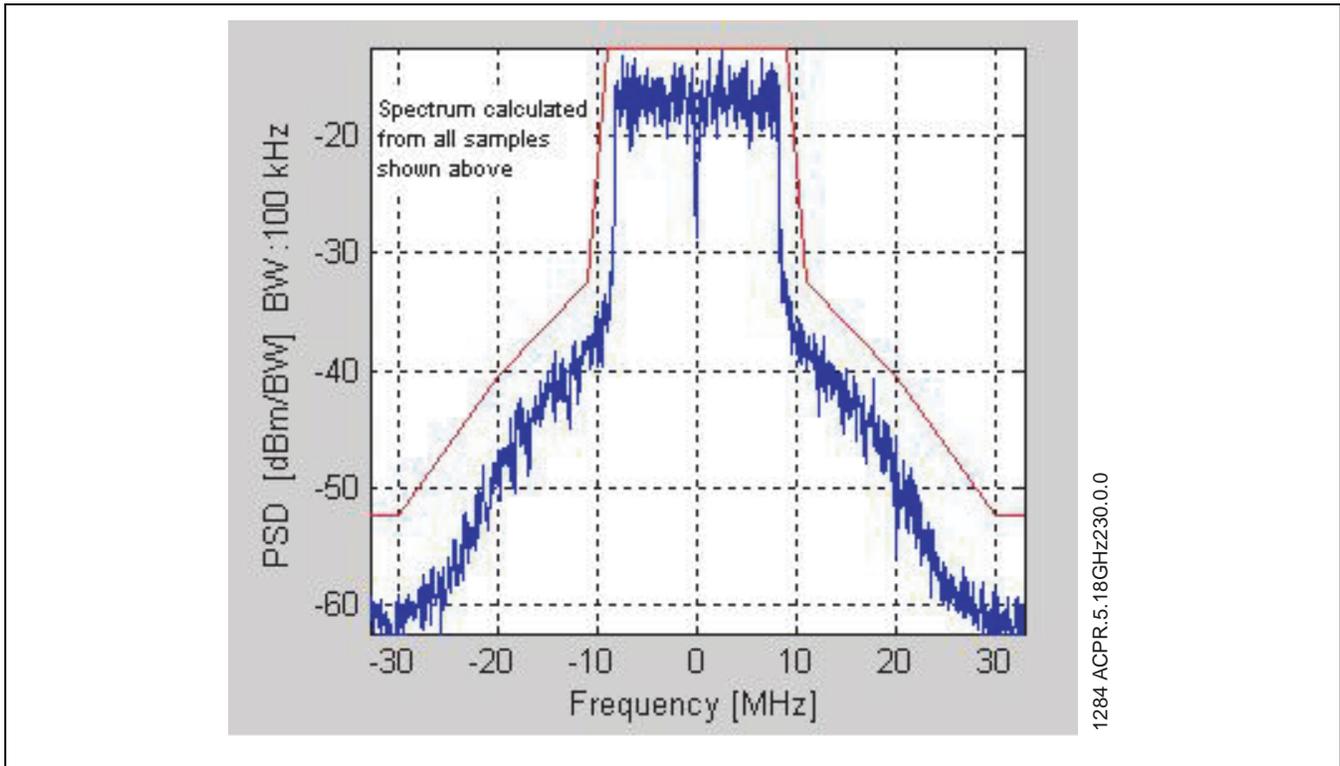


FIGURE 9: SPECTRUM MASK @ POUT = 21 DBM WITH FREQUENCY = 5.18 GHZ AND ICC = 230 MA



4.9-5.8 GHz High-Linearity Power Amplifier SST11LP11

Preliminary Specifications

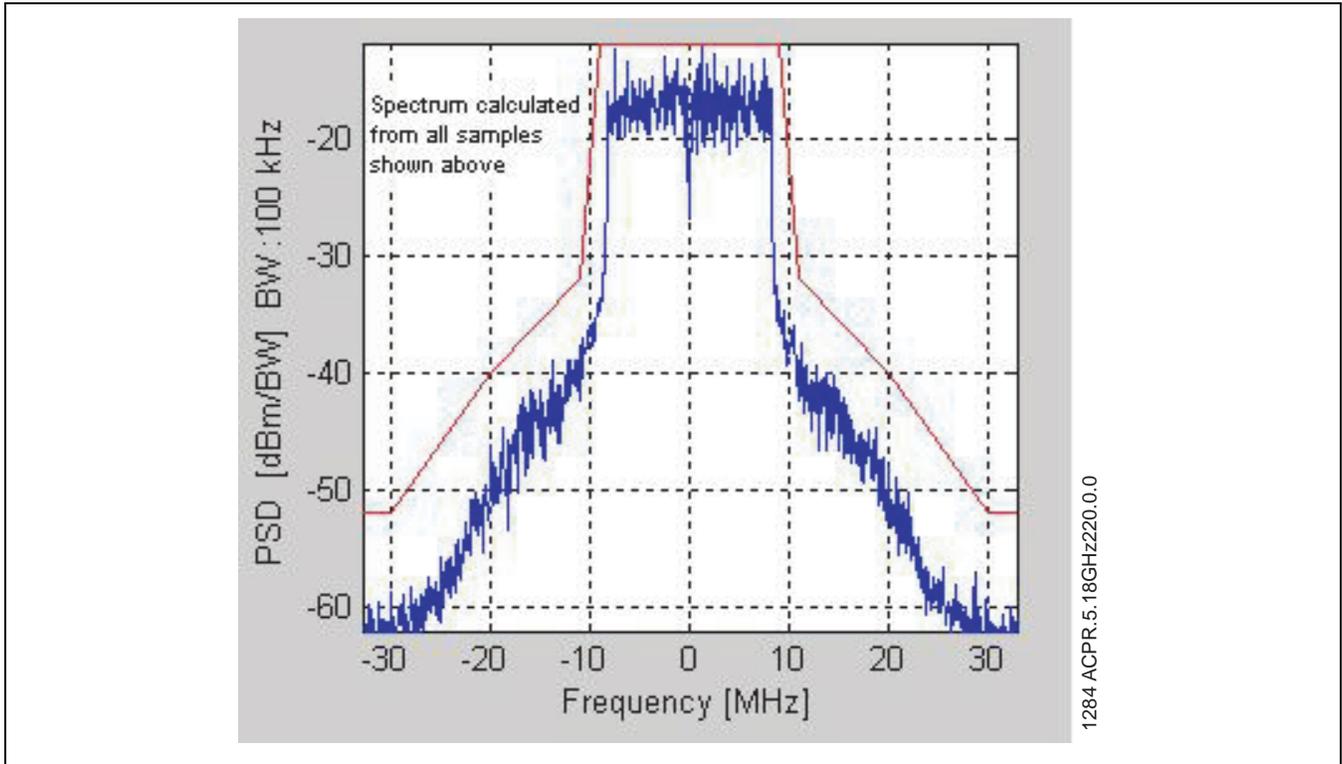


FIGURE 10: SPECTRUM MASK @ POUT = 21 DBM WITH FREQUENCY = 5.32 GHz AND ICC = 220 MA

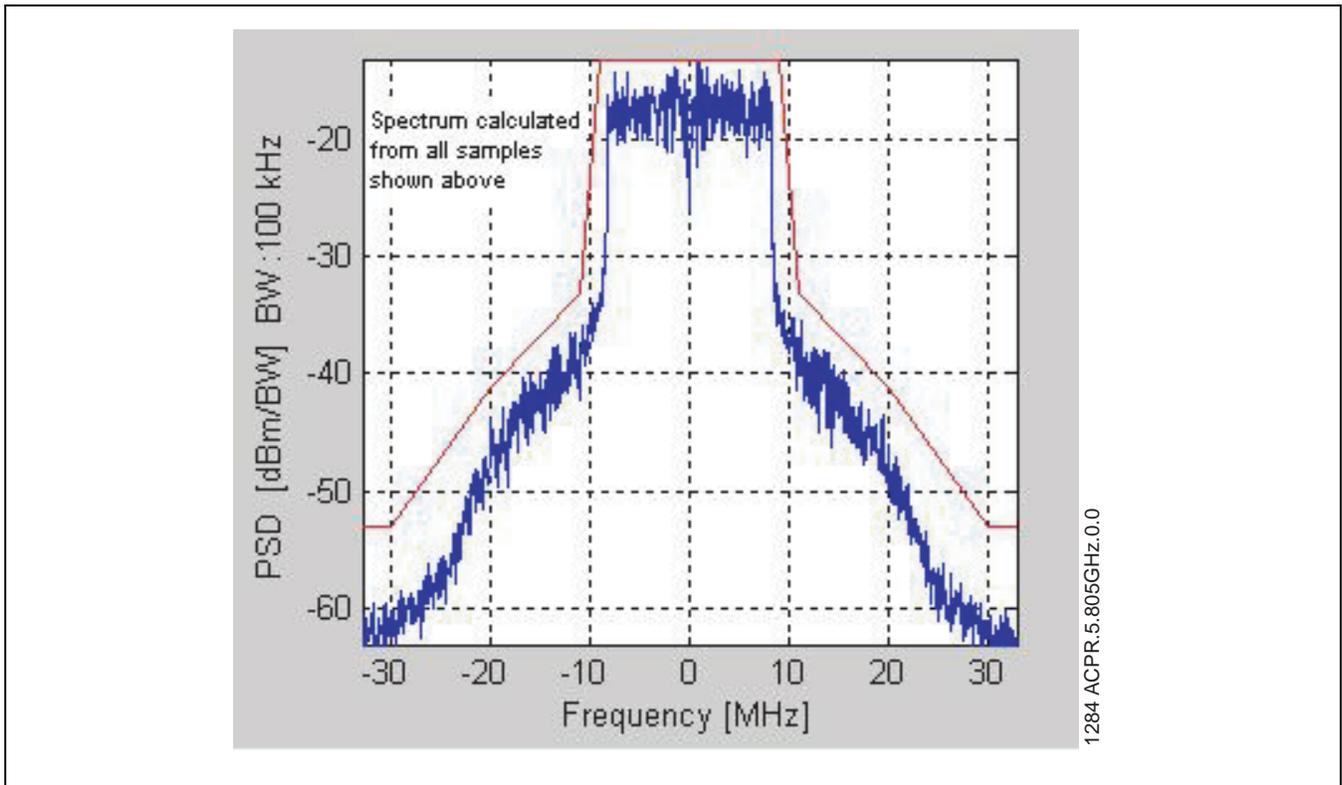


FIGURE 11: SPECTRUM MASK @ POUT = 21 DBM WITH FREQUENCY = 5.805 GHz AND ICC = 215 MA



4.9-5.8 GHz High-Linearity Power Amplifier SST11LP11

Preliminary Specifications


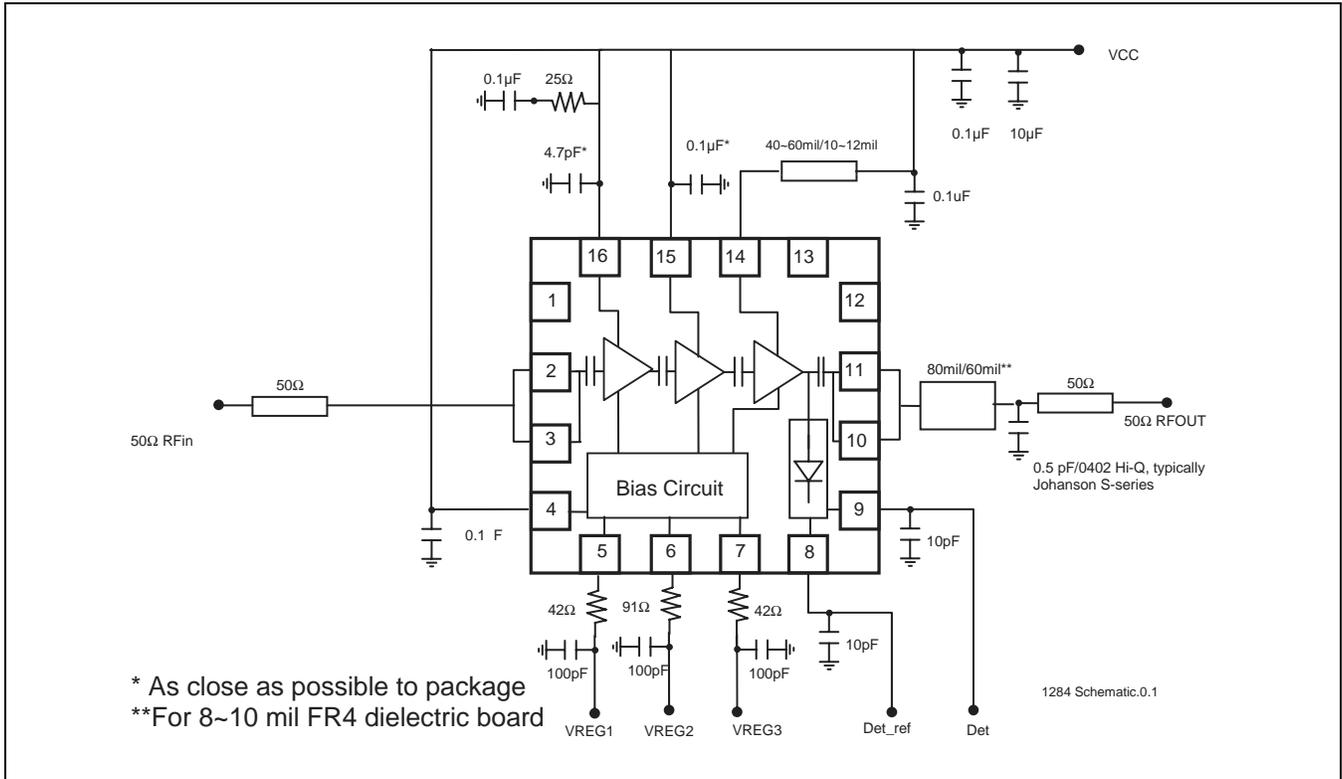


FIGURE 12: TYPICAL SCHEMATIC FOR HIGH-POWER, HIGH-EFFICIENCY 802.11A APPLICATIONS



Preliminary Specifications

PRODUCT ORDERING INFORMATION

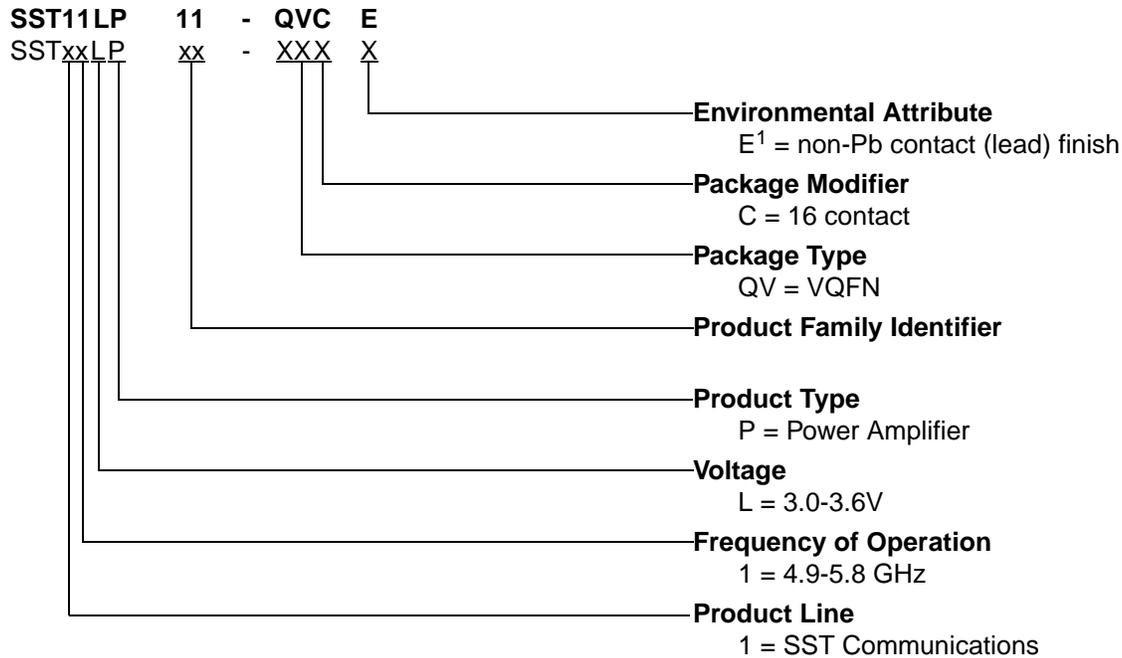

1. Environmental suffix "E" denotes non-Pb solder.
 SST non-Pb solder devices are "RoHS Compliant".

Valid combinations for SST11LP11

SST11LP11-QVC
 SST11LP11-QVCE

SST11LP11 Evaluation Kits

SST11LP11-QVC-K
 SST11LP11-QVCE-K


Note: Valid combinations are those products in mass production or will be in mass production. Consult your SST sales representative to confirm availability of valid combinations and to determine availability of new combinations.



4.9-5.8 GHz High-Linearity Power Amplifier SST11LP11

Preliminary Specifications

PACKAGING DIAGRAMS

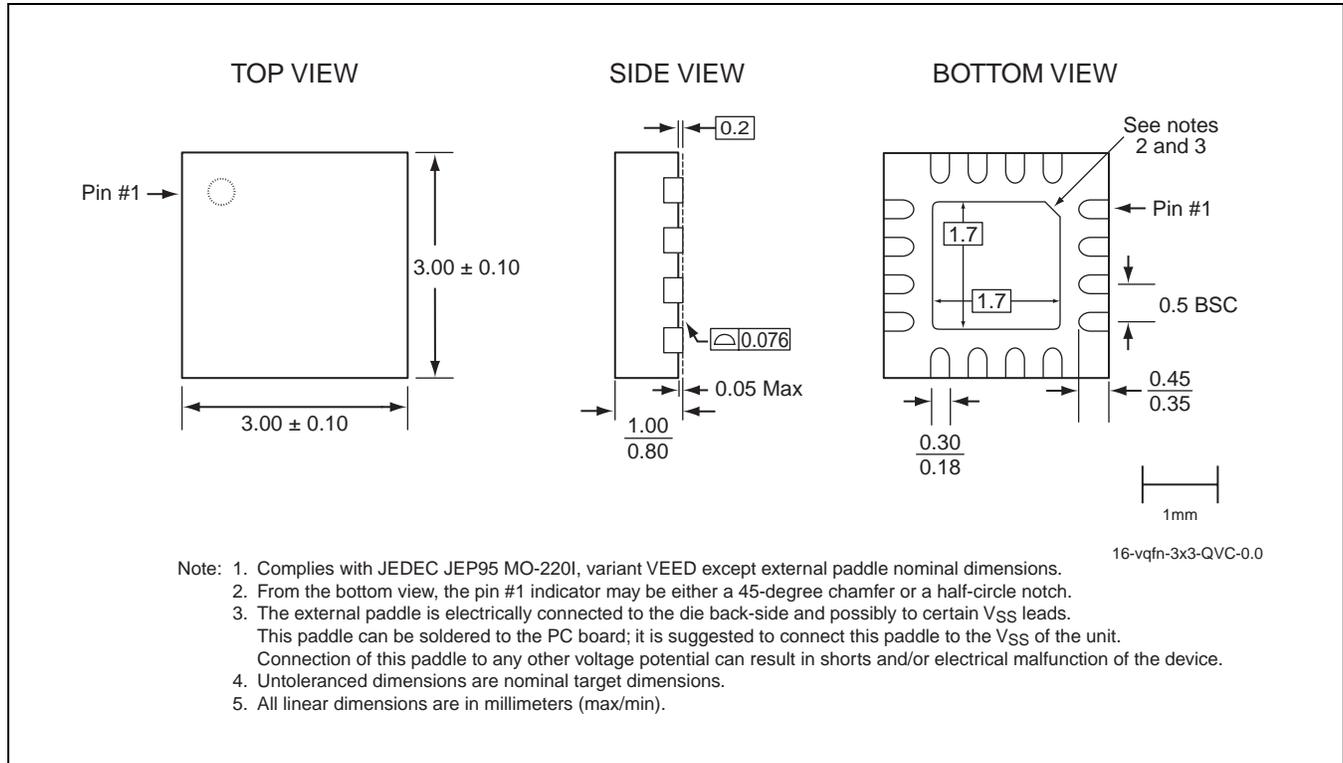

**16-CONTACT VERY-THIN QUAD FLAT NO-LEAD (VQFN)
SST PACKAGE CODE: QVC**

TABLE 4: REVISION HISTORY

Revision	Description	Date
00	• S71284: SST conversion of data sheet GP1111	Jan 2005



Preliminary Specifications

CONTACT INFORMATION

Marketing

SST Communications Corp.

2951 28th Street, Ste. 2040
Santa Monica, CA 90405
Tel: 310-581-1650 x27
Fax: 310-581-1663

Sales

NORTH AMERICA

Silicon Storage Technology, Inc.

Les Crowder
Technical Sales Support - Major Accounts
1922 Colina Salida Del Sol
San Clemente, CA 92673-3652 USA
Tel: 949-495-6437
Cell: 714-813-6636
Fax: 949-495-6364
E-mail: lcrowder@sst.com

ASIA PACIFIC NORTH

SST Macao

H. H. Chang
Senior Director, Sales
Room A, 8th Floor,
Macao Financial Centre,
No. 230-246, Rua Pequim, Macao
Tel: (853) 706-022
Fax: (853) 706-023
E-mail: hchang@sst.com

EUROPE

Silicon Storage Technology Ltd.

Ralph Thomson
Applications Manager
Mark House
9-11 Queens Road
Hersham KT12 5LU UK
Tel: +44 (0) 1869 321 431
Cell: +44 (0) 7787 508 919
E-mail: rthomson@sst.com

ASIA PACIFIC SOUTH

SST Communications Co.

Andy Chang
Director of Sales
2F, No. 415, Tiding Blvd., Sec.2,
Neihu, Taipei,
Taiwan, R.O.C.
Tel: 02-2656-2888 x220
Fax: 02-2656-2889
E-mail: achang@sst.com

JAPAN

SST Japan

Yashushi Yoshinaga
Sales Manager
6F Kose #2, 1-14-20 Shin-Yokohama,
Kohoku-ku, Yokohama 222-0033
Kanagawa, Japan
Tel: (81) 45-471-1851
Fax: (81) 45-471-3285
Email: yoshi@sst.com

KOREA

SST Korea

Charlie Shin
Country Manager
Rm# 1101 DonGu Root Bldg, 16-2 Sunae-Dong,
Bundang-Gu, Sungnam, Kyunggi-Do
Korea, 463-020
Tel: (82) 31-715-9138
Fax: (82) 31-715-9137
Email: cshin@sst.com