

LAN

10/100 Base-T Single Port


6683 - 6686



- Meets IEEE 802.3 and ANSI X3.263 standards
- Including 350 uH OCL with 8 mADC bias
- Suitable for reflow soldering at temperatures up to 235°C
- Smallest, low profile, SMD package available



MECHANICAL (All dimensions in inches)

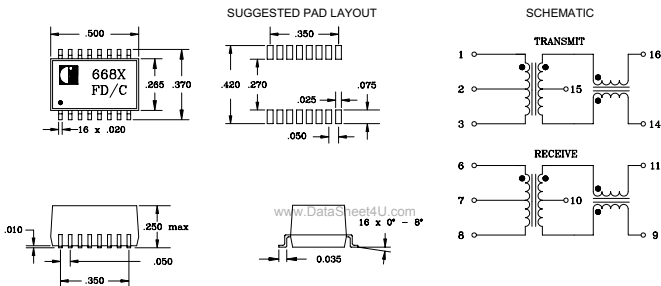

ELECTRICAL SPECIFICATION @ 25°C

Part Number	Turns Ratio		Insertion Loss 0.1 - 100 MHz (dB Max)	Return Loss (dB Typ)			Differential to Common Mode Rejection (dB Min)			Crosstalk (dB Min)			Hipot (Vrms) MIN
	Transmit	Receive		30 MHz	60 MHz	80 MHz	30 MHz	50 MHz	100 MHz	30 MHz	60 MHz	100 MHz	
6683	2:1	1:1	1.1	-20	-14	-11.5	-42	-37	-33	-45	-40	-35	1500
6684	1.25:1	1:1	1.1	-20	-14	-11.5	-42	-37	-33	-45	-40	-35	1500
6685	1:1	1:1	1.1	-20	-14	-11.5	-42	-37	-33	-45	-40	-35	1500
6686	1:1.414	1:1	1.1	-18	-12	-11.5	-42	-37	-30	-45	-40	-35	1500

ISSUE: B 30/01/02 6683-6686



229 Colonnade Road, Nepean, Ontario, Canada K2E 7K3
Tel: (613) 226-1626 Fax: (613) 226-7124 www.filtran.com