


**NPN PRE-BIASED SMALL SIGNAL SOT-363
DUAL SURFACE MOUNT TRANSISTOR**
Features

- Epitaxial Planar Die Construction
- Complementary PNP Types Available (DDA)
- Built-In Biasing Resistors
- Also Available in Lead Free Version



Mechanical Data

- Case: SOT-363, Molded Plastic
- Moisture sensitivity: Level 1 per J-STD-020A
- Case material - UL Flammability Rating 94V-0
- Terminals: Solderable per MIL-STD-202, Method 208
- Also Available in Lead Free Plating (Matte Tin Finish). Please see Ordering Information, Note 4, on Page 3
- Terminal Connections: See Diagram
- Marking: Date Code and Marking Code (See Diagrams & Page 3)
- Weight: 0.006 grams (approx.)
- Ordering Information (See Page 3)

P/N	R1	R2	MARKING
DDC124EU	22K Ω	22K Ω	N17
DDC144EU	47K Ω	47K Ω	N20
DDC114YU	10K Ω	47K Ω	N14
DDC123JU	2.2K Ω	47K Ω	N06
DDC114EU	10K Ω	10K Ω	N13
DDC143TU	4.7K Ω	-	N07
DDC114TU	10K Ω	-	N12

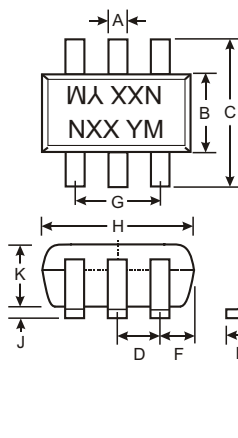

SOT-363		
Dim	Min	Max
A	0.10	0.30
B	1.15	1.35
C	2.00	2.20
D	0.65 Nominal	
F	0.30	0.40
H	1.80	2.20
J	—	0.10
K	0.90	1.00
L	0.25	0.40
M	0.10	0.25
α	0°	8°
All Dimensions in mm		


R₁, R₂

R₁ Only

SCHEMATIC DIAGRAM

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Supply Voltage, (3) to (1)	V _{CC}	50	V
Input Voltage, (2) to (1)	V _{IN}	-10 to +40 -10 to +40 -6 to +40 -5 to +12 -10 to +40 -5 V _{max} -5 V _{max}	V
Output Current	I _O	30 30 70 100 50 100 100	mA
Output Current All	I _C (Max)	100	mA
Power Dissipation (Total)	P _d	200	mW
Thermal Resistance, Junction to Ambient Air (Note 1)	R _{θJA}	625	°C/W
Operating and Storage and Temperature Range	T _j , T _{STG}	-55 to +150	°C

- Note: 1. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
2. 150mW per element must not be exceeded.

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic (DDC143TU & DDC114TU only)	Symbol	Min	Typ	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	BV _{CBO}	50	—	—	V	I _C = 50μA
Collector-Emitter Breakdown Voltage	BV _{CEO}	50	—	—	V	I _C = 1mA
Emitter-Base Breakdown Voltage	BV _{EBO}	5	—	—	V	I _E = 50μA
Collector Cutoff Current	I _{CBO}	—	—	0.5	μA	V _{CB} = 50V
Emitter Cutoff Current	I _{EBO}	—	—	0.5	μA	V _{EB} = 4V
Collector-Emitter Saturation Voltage	V _{CE(sat)}	—	—	0.3	V	I _C /I _B = 2.5mA / 0.25mA DDC143TU I _C /I _B = 1mA / 0.1mA DDC114TU
DC Current Transfer Ratio	h _{FE}	100	250	600	—	I _C = 1mA, V _{CE} = 5V
Input Resistor (R ₁) Tolerance	ΔR ₁	-30	—	+30	%	—
Gain-Bandwidth Product*	f _T	—	250	—	MHz	V _{CE} = 10V, I _E = -5mA, f = 100MHz

Characteristic		Symbol	Min	Typ	Max	Unit	Test Condition
Input Voltage	DDC124EU DDC144EU DDC114YU DDC123JU DDC114EU	V _{I(off)}	0.5 0.5 0.3 0.5 0.5	1.1 1.1 — — 1.1	—	V	V _{CC} = 5V, I _O = 100μA
	DDC124EU DDC144EU DDC114YU DDC123JU DDC114EU	V _{I(on)}	—	1.9 1.9 — — 1.9	3.0 3.0 1.4 1.1 3.0		V _O = 0.3, I _O = 5mA V _O = 0.3, I _O = 2mA V _O = 0.3, I _O = 1mA V _O = 0.3, I _O = 5mA V _O = 0.3, I _O = 10mA
Output Voltage	DDC124EU DDC144EU DDC114YU DDC123JU DDC114EU	V _{O(on)}	—	0.1	0.3	V	I _O /I _I = 10mA / 0.5mA I _O /I _I = 10mA / 0.5mA I _O /I _I = 5mA / 0.25mA I _O /I _I = 5mA / 0.25mA I _O /I _I = 10mA / 0.5mA
Input Current	DDC124EU DDC144EU DDC114YU DDC123JU DDC114EU	I _I	—	—	0.36 0.18 0.88 3.6 0.88	mA	V _I = 5V
Output Current		I _{O(off)}	—	—	0.5	μA	V _{CC} = 50V, V _I = 0V
DC Current Gain	DDC124EU DDC144EU DDC114YU DDC123JU DDC114EU	G _I	56 68 68 80 30	—	—	—	V _O = 5V, I _O = 5mA V _O = 5V, I _O = 5mA V _O = 5V, I _O = 10mA V _O = 5V, I _O = 10mA V _O = 5V, I _O = 5mA
Input Resistor (R ₁) Tolerance		ΔR ₁	-30	—	+30	%	—
Resistance Ratio Tolerance		R ₂ /R ₁	-20	—	+20	%	—
Gain-Bandwidth Product*		f _T	—	250	—	MHz	V _{CE} = 10V, I _E = 5mA, f = 100MHz


* Transistor - For Reference Only

Ordering Information (Note 3)

Device	Packaging	Shipping
DDC124EU-7	SOT-363	3000/Tape & Reel
DDC144EU-7	SOT-363	3000/Tape & Reel
DDC114YU-7	SOT-363	3000/Tape & Reel
DDC123JU-7	SOT-363	3000/Tape & Reel
DDC114EU-7	SOT-363	3000/Tape & Reel
DDC143TU-7	SOT-363	3000/Tape & Reel
DDC114TU-7	SOT-363	3000/Tape & Reel

- Notes:
- For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.
 - For Lead Free version (with Lead Free terminal finish) part number, please add "-F" suffix to part number above.
Example: DDC114TU-7-F.

Marking Information



NXX = Product Type Marking Code
 See Sheet 1 Diagrams
 YM = Date Code Marking
 Y = Year ex: N = 2002
 M = Month ex: 9 = September

Date Code Key

Year	2002	2003	2004	2005	2006	2007	2008	2009
Code	N	P	R	S	T	U	V	W

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

TYPICAL CURVES - DDC123JK

ONE SECTION

NEW PRODUCT

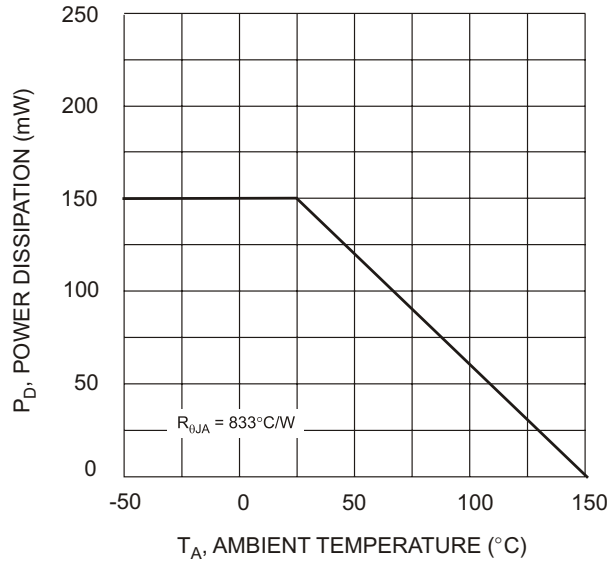


Fig. 1 Derating Curve

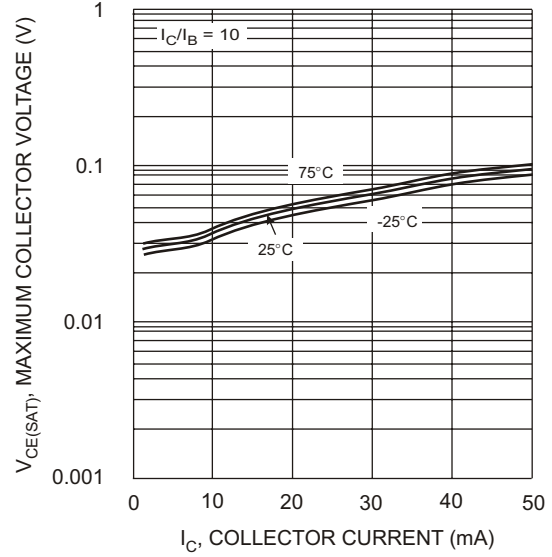


Fig. 2 $V_{CE(SAT)}$ vs. I_C

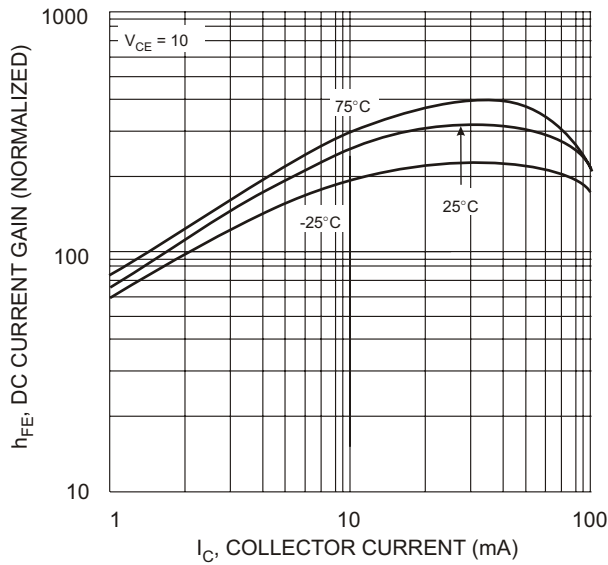


Fig. 3 DC Current Gain

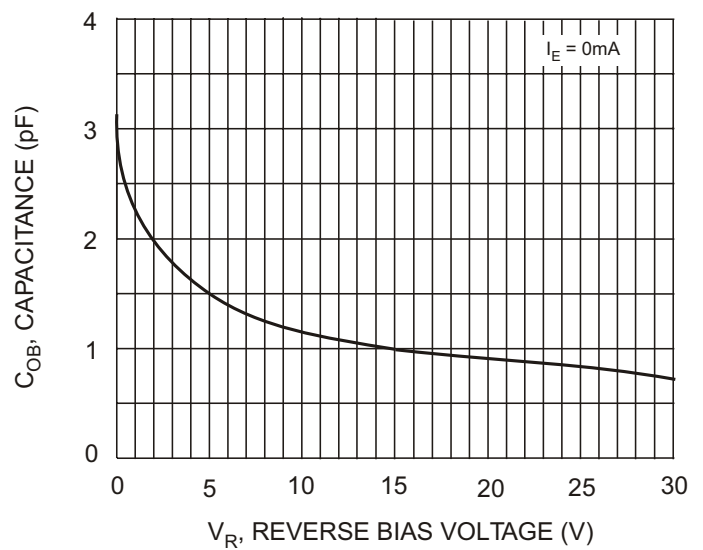


Fig. 4 Output Capacitance

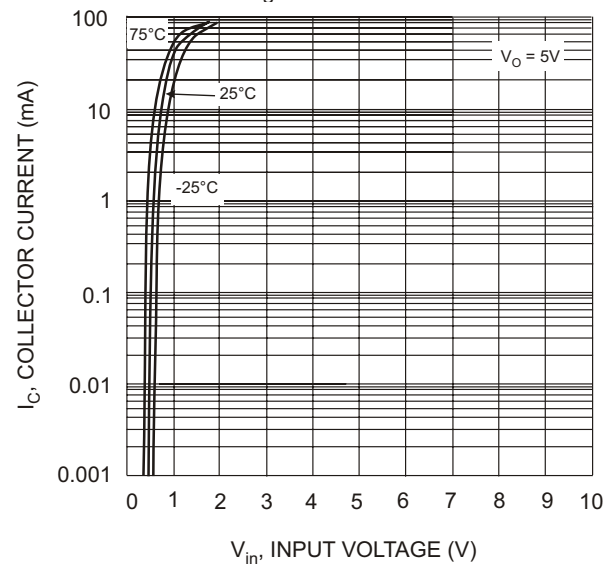


Fig. 5 Collector Current Vs. Input Voltage

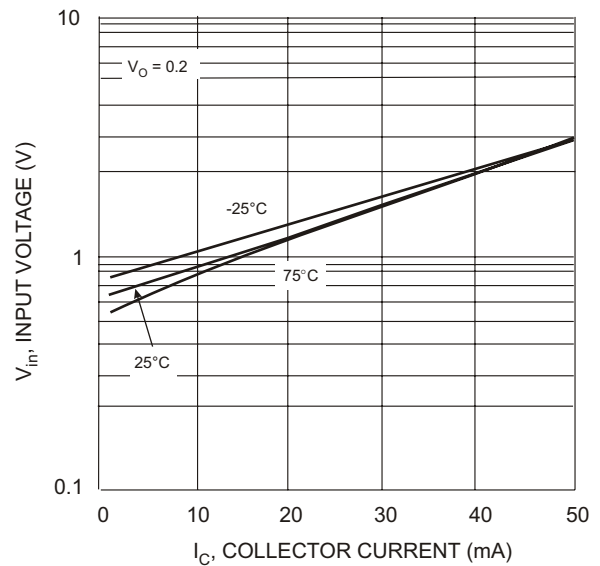


Fig. 6 Input Voltage vs. Collector Current

TYPICAL CURVES - DDC114TK
ONE SECTION

NEW PRODUCT

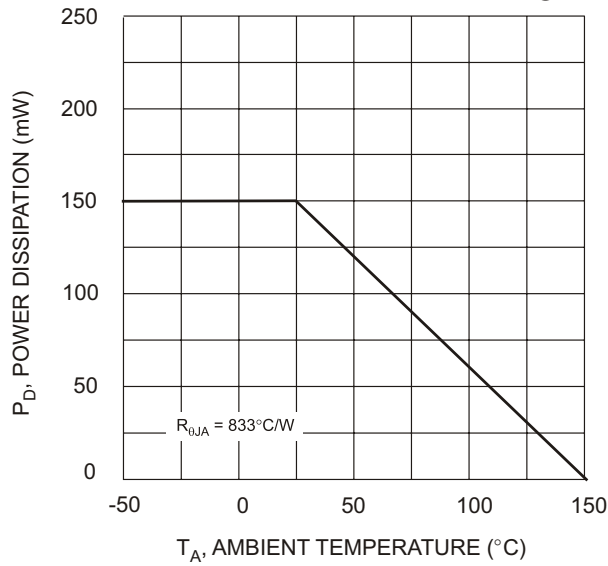


Fig. 1 Derating Curve

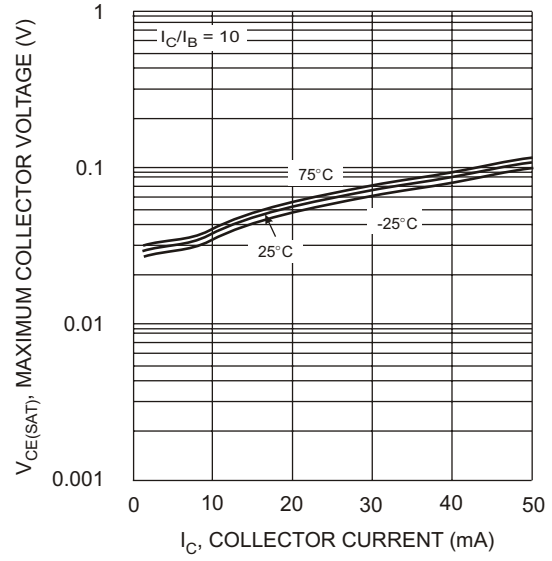
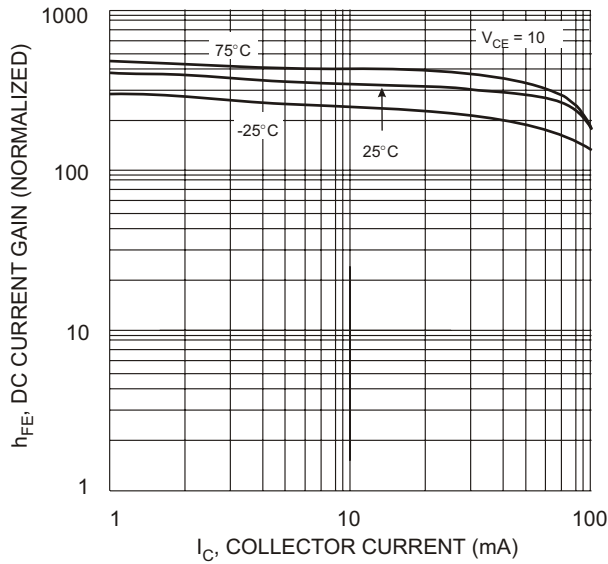

 Fig. 2 $V_{CE(SAT)}$ vs. I_C


Fig. 3 DC Current Gain

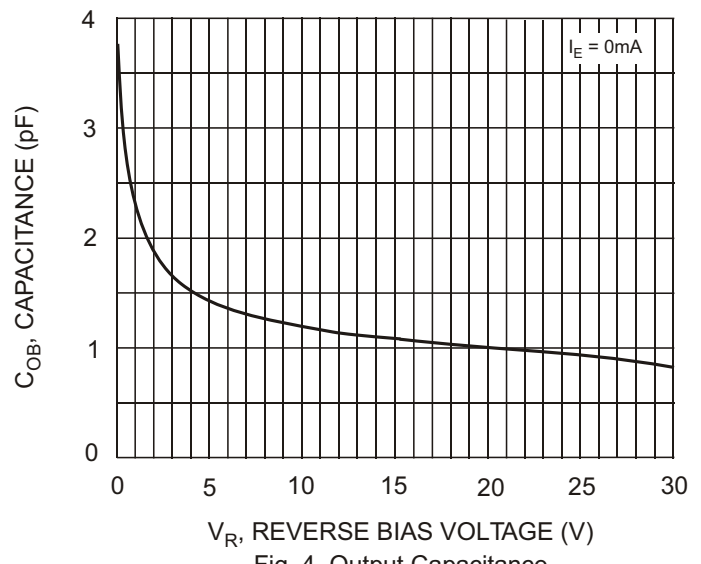


Fig. 4 Output Capacitance

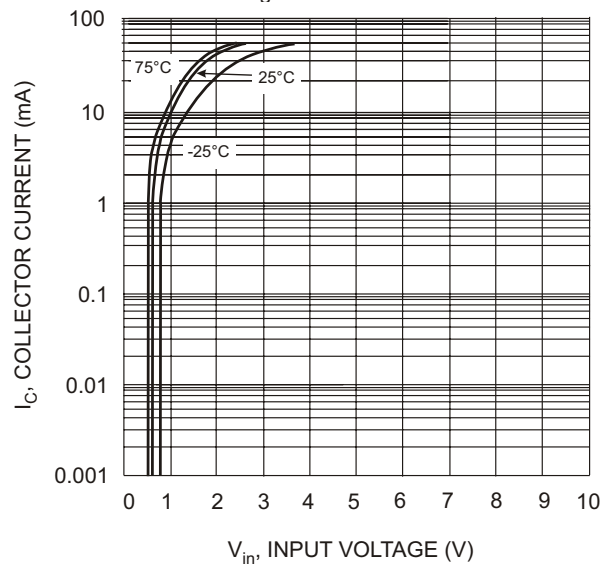


Fig. 5 Collector Current Vs. Input Voltage

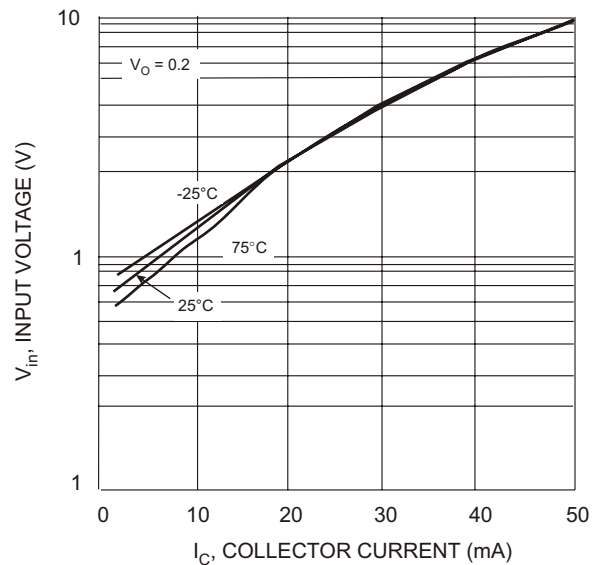


Fig. 6 Input Voltage vs. Collector Current