


AC Current transducer AK-C-

$$I_{PN} = 10 \dots 200 \text{ A}$$

Transducer for the electronic measurement of AC sinusoidal waveforms, with galvanic isolation between the primary (High power) and the secondary circuits (Electronic circuit). Jumper selectable ranges and self powered transducers.



Electrical data

Primary Nominal Current	Analogue Output Signal ¹⁾	Type	RoHS Date code
I_{PN} (A.t.RMS)	V_{OUT} (V DC)		
10,20,50	5	AK 50 C5	planned
10,20,50	10	AK 50 C10	MAY 2006
100,150,200	5	AK 200 C5	planned
100,150,200	10	AK 200 C10	JUNE 2006

V_C	Supply voltage	Self Powered	
R_L	Load resistance	1	MΩ
V_b	Rated voltage (CAT III, PD2)	150	V AC
V_d	RMS Isolation voltage test, 50 Hz, 1mn	3	kV AC
f	Frequency bandwidth	50-60	Hz

Accuracy - Dynamic performance data

X	Accuracy @ I_{PN} , $T_A=25^\circ\text{C}$	± 1	%
t_r	Response time @ 90% of I_{PN}	< 100	mS

General data

T_A	Ambient operating temperature (0-95% RH)	- 20 ... + 50	°C
T_S	Ambient storage temperature	- 20 ... + 85	°C
m	Mass	120	g
	Safety	IEC 61010-1	
	EMC	EN 61326	

Note : ¹⁾ For 0-5 V output model, no saturation output up to 8.2 V and for 0-10 V output model, no saturation output up to 15 V.

Features

- AC sinusoidal measurement
- Average responding
- Self powered transducers
- Panel mounting
- Voltage output
- Jumper selectable ranges

Advantages

- Large aperture
- High isolation between primary and secondary circuits
- Easy to mount


Applications

- Automation systems
Analog current reading for remote monitoring (e.g. motor).
- Data loggers
Self-powered transducer does not drain data logger batteries.
- Panel meters
Simple connection displays power consumption.

Options on request

- DIN mounting

Dimensions AK-C- (unit : mm, 1mm = 0.0394 inch)

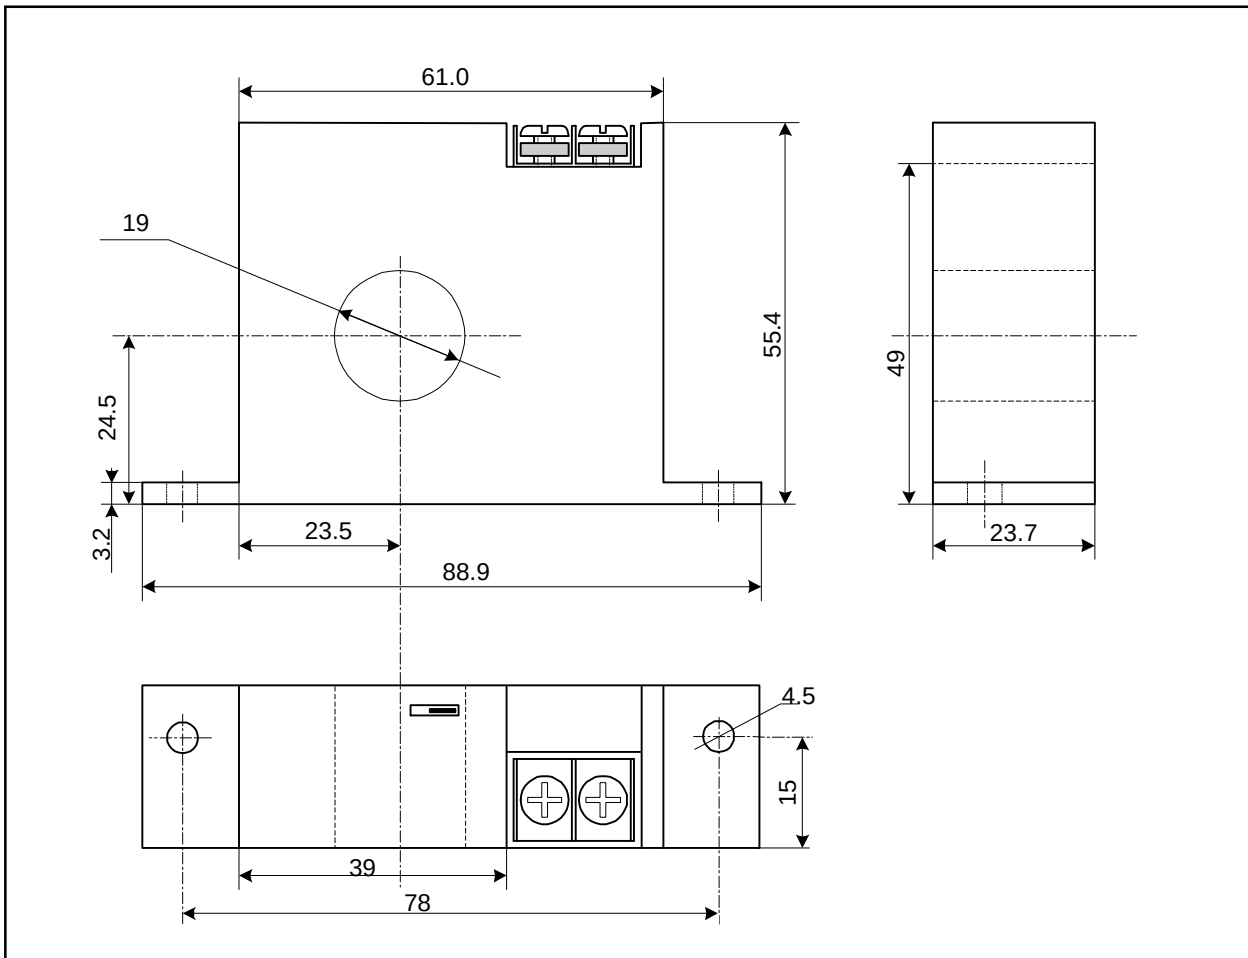

Mechanical characteristics

- General tolerance ± 1 mm
- Primary aperture 19 mm
- Panel mounting 2 holes $\varnothing 4.5$ mm
- Distance between holes 78 mm

Remark

- Temperature of the primary conductor should not exceed 60°C.

Connections

- 2 x UNC8 Cylindric Head

