

**RF Driver Amplifier  
250 - 4000 MHz**

**MAAMSS0056  
V1**

**Features**

- Broadband Operation
- Output Intercept Point Greater than +40 dBm
- Excellent ACPR performance
- High Efficiency
- Lead-Free SOIC-8EP Package
- 100% Matte Tin Plating over Copper
- Halogen-Free "Green" Mold Compound
- RoHS\* Compliant and 260°C Reflow Compatible

**Description**

M/A-COM's MAAMSS0056 RF driver amplifier is a two stage GaAs MMIC which exhibits exceptional linearity performance as well as featuring high gain in a lead-free SOIC-8EP surface mount plastic package. The device runs off a single +5 volt supply and draws 190 mA typically.

The MAAMSS0056 is fabricated using a high reliability GaAs HBT process to realize low current and high power functionality. The process features full passivation for increased performance and reliability.

The MAAMSS0056 has been designed to be a functional driver amplifier from 250 to 4000 MHz.

**Ordering Information <sup>1</sup>**

Part Number	Package
MAAMSS0056	Bulk Packaging
MAAMSS0056TR-3000	3000 piece reel
MAAMSS0056SMB	2140 MHz Configuration
MAAM-000056-000SMB	Sample Only, General Frequency

1. Reference Application Note M513 for reel size information.


**Absolute Maximum Ratings <sup>2,3</sup>**

Parameter	Absolute Maximum
RF Output Power	29 dBm
Voltage	6 volts
Storage Temperature	-65°C to +150°C
Junction Temperature	200°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

**Functional Block Diagram**

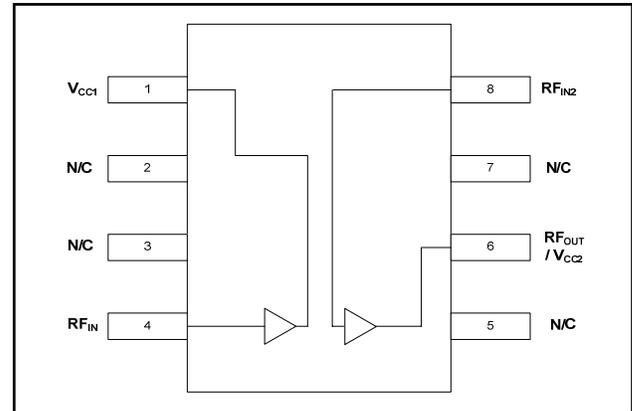

**Pin Configuration <sup>4</sup>**

Pin No.	Pin Name	Description
1	V <sub>CC1</sub>	1st Stage V <sub>CC</sub> & RF Output
2	N/C	No Connection
3	N/C	No Connection
4	RF <sub>IN</sub>	Amplifier Input
5	N/C	No Connection
6	RF <sub>OUT</sub> / V <sub>CC2</sub>	Amplifier Output & 2nd Stage V <sub>CC</sub>
7	N/C	No Connection
8	RF <sub>IN2</sub>	2nd Stage RF Input

4. The exposed pad centered on the package bottom must be connected to the RF and DC ground.

**Maximum Operating Conditions <sup>5</sup>**

Parameter	Maximum Operating Conditions
Junction Temperature <sup>6</sup>	160°C
RF Output Power	28.5 dBm
Operating Temperature	-40°C to +85°C

5. Operating at or within these conditions will ensure MTTF > 1 x 10<sup>6</sup> hours.

6. Typical thermal resistance (θ<sub>jc</sub>) = 65°C/W.


**RF Driver Amplifier  
250 - 4000 MHz**

**MAAMSS0056  
V1**

**Electrical Specifications:  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50 \Omega$ ,  $V_{CC} = 5\text{V}$**

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Gain	2140 MHz	dB	20	22	—
Input Return Loss	2140 MHz	dB	—	10	—
Output Return Loss	2140 MHz	dB	—	10	—
Output P1dB	2140 MHz	dBm	—	27.5	—
Output IP3	(+13 dBm / tone, 1 MHz spacing) 2140 MHz	dBm	—	42	—
Channel Power	(@ -45 dBc ACPR, WCDMA 64 channels fwd) 2140 MHz	dBm	—	22	—
Noise Figure	2140 MHz	dB	—	3.5	—
Quiescent Current	+5V	mA	—	190	—
Current @ 13 dBm Output	(+13 dBm / tone, 1 MHz spacing) 2140 MHz	mA	—	195	230

**Lead-Free SOIC-8EP<sup>†</sup>**

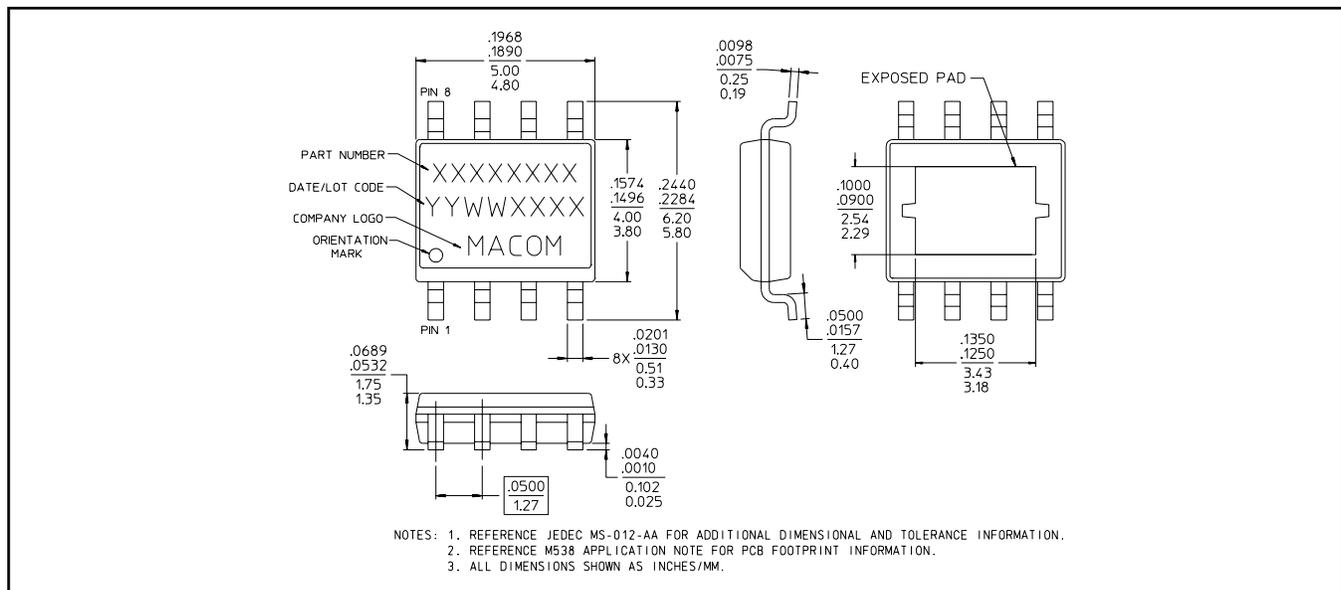


<sup>†</sup> Reference Application Note M538 for lead-free solder reflow recommendations.


**RF Driver Amplifier  
250 - 4000 MHz**

**MAAMSS0056  
V1**


**2140 MHz PCB Layout**

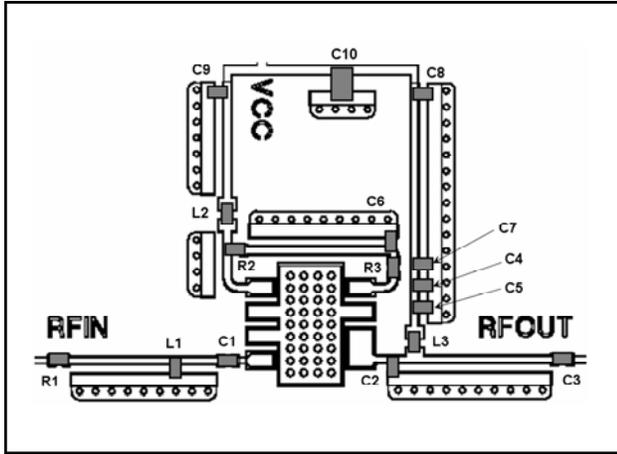


**2140 MHz Schematic**

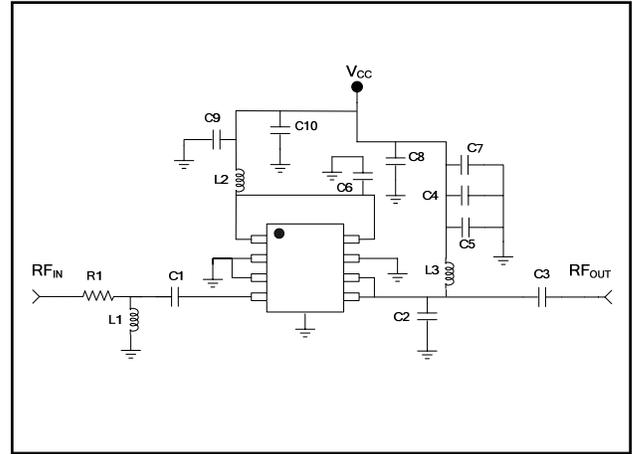


**2500 MHz PCB Layout**

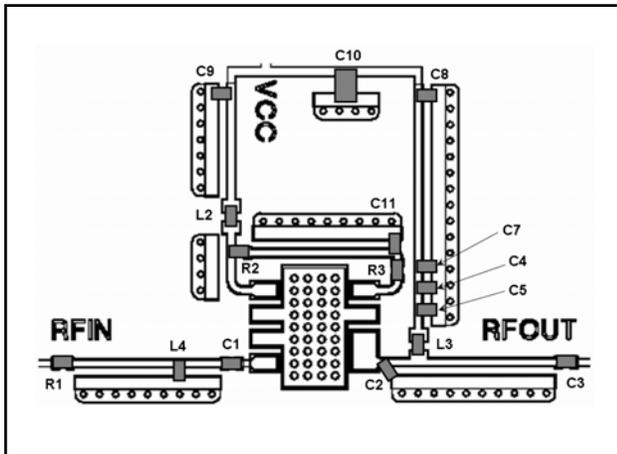


**2500 MHz Schematic**

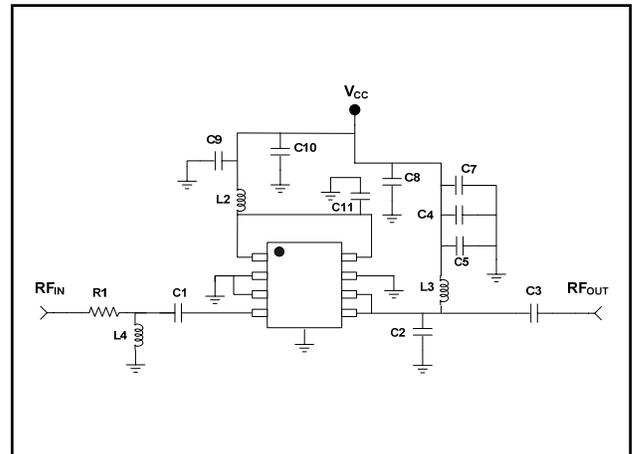

**3500 MHz PCB Layout**

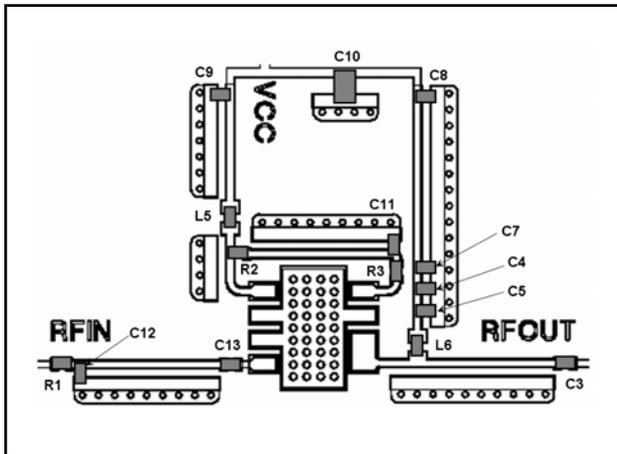


**3500 MHz Schematic**

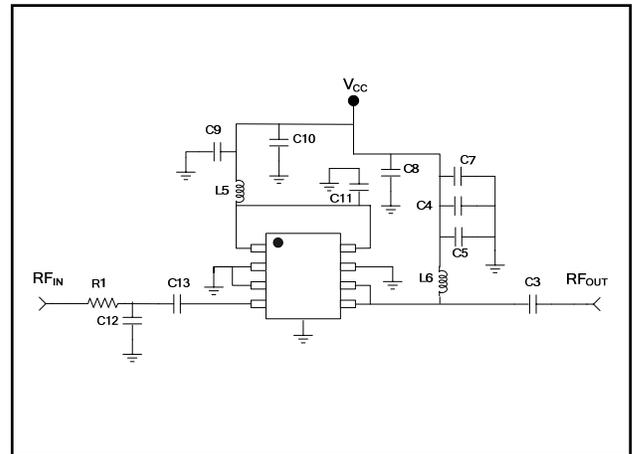

**Parts List**

Part	Value	Used on Freq. Band	Case Style	Manufacturer	Purpose
C1	1.8 pF	2140, 2500, 3500	0402	Murata	Input Tuning & DC Block
C2	1.2 pF	2140, 2500, 3500	0402	Murata	Inter-stage Tuning
C3	1000 pF	2140, 2500, 3500	0402	Murata	Output Tuning
C4	1000 pF	2140, 2500, 3500	0402	Murata	Bypass
C5	15 pF	2140, 2500, 3500	0402	Murata	Bypass
C6	1 pF	2140	0402	Murata	Inter-stage Tuning
C13	1 pF	3500	0402	Murata	Input Tuning & DC Block
C7, C8, C9	0.1 uF	2140, 2500, 3500	0402	Murata	Bypass
C10	3.3 uF	2140, 2500, 3500	0402	Murata	Bypass
C11	0.5 pF	2500, 3500	0402	Murata	Inter-stage Tuning
C12	0.5 pF	3500	0402	Murata	Input Tuning
L1	3.3 nH	2140	0402	Coilcraft	Input Tuning
L2, L3	7.5 nH	2140, 2500	0402	Coilcraft	Bias Injection
L4	4.7 nH	2500	0402	Coilcraft	Input Tuning
L5, L6	5.1 nH	3500	0403	Coilcraft	Bias Injection
R1, R2, R3	0 Ω	2140, 2500, 3500	0402	Panasonic	Jumper

**Cross Section View**

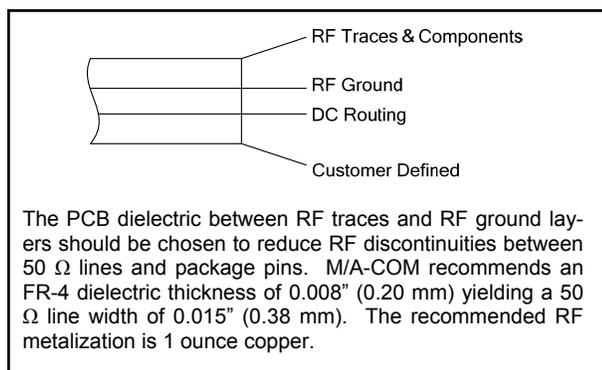

**Handling Procedures**


Please observe the following precautions to avoid damage:

**Static Sensitivity**


Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

**Typical Performance Curves, 2140 MHz Configuration**


**Gain**

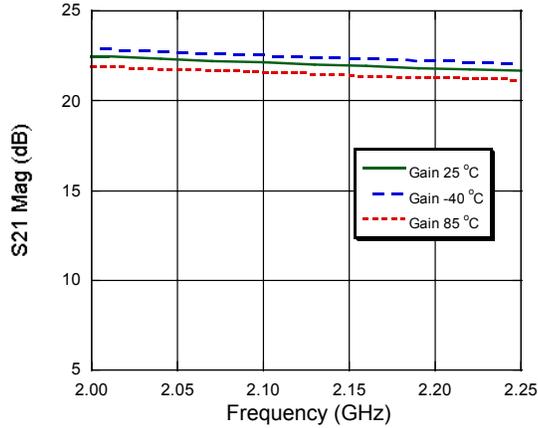


**Input Return Loss**

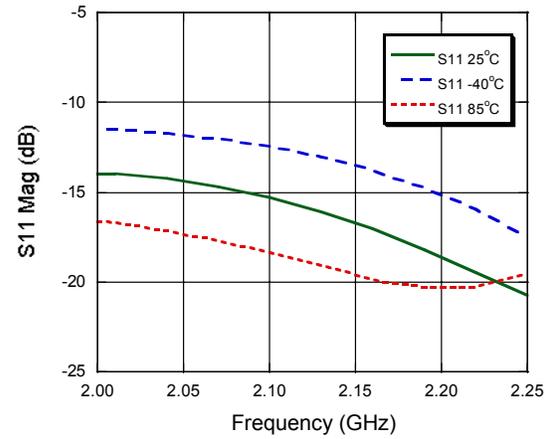


**Output Return Loss**

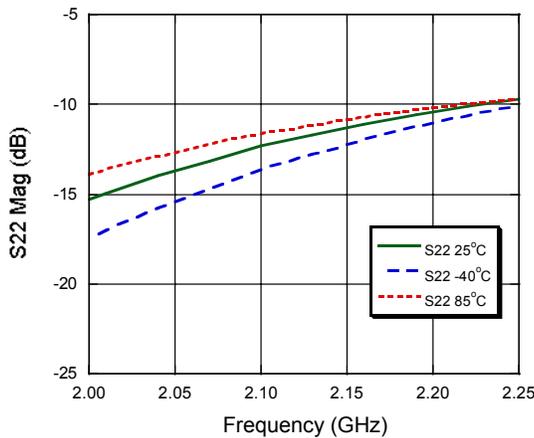


**Noise Figure**

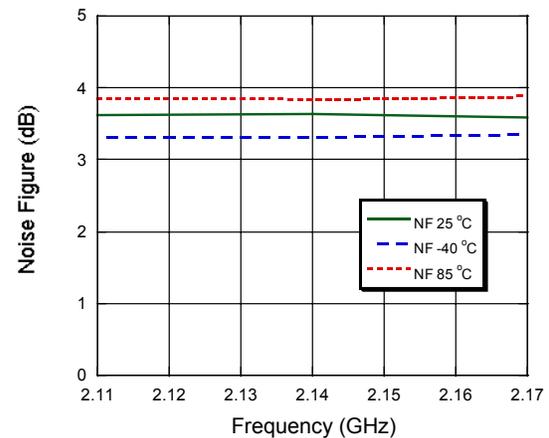

**P1dB**

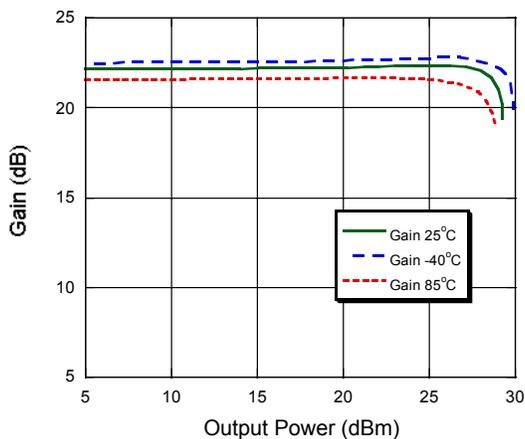


**Output IP3**

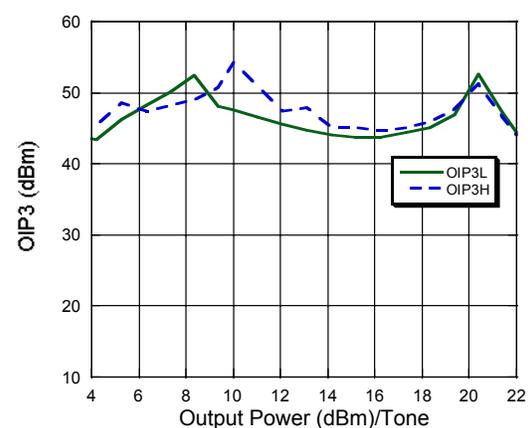


**Applications Section**

**Typical Performance Curves, 2500 MHz Configuration @ 25° C**


**Gain**

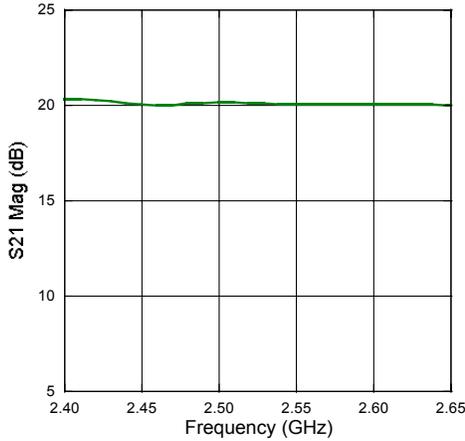


**Input Return Loss**

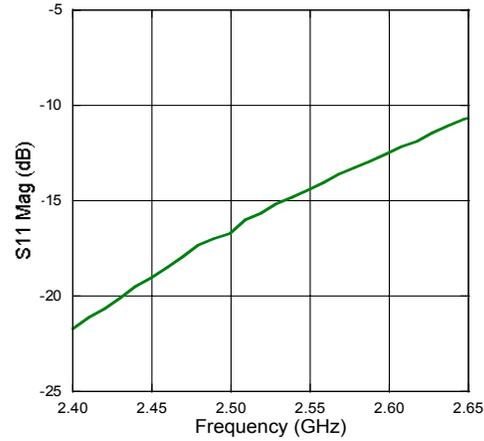


**Output Return Loss**

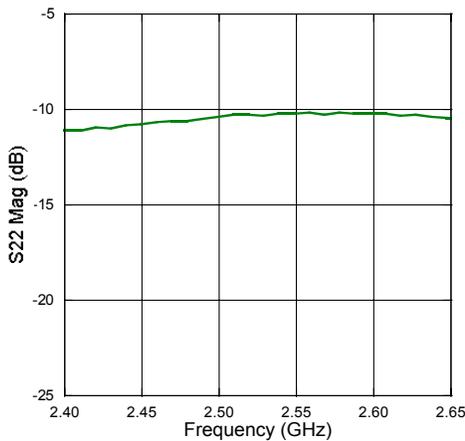


**EVM**

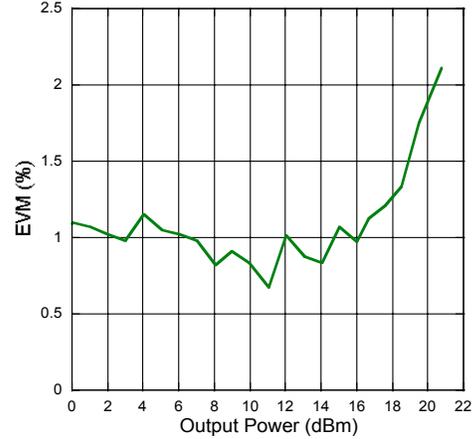

**P1dB**

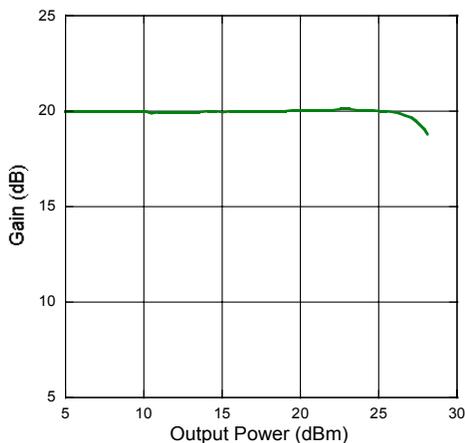


**Output IP3**

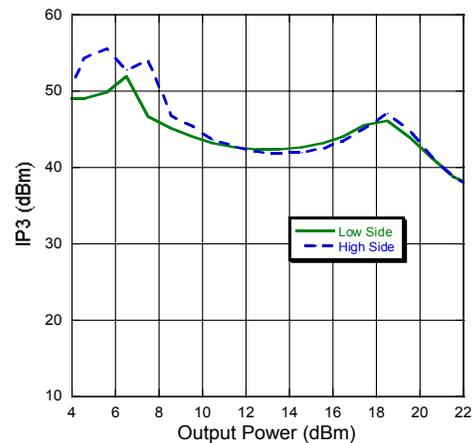


**Applications Section**

**Typical Performance Curves, 3500 MHz Configuration @ 25° C**


**Gain**

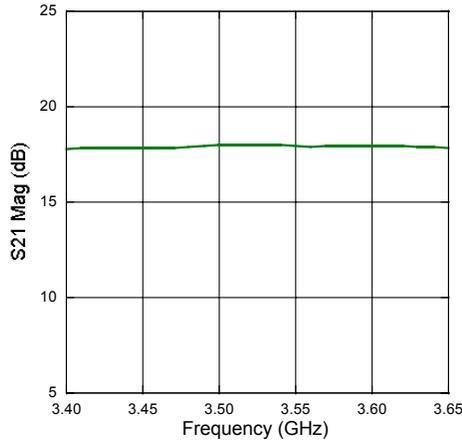


**Input Return Loss**

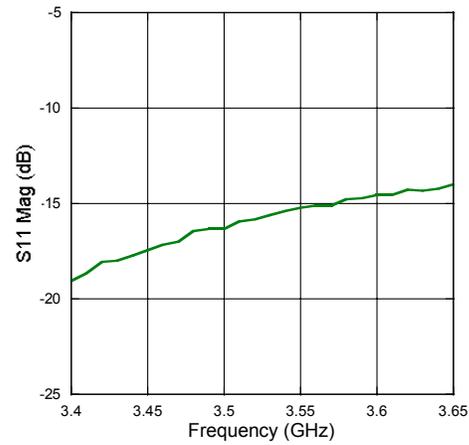

**Output Return Loss**

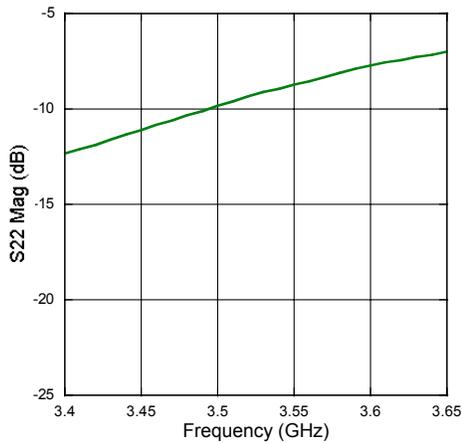

**Output IP3**

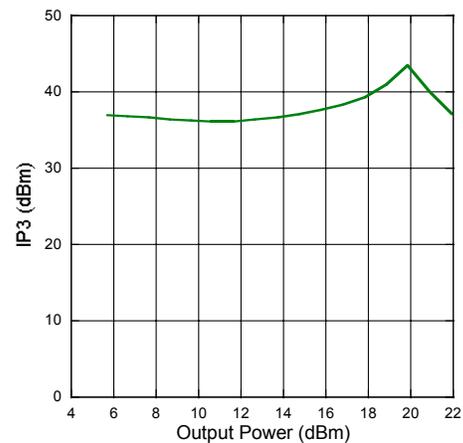

**P1dB**

