

**Silicon Doubled Balanced HMIC Mixer  
700 – 2500 MHz**

**MAMX-000950-1225MT  
V1**

**Features**


- SOT-25 Low Cost Miniature Plastic Package
- 7.0 dB Typical Conversion Loss
- +7 to +13 dBm LO Drive
- HMIC™ Patented Process
- Silicon Medium Barrier Schottky Diodes
- DC - 400 MHz IF Bandwidth
- Lead Free (RoHS Compliant) with 260 °C Reflow Capability
- 100% Matte Tin Plating

**Description and Applications**

M/A-COM's MAMX-000950-1225MT is a 700-1200 MHz silicon monolithic double balanced mixer in a low cost miniature surface mount SOT-25 package. The die uses M/A-COM's unique HMIC silicon/glass process to achieve low loss passive elements while retaining the advantages of medium barrier silicon Schottky barrier diodes.

These mixers are well suited for high volume wireless and cellular applications where small size and repeatability are required. Typical applications include frequency conversion, modulation, and demodulation in wireless receivers and transmitters.

**SOT-25 Package Outline  
(Topview)**

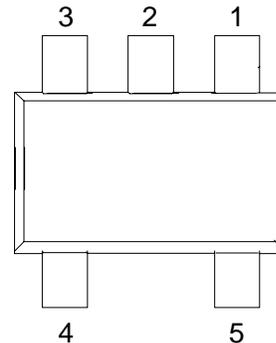

**PIN Configuration**


PIN	Function	PIN	Function
1	RF	4	GND
2	GND	5	IF
3	LO		

**Absolute Maximum Ratings<sup>1</sup>**

Parameter	Maximum Ratings
Operating Temperature	-65 °C to +125 °C
Storage Temperature	-65 °C to +150 °C
Incident LO Power	+20 dBm
Incident RF Power	+20 dBm
Soldering Temperature	+260 °C max.

1. Exceeding these limits may cause permanent damage.  
\* Please refer to application note M538 for surface mounting instructions.

**Schematic**

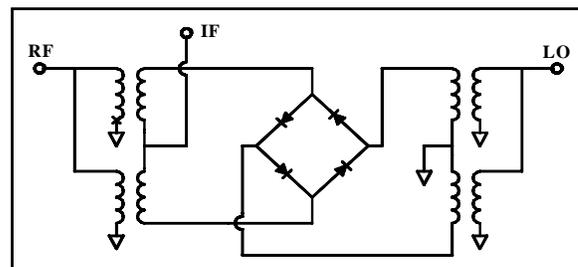

**Electrical Specifications @ +25 °C**


Parameter	Frequency	Test Conditions	Units	Min.	Typ.	Max.
Conversion Loss	850 MHz 0.7-1.2 GHz	LO Drive = +10 dBm RF = -10 dBm, IF = 60 MHz	DB		7.0 8.1	8.0 10.5
L - R Isolation	850 MHz 0.7-1.2 GHz	LO Drive = +10 dBm RF Level = -10 dBm	DB		26.0 20.5	
L - I Isolation	850 MHz 0.7-1.2 GHz	LO Drive = +10 dBm RF Level = -10 dBm	DB		26.5 27.0	
R - I Isolation	850 MHz 0.7-1.2 GHz	LO Drive = +10 dBm RF Level = -10 dBm	DB		27.5 24.0	
LO VSWR	850 MHz 0.7-1.2 GHz	LO Drive = +10 dBm RF Level = -10 dBm			1.8:1 1.8:1	- -
RF VSWR	850 MHz 0.7-1.2 GHz	LO Drive = +10 dBm RF Level = -10 dBm			1.6:1 2.5:1	- -
IF VSWR	DC - 400 MHz	LO Drive = +10 dBm RF Level = -10 dBm			1.05:1	-
Input IP3	850 MHz 0.7-1.2 GHz	LO Drive = +10 dBm RF = -5 dBm, IF = 60 MHz	dBm	18.5 13.0	20.5 18.0	
Input 1 dB Compression	850 MHz 0.7-1.2 GHz	LO Drive = +10 dBm IF = 60 MHz	dBm		4.3 5.6	
IF 1 dB Bandwidth	DC - 400 MHz	LO = 850 MHz @ +5dBm	MHz	0		400.0

**Silicon Doubled Balanced HMIC Mixer  
700 – 2500 MHz**


**MAMX-000950-1225MT  
V1**

**Typical Performance Curves (LO Drive = +10 dBm, RF = -10 dBm, IF = 60 MHz)**


**Conversion Loss**

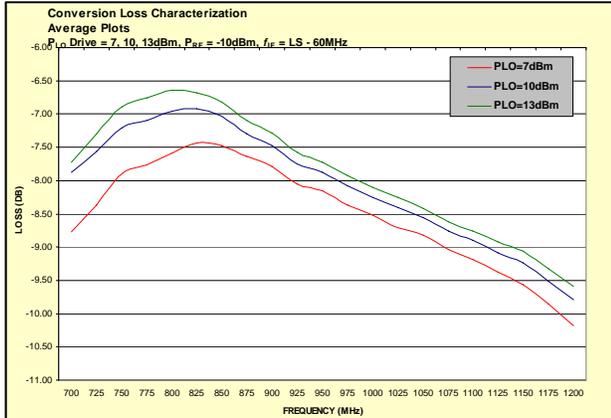


**Isolation**

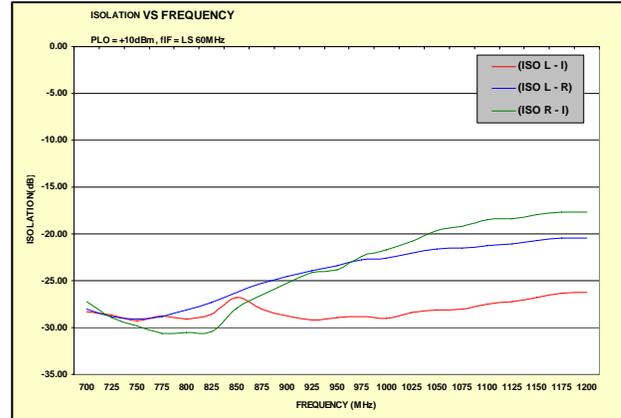

**RF and IF VSWR**

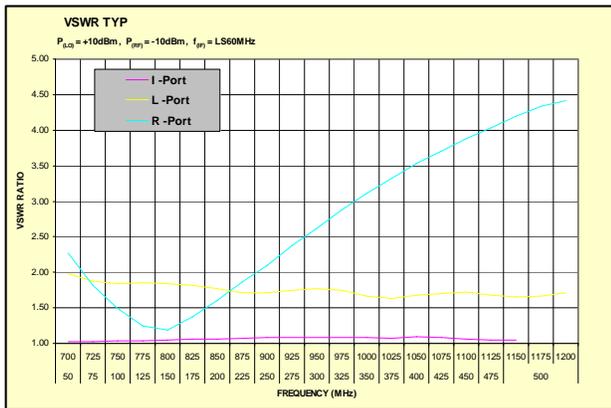


**Third Order Intercept and Input 1 dB Compression Power**

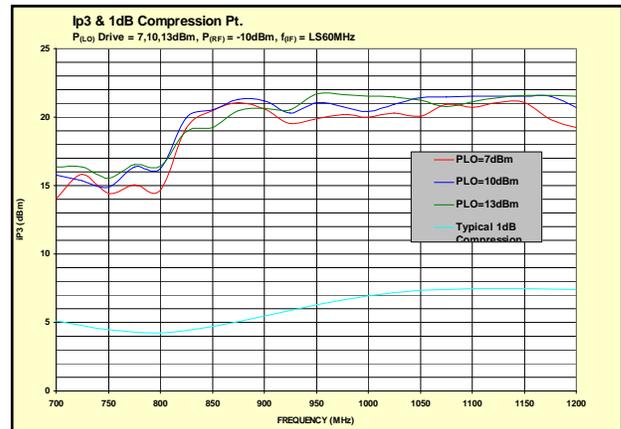

**Silicon Doubled Balanced HMIC Mixer  
700 – 2500 MHz**

**MAMX-000950-1225MT  
V1**

**Case Style - SOT-25**

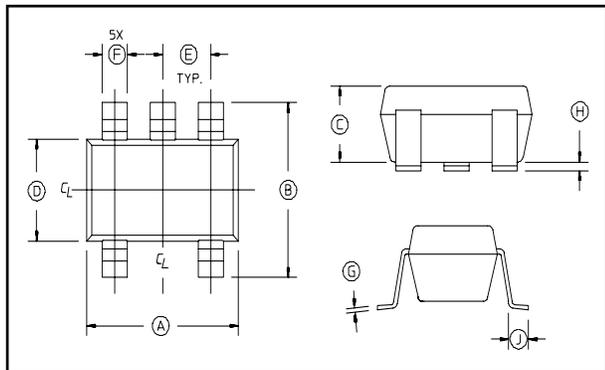

**SOT-25 Dimensions**

Dim	Inches		Millimeters	
	Min.	Max.	Min.	Max.
A	.1103	.1181	2.80	3.10
B	.1023	.1181	2.6	3.00
C	0.0355	.0512	0.9	1.30
D	0.0591	.0669	1.5	1.70
E	.0374 REF.		0.95 REF.	
F	.0138	.0197	.35	.50
G	.0031	0.0079	.08	0.2
H	.0002	.0059	.05	.15
J	.0138	.0216	.35	.55

1. Dimensions do not include mold fls, protrusion or gate burrs which shall not exceed 0.0098 in (.25mm) per side.
2. Leads Coplanarity should be 0.003 (0.08) max.

**Ordering Information**

Part Number	Package
MAMX-000950-1225MT	Tape and Reel