

EPE6358S




- Complies with or exceeds IEEE 802.3, 10Base-T Standards
- Robust design allows for toughest soldering processes
- 1500 Vrms Isolation


Electrical Parameters @ 25° C

OCL (μ H Min.) Pins 16-15 & 11-10		Interwinding Capacitance (pF Max.)	Primary Leakage Inductance (μ H Max.)		Return Loss (dB Min.)	Primary DCR (Ω Max.)	
@ 100 KHz, 0.1 Vrms			@ 100 KHz, 0.1 Vrms				
Xmit	Rcv		Xmit	Rcv			
200	200	12	0.3	0.3	-15	0.35	0.35

Schematic

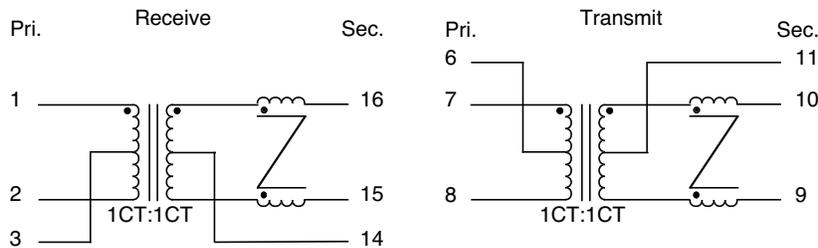

Package

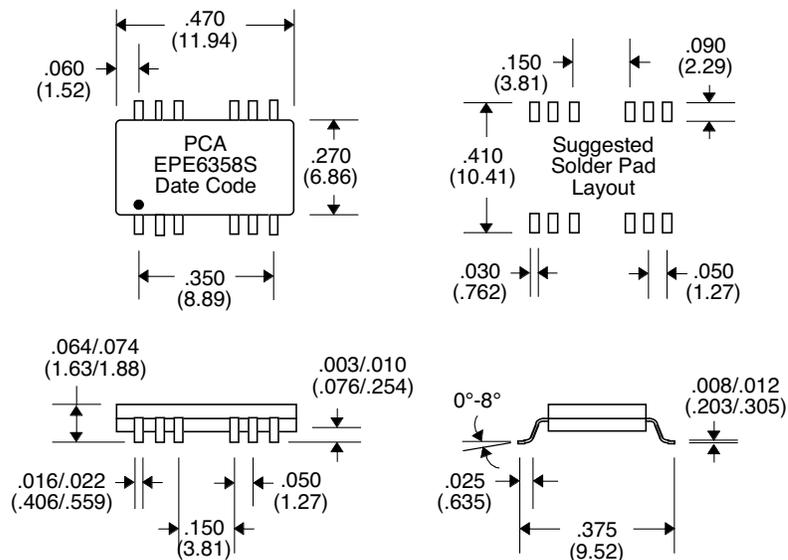

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$