



PRELIMINARY

SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638  
 Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

## Designer's Data Sheet


### FEATURES:

- Rugged construction with polysilicon gate
- Low RDS(on) and high transconductance
- Excellent high temperature stability
- Very fast switching speed
- Fast recovery and superior dv/dt performance
- Increased reverse energy capability
- Low input and transfer capacitance for easy paralleling
- Ceramic Seals for improved hermeticity
- Hermetically sealed surface mount package
- TX, TXV and Space Level screening available
- Replaces: IRF240 Types

# SFF240

**18 AMP  
 200 VOLTS  
 0.18Ω  
 N-CHANNEL  
 POWER MOSFET**

### MILPACK

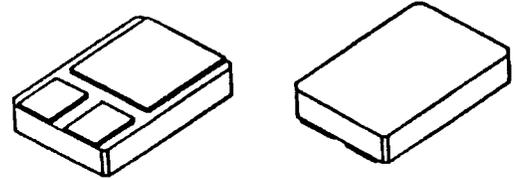


### MAXIMUM RATINGS

CHARACTERISTIC	SYMBOL	VALUE	UNIT
Drain to Source Voltage	V <sub>DS</sub>	200	Volts
Gate to Source Voltage	V <sub>GS</sub>	±20	Volts
Continuous Drain Current	I <sub>D</sub>	18	Amps
Operating and Storage Temperature	T <sub>op</sub> & T <sub>stg</sub>	-55 to +150	°C
Thermal Resistance, Junction to Case	R <sub>θJC</sub>	1.7	°C/W
Total Device Dissipation @ TC=25°C Total Device Dissipation @ TC=55°C	P <sub>D</sub>	74 56	Watts

### PACKAGE OUTLINE: MILPACK

**PIN OUT:**  
 PIN 1: DRAIN  
 PIN 2: SOURCE  
 PIN 3: GATE

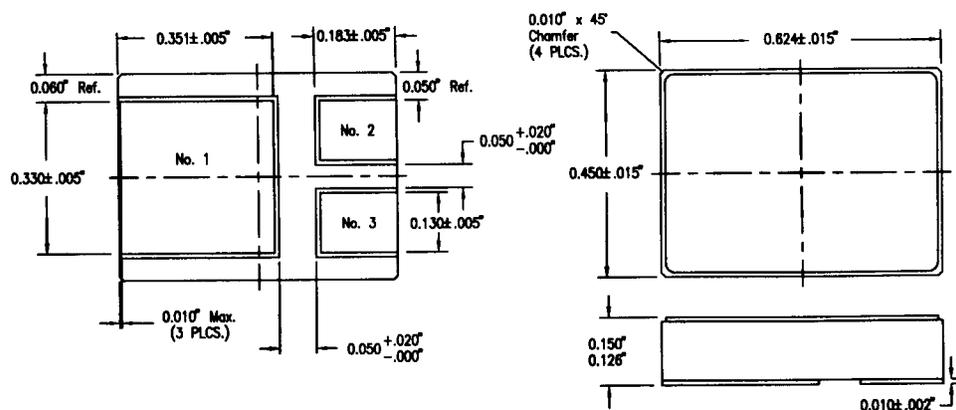

**NOTE:** All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

**DATA SHEET #: F00109 B**

**MED**

# SFF240

## SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638  
 Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

### ELECTRICAL CHARACTERISTICS @ $T_J=25^\circ\text{C}$ (Unless Otherwise Specified)

RATING	SYMBOL	MIN	TYP	MAX	UNIT
Drain to Source Breakdown Voltage (VGS=0 V, ID=250 $\mu$ A)	BV <sub>DSS</sub>	200	---	---	V
Drain to Source on State Resistance (VGS=10 V, ID= 10 A)	R <sub>DS(on)</sub>	---	0.13	0.18	$\Omega$
On State Drain Current (VDS > ID(on) X R <sub>DS(on)</sub> Max, VGS=10 V)	ID(on)	18	---	---	A
Gate Threshold Voltage (VDS=VGS, ID=250 $\mu$ A)	VGS(th)	2.0	---	4.0	V
Forward Transconductance (VDS $\geq$ 10 V, IDS= 10 A)	g <sub>fs</sub>	6.5	10	---	S(V)
Zero Gate Voltage Drain Current (VDS=max rated voltage, VGS=0 V) (VDS=80% rated VDS, VGS=0 V, TA=125 $^\circ$ C)	IDSS	---	---	250 1000	$\mu$ A
Gate to Source Leakage Forward Gate to Source Leakage Reverse	At rated VGS IGSS	---	---	100 -100	nA
Total Gate Charge Gate to Source Charge Gate to Drain Charge	VGS=10 Volts 80% rated VDS Rated ID Qg Qgs Qgd	---	40 7 21	60 10 32	nC
Turn on Delay Time Rise Time Turn Off Delay Time Fall Time	VDD=50% rated VDS rated ID RG= 9.1 $\Omega$ RD= 5.6 $\Omega$ td(on) tr td(off) tf	---	14 52 45 36	21 77 68 54	nsec
Diode Forward Voltage (IS=rated ID, VGS=0 V, TJ=25 $^\circ$ C)	VSD	---	---	2.0	V
Diode Reverse Recovery Time Reverse Recovery Charge	TJ=25 $^\circ$ C IF=rated ID di/dt=100 A/ $\mu$ sec trr QRR	120 1.3	250 2.6	530 5.6	nsec $\mu$ C
Input Capacitance Output Capacitance Reverse Transfer Capacitance	VGS=0 Volts VDS=25 Volts f= 1 MHz Ciss Coss Crss	---	1300 380 93	---	pF

SAFE OPERATING AREA (S.O.A.)  
 TC = 25 $^\circ$ C, D.C. CONDITION

