



SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

PRELIMINARY

**SSR1045M
SSR1045Z**


Designer's Data Sheet

FEATURES:


- Low Reverse Leakage
- Low Forward Voltage Drop
- Guard Ring for Overvoltage protection
- Isolated Hermetically Sealed Power Package
- Ceramic Seals for Improved Hermeticity
- Custom Lead Forming Available
- Eutectic Die Attach
- 175°C Operating Temperature
- TX, TXV and Space Level Screening Available

**10 AMP
45 VOLTS
SCHOTTKY
RECTIFIER**

TO-254



TO-254Z



MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage	VRRM VRWM VR	45	Volts
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	IO	10	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave Superimposed on IO, allow junction to reach equilibrium between pulses, TA=25°C)	IFSM	150	Amps
Operating and storage temperature	Top & Tstg	-65 to +175	°C
Maximum Thermal Resistance Junction to Case	RθJC	1.5	°C/W

Available with Glass or Ceramic Seals. Contact Factory for Details.

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET#: RS0135 B

MED

SSR1045M SSR1045Z

PRELIMINARY

SSDI

SOLID STATE DEVICES, INC


14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop (IF = 5 Adc, TA=25°C, 300µs Pulse) (IF = 10 Adc, TA=25°C, 300µs Pulse)	VF1	0.53 0.64	Vdc
Instantaneous Forward Voltage Drop (IF = 5 Adc, TA= - 55°C, 300µs Pulse)	VF2	0.59	Vdc
Reverse Leakage Current (Rated VR, TA=25°C, 300µs pulse minimum)	IR1	100	µA
Reverse Leakage Current (Rated VR, TA=100°C, 300µs pulse minimum)	IR2	10	mA
Junction Capacitance (VR = 10 Vdc, TA=25°C, f= 1 MHz)	CJ	400	pf


CASE OUTLINE: TO-254

PIN OUT:
PIN 1: CATHODE
PIN 2: ANODE
PIN 3: ANODE

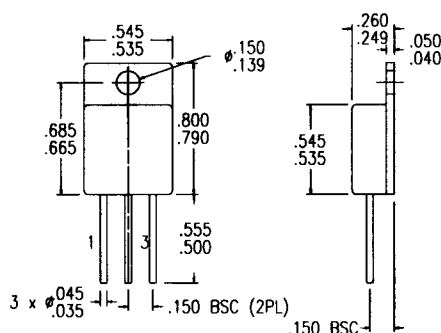

CASE OUTLINE: TO-254Z

PIN OUT:
PIN 1: CATHODE
PIN 2: ANODE
PIN 3: ANODE

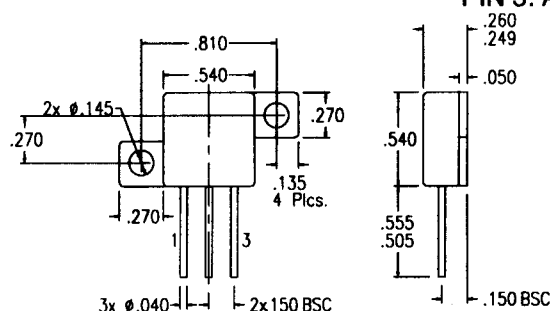

TYPICAL OPERATING CURVES

(TA=25°C Unless otherwise specified)

