

SSW-115-02-T-Q-RA

SSQ-130-02-S-S

SSW-130-02-G-D-RA

SSW-122-03-S-T


LEAD STYLE	PLATING OPTION	ROW OPTION	TAIL OPTION	OTHER OPTION
<p>-G = 20µ" (0,51µm) Gold on contact Gold flash on tail</p> <p>-T = 200µ" (5,08µm) Tin on contact and tail (Tin N/A on LIF contacts)</p> <p>-S = 30µ" (0,76µm) Gold on contact 200µ" (5,08µm) Tin tail</p>		<p>-S = Single Row</p> <p>-D = Double Row</p> <p>-T = Triple Row</p> <p>-Q = Double Row .200" (5,08mm) row space (Outer rows filled only)</p>	<p>-RA = Right Angle (Leave blank for straight pin version)</p> <p>-VS = Vertical Surface Mount</p>	<p>"XXX" = Polarized (Specify "xxx" as position number)</p> <p>-LL = Locking Lead</p> <p>Two leads per strip crimped in opposite directions on or near centerline. Available on tails from (2,29) .090" to (7,87) .310 only. N/A with single row 1 or 2 positions.</p>

Surface Mount!


Straight Pin Versions (Specify "LEAD STYLE" from chart)

LEAD STYLE	SINGLE DOUBLE OR TRIPLE	SINGLE DOUBLE OR TRIPLE	
		A	B
-01	-21	(2,54) .100	(11,05) .435
-02	-22	(4,83) .190	(13,34) .525
-03	-23	(9,91) .390	(18,42) .725
-04	-24	(14,73) .580	(23,24) .915
-06**	N/A	(3,00) .118	(11,50) .453

* LIF N/A with Tin Plating
** Style -06 N/A with SSQ

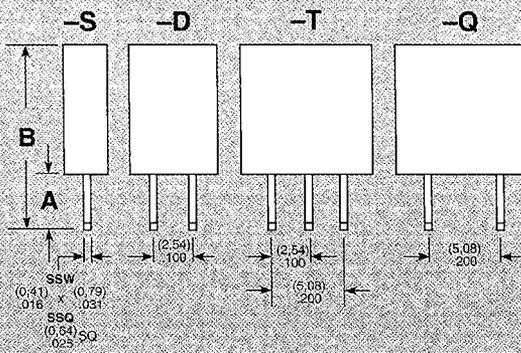

Surface Mount Versions (Requires SSW and "LEAD STYLE" -21 (-S & -D only))



Right Angle Versions (Specify "LEAD STYLE" from chart)

LEAD STYLE	SINGLE (-S & -P)	DOUBLE (-D)	TRIPLE (-T & -Q)	
				A
-02	-22	(2,54) .100	(2,54) .100	(2,54) .100
-03	-23	(7,62) .300	(7,62) .300	N/A
-04	-24	(12,45) .490	N/A	N/A

* LIF N/A with Tin Plating

