

Medium Voltage Inductive Coupling Units

MICU 300A

www.DataSheet4U.com

Features

- High current solution made with high permeability high performance nanocrystalline material avoids saturation problems at high currents.
- Low insertion losses $-4\text{dB} \pm 2\text{dB}$ (@2-40MHz range).
- More electrical safety: High insulation: 5 kV.
- Compact equipment: BNC connector integrated in the coupler (other connections available under request).



MICU 300A

Electrical parameters


Nominal current	300 A	
Rated Voltage		
Rated AC withstand voltage	Only depends on the insulation level of the cable	
Rated lightning withstand voltage (1.2/50s)		
Insulation resistance		
Partial discharge level at $1.2 U_N$	No discharges possible, coupler is completely at ground potential	
Transmission frequency range and attenuation	$-4\text{dB} \pm 2\text{dB}$ @2 to 40 MHz	
Nominal impedance	Coupling side	20 to 50
	Equipment side	50
Average power in permanence	> +40 dBmW	
Harmonic distortion and intermodulation	< -60 dB	
Dielectric strength	5 kV	
Working temperature	-20°C to 60°C	
Storage temperature	-40°C to 85°C	
Climatic category	25/100/21 according to IEC 60068-1	
Safety isolation	According to IEC 950	

Medium Voltage Inductive Coupling Units


MICU 300A

www.DataSheet4U.com

Installation

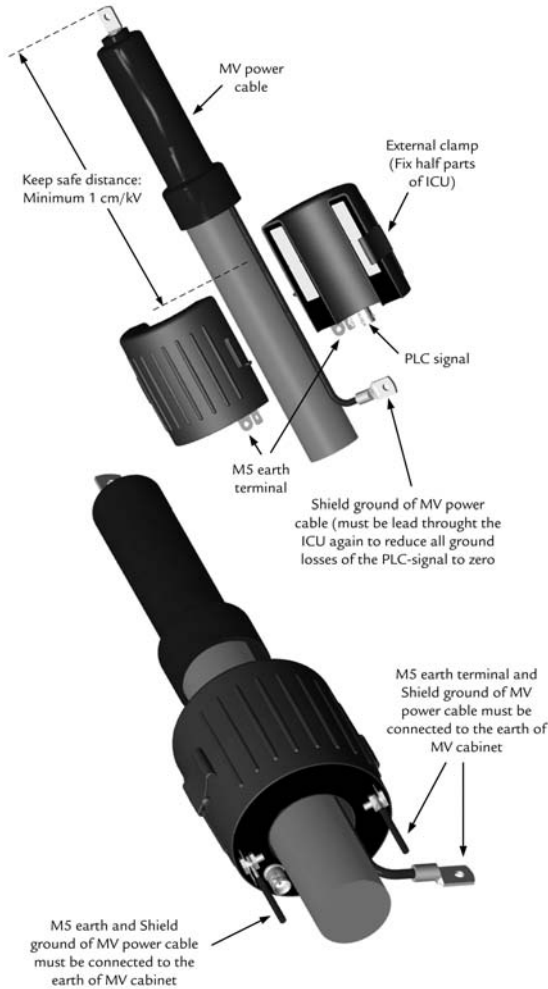

Dimensions

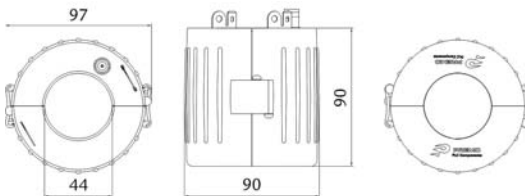

Dimensions in mm

Overall dimensions	Inner diameter	44 mm
	Height	90 mm
	Height (including ground connector)	< 115 mm
Connection to PLC-modem	Female BNC connector	
Connection to Earth	M5 screw	
Typical installation time	10 minutes	
Operate	www.DataSheet4U.com	