



Spec. No.	PS-ND-0711
Rev.	A

PRODUCT SPECIFICATION

Model No : CSS-1014B7/1015B7

Descriptions:

- 1.0 Inch Single Digit Display
- Emitting Color : Super Bright Blue



CUSTOMER APPROVED SIGNATURES	APPROVED BY	CHECKED BY	PREPARED BY
			陳新強

CHINA SEMICONDUCTOR CORPORATION
Address:2FL. NO.909,Chung-Cheng Road,
Chung-Ho City Taipei Hsien,Taiwan.

Tel:886-2-2223-9696
Fax:886-2-2223-9377

OPTO PLUS TECHNOLOGIES CO.,LTD
Address:696 Shun jiang Rd.,Ji Shan St.Shaoxing,
ZheJiang,China




Tel:86-0575-8623888
Fax:86-0575-8623112


Model No : CSS-1014B7/1015B7
Features -


1. 1.0 inch (25.4mm) digit height.
2. Case mold type.
3. RoHs compliant.
4. Low power consumption.
5. ESD>1KV(HBM)
6. Easy mounting on P.C. board or socket.

Device Selection Guide -

Part No.	Chip		Description
	Material	Emitted Color	
CSS-1014B7	InGaN	Super Bright Blue	Common Anode
CSS-1015B7	InGaN	Super Bright Blue	Common Cathode

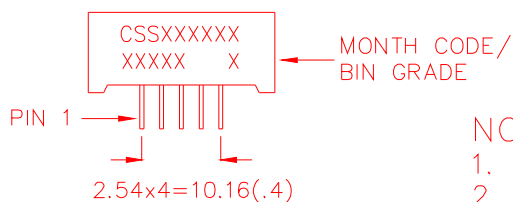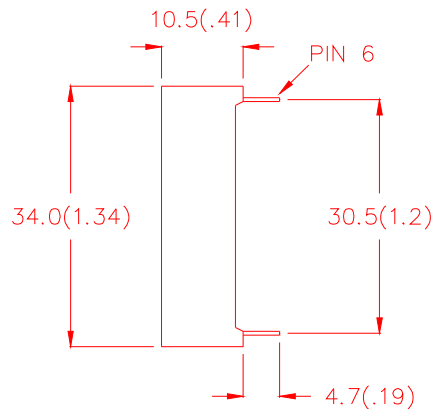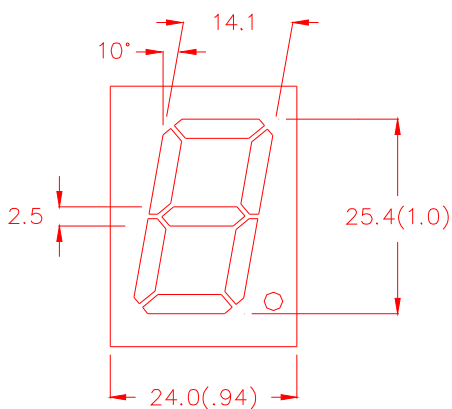Mechanical Dimensions -

NOTE:

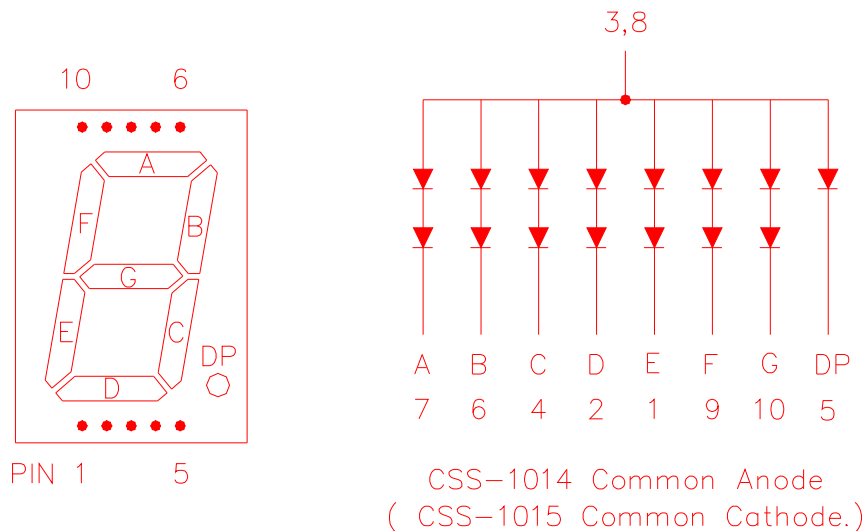1. All pins are $\varnothing 0.5(.02)$.
2. Dimension in millimeter (inch), and tolerance is $\pm 0.25 (.01)$ unless otherwise noted.


Model No : CSS-1014B7/1015B7
Internal Circuit Diagrams -

Absolute Maximum Rating -

(Ta=25°C)

Parameter	Symbol	Rating	Unit
Power Dissipation Per Dice	Pd	120	mW
Continuous Forward Current Per Dice	IAF	30	mA
Peak Current Per Dice	IPF	100	mA
Reverse Voltage Per Dice	VR	5	V
Operating Temperature	Topr	-25 ~ +85	°C
Storage Temperature	Tstg	-25 ~ +85	°C
Solder temperature 1/16 inch below seating plane for 3 seconds at 260 °C			


Model No : CSS-1014B7/1015B7
■ Electro-optical Characteristics -

(Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward Voltage Per Segment (DP)	VF	-	7.0(3.5)	8.0(4.0)	V	IF=20mA
Luminous Intensity Per Segment	Iv	-	30	-	mcd	
Dominant Wavelength	λ_d	-	470	-	nm	
Spectrum Radiation Bandwidth	$\Delta \lambda$	-	30	-	nm	
Reverse Current	IR	-	-	100	μA	VR=10V



Model No : CSS-1014B7/1015B7
Typical Electrical / Optical Characteristics Curves -
(Ta = 25°C Unless Otherwise Noted)


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

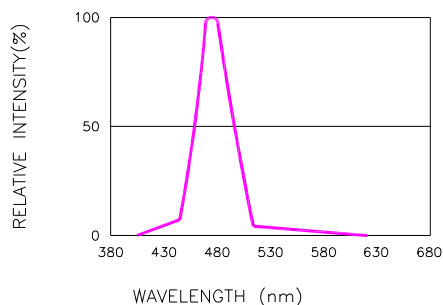
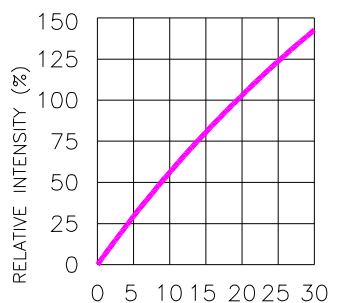
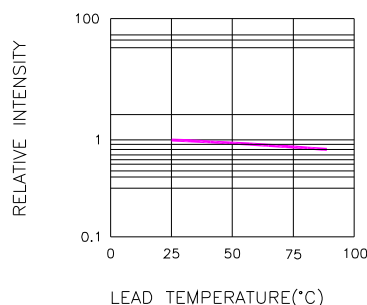
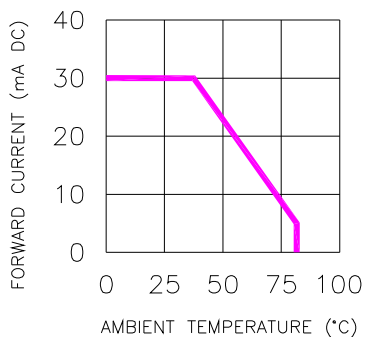
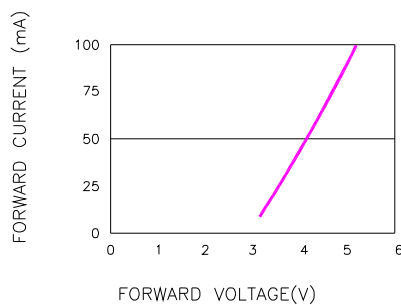
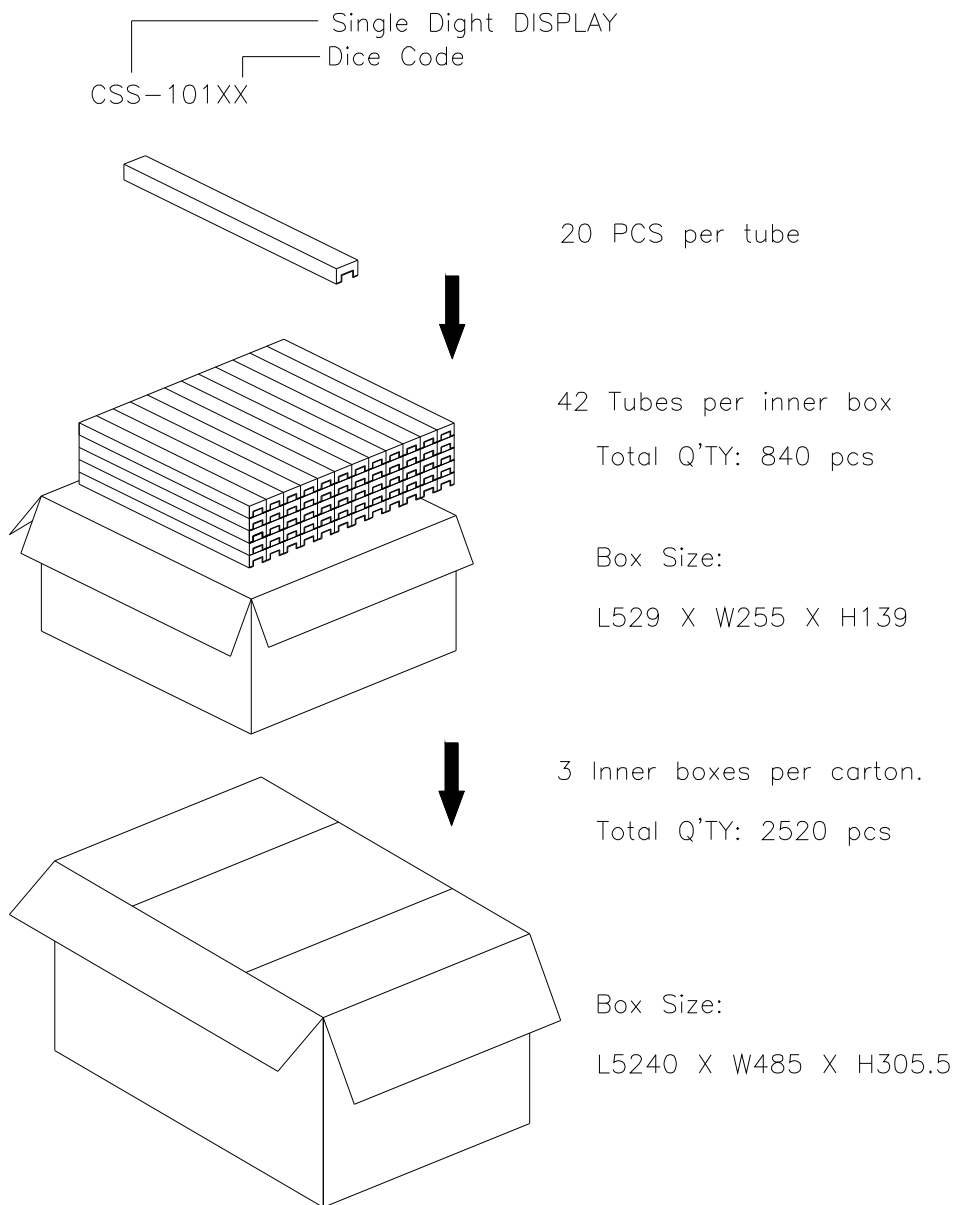


Fig.2 RELATIVE INTENSITY VS. WAVELENGTH


 Fig.3 RELATIVE INTENSITY
VS. FORWARD CURRENT

 Fig.4 RELATIVE INTENSITY VS. LEAD TEMPERATURE
(PULSED 20 mA; 300us
PULSE, 10ms PERIOD)

 Fig.5 FORWARD CURRENT
VS. AMBIENT TEMPERATURE

 Fig.6 PEAK FORWARD VOLTAGE
VS. FORWARD(100us TEST PULSE,
1% DUTY CYCLE)



Spec. No.	PS-ND-0711
Rev.	A

Model No : CSS-1014B7/1015B7**■ Package Dimensions**

Note: The specifications are subject to change without notice. Please contact us for updated information
<http://www.csctw.com.tw>

