



<b>Spec. No.</b>	PS-ND-0712
<b>Rev.</b>	A

# PRODUCT SPECIFICATION

**Model No : CSS-2310V9/CSS-2311V9**

## Descriptions:

- 2.3 Inch Single Digit Alphanumeric Display
- Emitting Color: Super-Bright Orange



CUSTOMER APPROVED	APPROVED BY	CHECKED BY	PREPARED BY
SIGNATURES			

**CHINA SEMICONDUCTOR CORPORATION**

Address:2FL. NO.909,Chung-Cheng Road,  
Chung-Ho City Taipei Hsien,Taiwan.

Tel:886-2-2223-9696

Fax:886-2-2223-9377

**OPTO PLUS TECHNOLOGIES CO.,LTD**

Address:696 Shun jiang Rd.,Ji Shan St.Shaoxing,  
ZheJiang,China

Tel:86-0575-8623888

Fax:86-0575-8623112

<http://www.csctw.com.tw>



Spec. No.	PS-ND-0712
Rev.	A

**Model No : CSS-2310V9/2311V9**


**Features -**

1. 2.24 inch (56.8 mm) digit height.
2. Case mold type.
3. RoHs compliant.
4. Low power consumption.
5. Easy mounting on P.C. board or socket.

**Device Selection Guide -**

Part No.	Chip		Description
	Material	Emitted Color	
CSS-2310V9	AlGaInP	Super-Bright Orange	Common Anode
CSS-2311V9			Common Cathode

**Package Dimensions -**

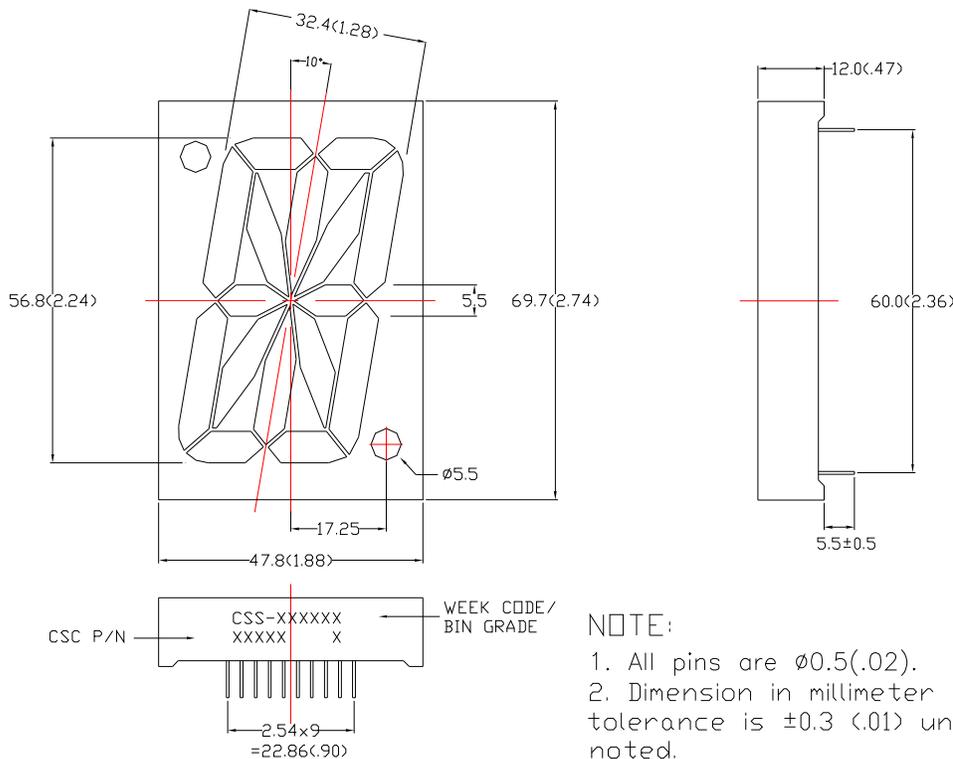

**NOTE:**


1. All pins are  $\phi 0.5$  (.02).
2. Dimension in millimeter (inch), and tolerance is  $\pm 0.3$  (.01) unless otherwise noted.



Spec. No.	PS-ND-0712
Rev.	A

**Model No : CSS-2310V9/2311V9**

**Internal Circuit Diagrams -**

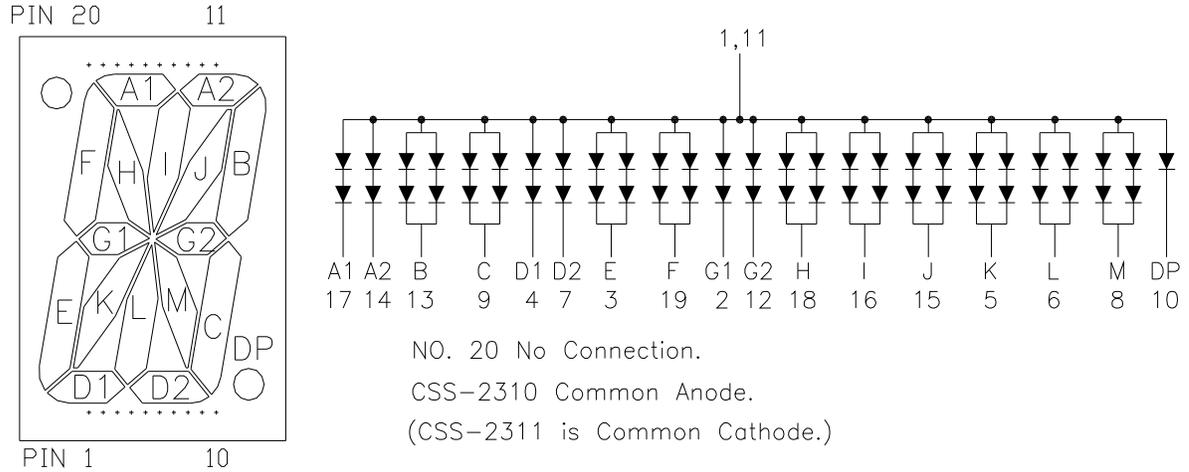

**Absolute Maximum Rating -**

(Ta=25°C)

Parameter	Symbol	Rating	Unit
Power Dissipation Per Dice	Pd	65	mW
Continuous Forward Current Per Dice	IAF	25	mA
Peak Current Per Dice (Duty Cycle 1/10, 1kHz)	IPF	90	mA
Derating Linear From 25°C Per Dice	-	0.33	mA/°C
Reverse Voltage Per Dice	VR	5	V
Operating Temperature	Topr	-25 ~ +85	°C
Storage Temperature	Tstg	-25 ~ +85	°C
Solder temperature 1/16 inch below seating plane for 3 seconds at 260°C			



**Model No : CSS-2310V9/2311V9**

**Electro-optical Characteristics -**

(Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward Voltage Per Segment (DP)	VF	-	4.2(2.1)	5.2(2.6)	V	IF=20mA
Luminous Intensity Per Segment	Iv	-	35	-	mcd	IF=10mA
Peak Emission Wavelength	$\lambda_p$	-	632	-	nm	IF=20mA
Spectrum Radiation Bandwidth	$\Delta \lambda$	-	20	-	nm	IF=20mA
Reverse Current	IR	-	-	100	$\mu A$	VR=10V
Luminous Intensity Matching Ratio	IV-m	-	-	2 : 1	-	IF=20mA



Spec. No.	PS-ND-0712
Rev.	A

**Model No : CSS-2310V9/2311V9**

**Typical Electrical / Optical Characteristics Curves -**

(Ta = 25°C Unless Otherwise Noted)

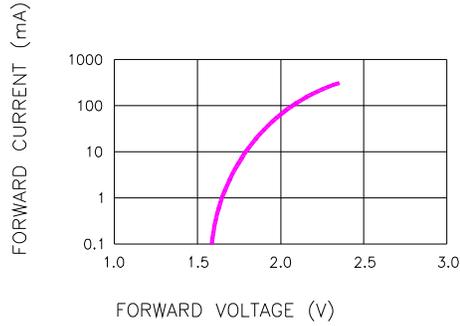


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE




Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

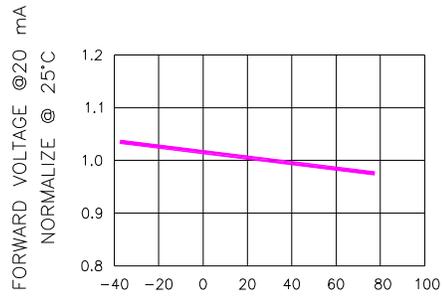


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

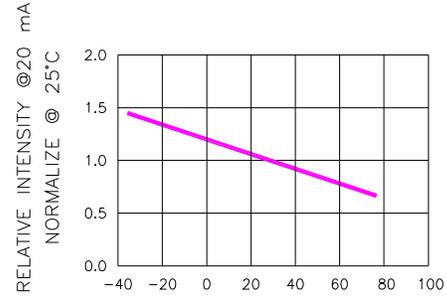


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE





Fig.5 RELATIVE INTENSITY VS. WAVELENGTH



Spec. No.	PS-ND-0712
Rev.	A

**Model No : CSS-2310V9/2311V9**

**Package Dimensions**

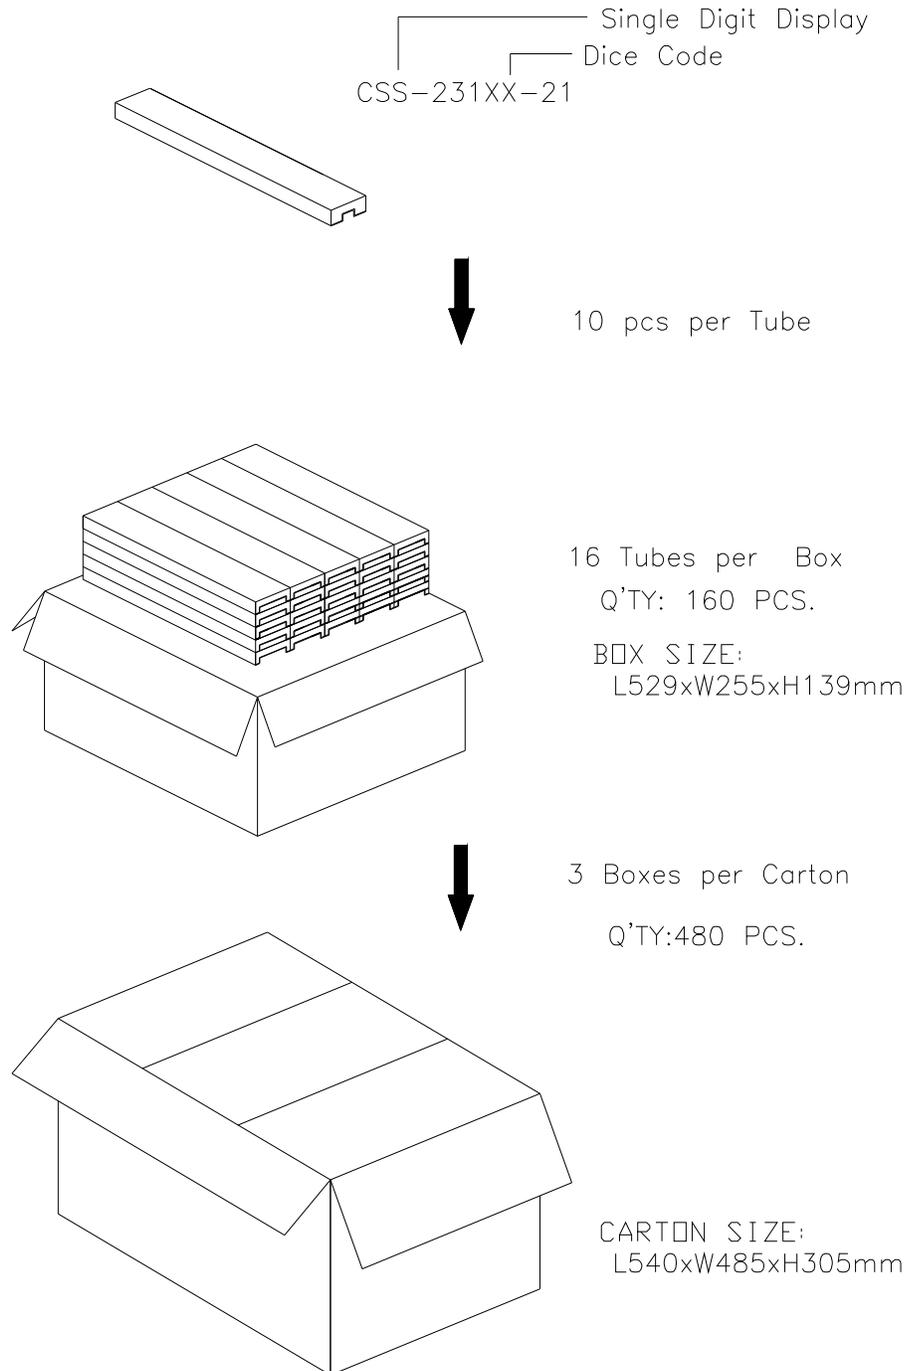

Note: The specifications may be changed without prior notice. Please contact us for the latest specifications.