



Certificate Number: Q10561

Certificate Number: E17276

## SE5A - SE5M

**PRV : 50 - 1000 Volts**  
**Io : 5.0 Amperes**


### FEATURES :

- \* High current capability
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Fast switching for high efficiency
- \* **Pb / RoHS Free**

### MECHANICAL DATA :

- \* Case : SMC Molded plastic
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Lead Formed for Surface Mount
- \* Polarity : Color band denotes cathode end
- \* Mounting position : Any
- \* Weight : 0.21 gram

## SURFACE MOUNT HIGH EFFICIENT RECTIFIERS

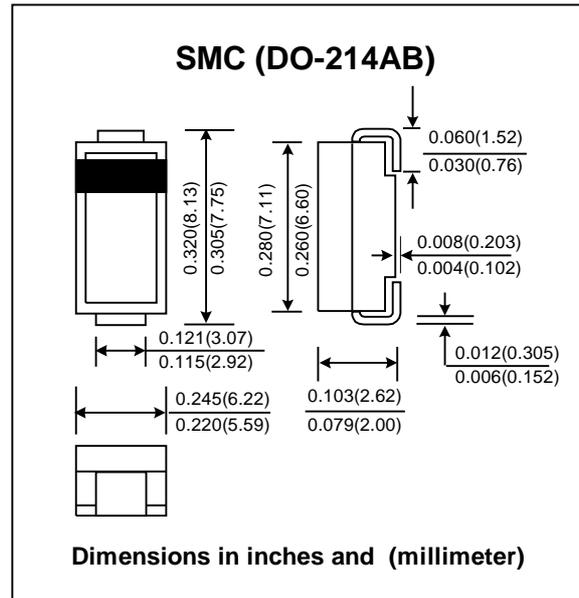

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

| RATING                                                                                                    | SYMBOL             | SE5A          | SE5B | SE5D | SE5E | SE5G | SE5J | SE5K | SE5M | UNIT |
|-----------------------------------------------------------------------------------------------------------|--------------------|---------------|------|------|------|------|------|------|------|------|
| Maximum Recurrent Peak Reverse Voltage                                                                    | V <sub>RRM</sub>   | 50            | 100  | 200  | 300  | 400  | 600  | 800  | 1000 | V    |
| Maximum RMS Voltage                                                                                       | V <sub>RMS</sub>   | 35            | 70   | 140  | 210  | 280  | 420  | 560  | 700  | V    |
| Maximum DC Blocking Voltage                                                                               | V <sub>DC</sub>    | 50            | 100  | 200  | 300  | 400  | 600  | 800  | 1000 | V    |
| Maximum Average Forward Current Ta = 55 °C                                                                | I <sub>F(AV)</sub> | 5.0           |      |      |      |      |      |      |      | A    |
| Maximum Peak Forward Surge Current, 8.3ms Single half sine wave superimposed on rated load (JEDEC Method) | I <sub>FSM</sub>   | 200           |      |      |      |      |      |      |      | A    |
| Maximum Forward Voltage at I <sub>F</sub> = 5.0 A                                                         | V <sub>F</sub>     | 1.1           |      |      |      | 1.7  |      |      |      | V    |
| Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta = 100 °C                            | I <sub>R</sub>     | 10            |      |      |      |      |      |      |      | μA   |
|                                                                                                           | I <sub>R(H)</sub>  | 300           |      |      |      |      |      |      |      | μA   |
| Maximum Reverse Recovery Time ( Note 1 )                                                                  | T <sub>rr</sub>    | 50            |      |      |      | 75   |      |      |      | ns   |
| Typical Junction Capacitance ( Note 2 )                                                                   | C <sub>J</sub>     | 50            |      |      |      |      |      |      |      | pf   |
| Junction Temperature Range                                                                                | T <sub>J</sub>     | - 65 to + 150 |      |      |      |      |      |      |      | °C   |
| Storage Temperature Range                                                                                 | T <sub>STG</sub>   | - 65 to + 150 |      |      |      |      |      |      |      | °C   |


### Notes :

- ( 1 ) Reverse Recovery Test Conditions : I<sub>F</sub> = 0.5 A, I<sub>R</sub> = 1.0 A, I<sub>rr</sub> = 0.25 A.
- ( 2 ) Measured at 1.0 MHz and applied reverse voltage of 4.0 V<sub>DC</sub>




## RATING AND CHARACTERISTIC CURVES ( SE5A - SE5M )


**FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM**

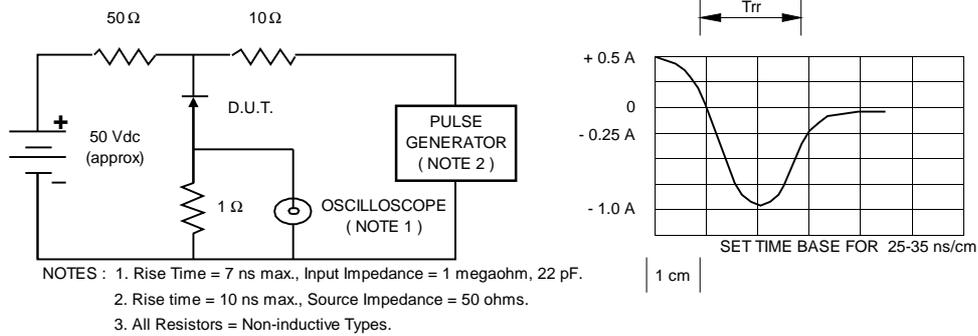


**FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

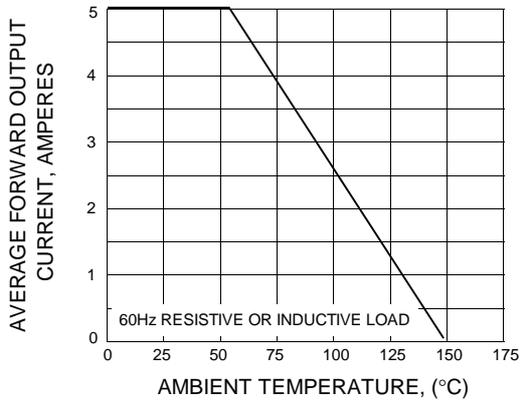

**FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

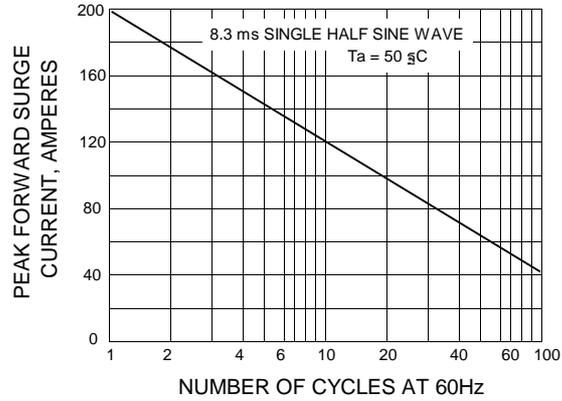

**FIG.4 - TYPICAL FORWARD CHARACTERISTICS**

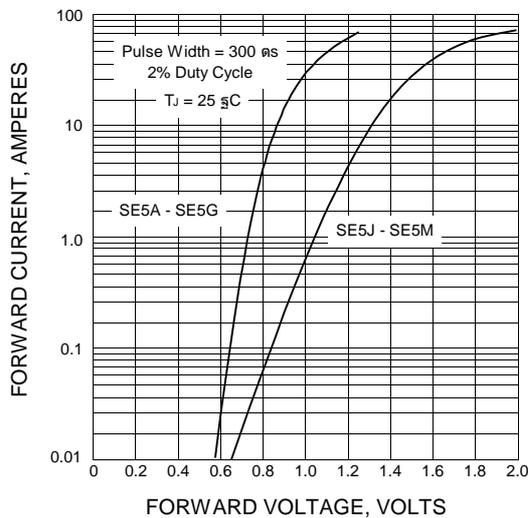

**FIG.5 - TYPICAL REVERSE CHARACTERISTICS**

