

300 Watts

ALQ25B50

Total Power: 300W (12V @ 25A)
 Input Voltages: 48V
 No. of Outputs: Single

DC Transformer



Special Features

- High efficiency (96% Typical)
- -40°C to +100°C Ambient Air Operation
- Industry standard package Qtr Brick
1.48" x 2.30" x 0.40"
- High capacitive load limit on start-up
- 12V @ 25A Intermediate Bus Voltage for DPA application
- Regulation to zero load
- Output Enable Pin
- Meets Basic Insulation
- Input UVLO and Overvoltage Protection
- Over Temperature Protection

Environmental

Ambient air operating temperature range:
-40°C to +100°C

Storage temperature: -55°C to +125°C

Overtemperature protection: 115°C typical

MTBF: > 1 million hours

Safety

UL, cUL 60950

TUV EN60950

Electrical Specs

Input

Input Range ¹	42 to 53 VDC
Efficiency	96%@12V (Typ)
Over Voltage Protection	60V
Input UVLO ¹	39V to 42V

Output

Output Current	0A to 25A max (300W output power)
Line Regulation	10.25V to 13.60V 8.50V to 13.60V (for "-AL" option)
Load Regulation	±3% Vo (Typical)
Noise/Ripple ²	100mV (Typical)
Transient Response	200mV typical deviation 50% to 75% Load Change 100µs max recovery time
Over Current Limit ¹	115% I _{O,MAX} typical (latching)
Switching Frequency	800kHz

Control

Enable	TTL compatible (Positive or Negative Enable Logic)
--------	---

Isolation Voltage

Input to Output	2000Vdc max
-----------------	-------------

* Specifications are subject to change without notice.

AMERICAS

5810 Van Allen Way
 Carlsbad, CA 92008
 Telephone: 760-930-4600
 Facsimile: 760-930-0698

EUROPE

Astec House, Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX, UK
 Telephone: 44 (1384) 842-211
 Facsimile: 44 (1384) 843-355

ASIA

Units 2111-2116, Level 21
 Tower1, Metroplaza
 223, Hing Fong Road
 Fwai Fong, New Territories
 Hong Kong
 Telephone: 852-2437-9662
 Facsimile: 852-2402-4426



ALQ25B50

Ordering Information

Input Voltage	Output Voltage	Output Current	Efficiency	Model Number
42V to 53V	12.0V	25A*	96% Typ	ALQ25B50
42V to 53V	12.0V	25A*	96% Typ	ALQ25B50-6
42V to 53V	12.0V	25A*	96% Typ	ALQ25B50N
42V to 53V	12.0V	25A*	96% Typ	ALQ25B50N-6
36V to 53V	12.0V	25A*	96% Typ	ALQ25B50N-AL

OPTIONS:

Enable Function "N" = negative logic enable
 without "N" = positive logic enable (default)

Pin Length Option "-6" = 3.7mm (nominal)
 Standard pin length is 5mm nominal

Others "-AL" = Autorecovery mode and lower UVLO range (34V to 36Vdc)

* Derating / airflow required at elevated ambient operating temperature, consult the Technical Reference Notes


Pin Assignments

Single Output


1. + Vin
2. Enable
3. - Vin
4. - Vout
5. + Vout

Notes:


1. Part number suffix "-AL" designates:
 - 36V to 53V Input voltage range
 - lower UVLO range (34V to 36V)
 - Autorecovery mode after fault protection
2. 20MHz BW limited with external 10uF tantalum cap. + 0.1uF ceramic cap across the output. 220uF low ESR cap required across the input pins.
3. Output may need to be derated and airflow added when operating at elevated ambient temperature.
4. All specifications are typical at nominal line, full load and 25°C ambient temp unless otherwise noted.
5. Technical Reference Notes should be consulted for detailed information when available.
6. Warranty: 1yr



PIN SIDE DOWN



SIDE VIEW

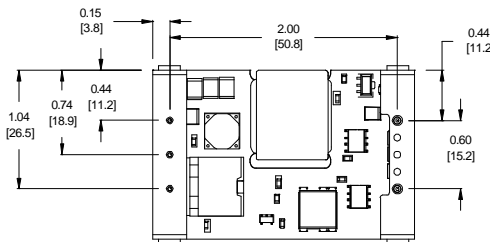

PIN SIDE UP

NOTES:

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS)
 PIN PLACEMENT TOLERANCE: ± 0.005(0.127)
 MECHANICAL TOLERANCE ± .002(0.5)

Astec reserves the right to make changes to the information contained herein without notice and assumes no liability as a result of its use or application. (REV 01: APRIL 7, 2005)

Astec Industry Standard