


Description

TVS diodes are designed to replace multilayer varistors (MLVs) in portable applications such as cell phones, notebook computers, and PDA's. They offer superior electrical characteristics such as lower clamping voltage and no device degradation when compared to MLVs.

The SES5VLCT523-3U is a TVS array designed to protect I/O or data lines from the damaging effects of ESD. The SOT-523 is a very small package which allows space saving on high density printed circuit board and also gives the designer the flexibility to provide two I/O lines protection.



Feature

- Solid-state silicon-avalanche technology
- SOT-523 package
- Protect up two data lines
- Low clamping voltage
- Working voltage: 5V
- Low leakage current
- 125 watts peak pulse power($T_p=8/20\mu s$)
- Complies with the following standards: IEC 61000-4-2(ESD)Air-15kv,Contact-8kv


Applications

- High-Definition Multimedia Interface(HDMI)
- Mobile Display Digital Interface(MDDI)
- RF/Antenna Circuits
- USB 2.0&Firewire Ports
- HBT Power Amp Protection
- Infiniband Transceiver Protection

www.DataSheet4U.com

Electrical characteristics per line@25°C(unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Reverse stand-off voltage	V_{RWM}				5	V
Reverse Breakdown voltage	V_{BR}	$I_t = 1mA$	6			V
Reverse Leakage Current	I_R	$V_{RWM} = 5V T=25^\circ C$			1	μA
Clamping Voltage	V_C	$I_{PP} = 1A, t_p = 8/20\mu S$ pin1 to pin2			15	V
Clamping Voltage	V_C	$I_{PP} = 5A, t_p = 8/20\mu S$ pin1 or pin2 to pin3			22	V
Clamping Voltage	V_C	$I_{PP} = 5A, t_p = 8/20\mu S$ pin1 to Pin2			25	V
Junction Capacitance	C_j	$V_R=0V f = 1MHz$ Pin1 to Pin2		0.6	0.9	pF
Junction Capacitance	C_j	$V_R=0V f = 1MHz$ pin1 or Pin2 to Pin3			1.2	pF



GOOD-ARK

ESD Protector

SES Series







SES5VLCT523-3U

ROHS

Absolute maximum rating @25°C

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p=8/20\mu S$)	P_{pp}	125	Watts
Peak Pulse Power ($t_p=8/20\mu S$)	I_{pp}	5	A
Operating Temperature	T_J	-55 to +125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Typical Characteristics

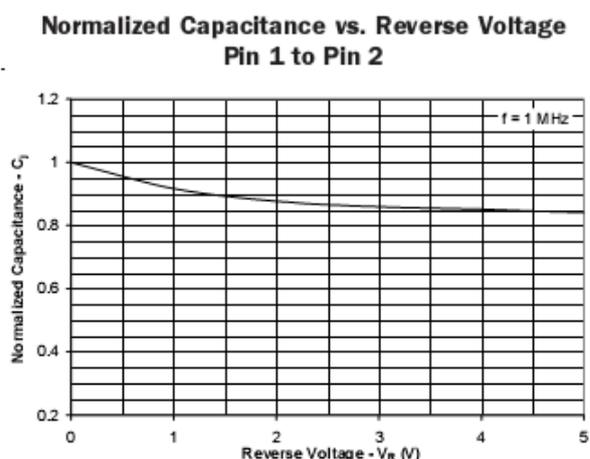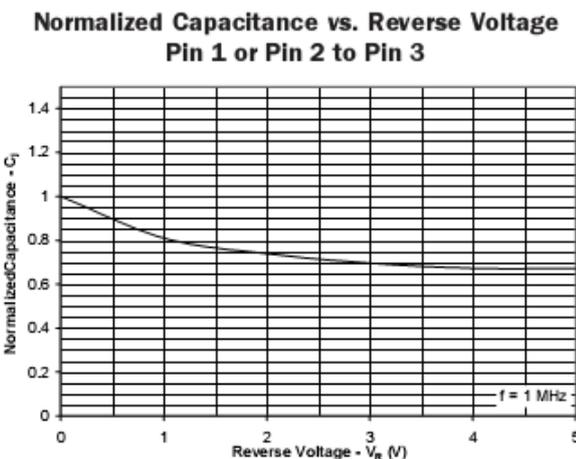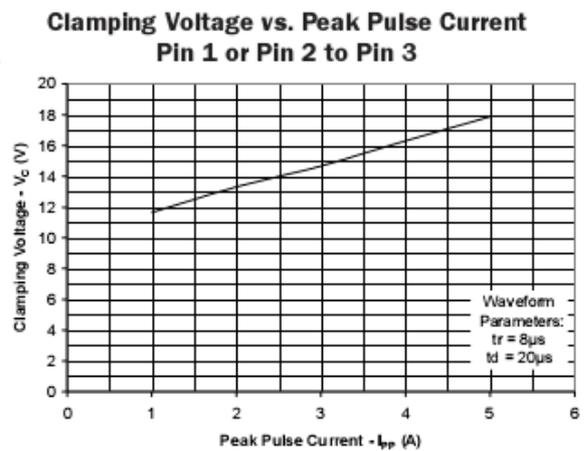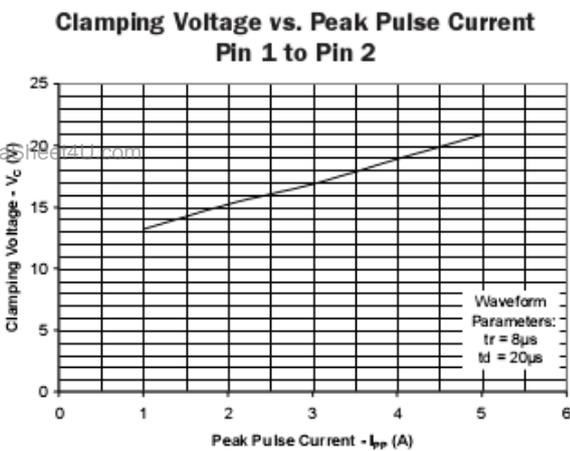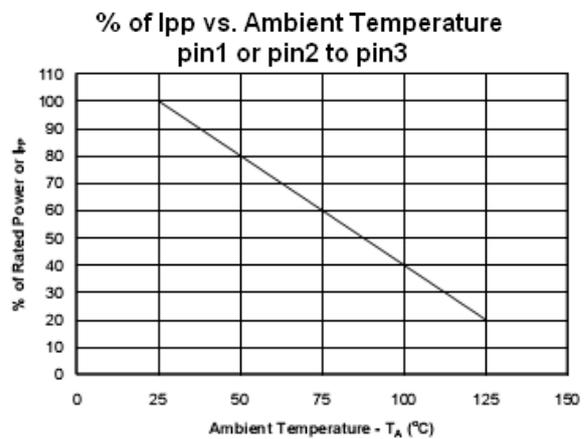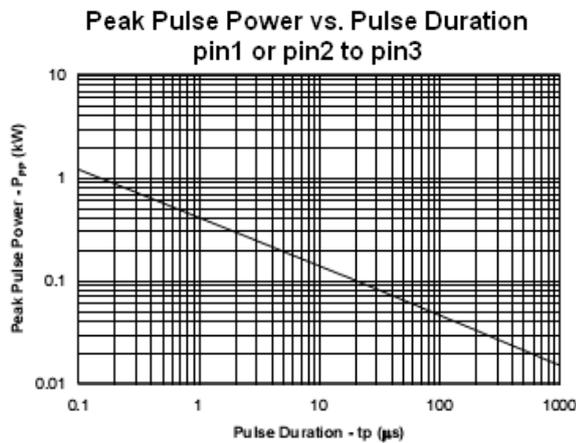



GOOD-ARK


ESD Protector

SES Series


ROHS

SES5VLCT523-3U


Insertion Loss S21 (Pin 1 to Pin 2)

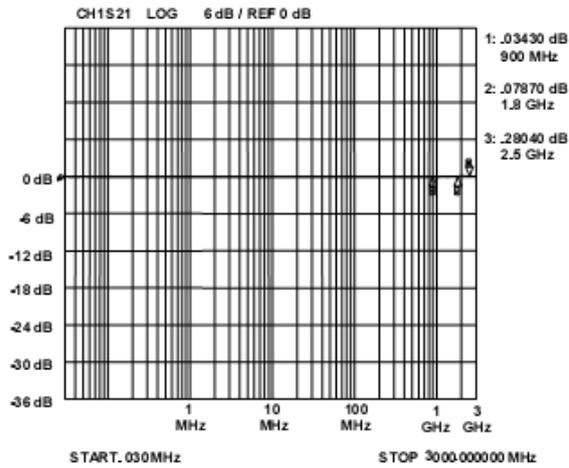


Insertion Loss S21 (Pin 1 or Pin 2 to Pin 3)

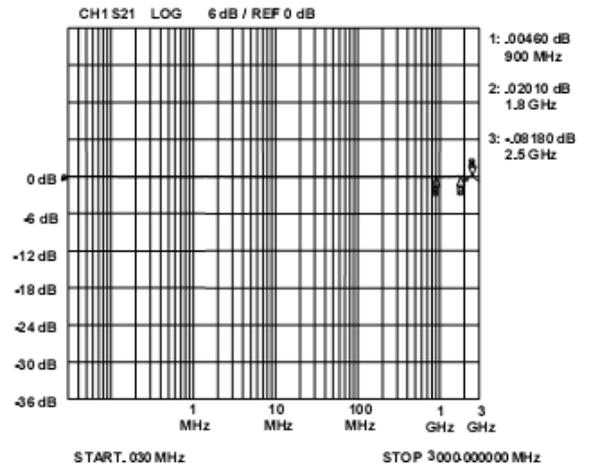


ESD Response (4kV Contact per IEC 61000-4-2)

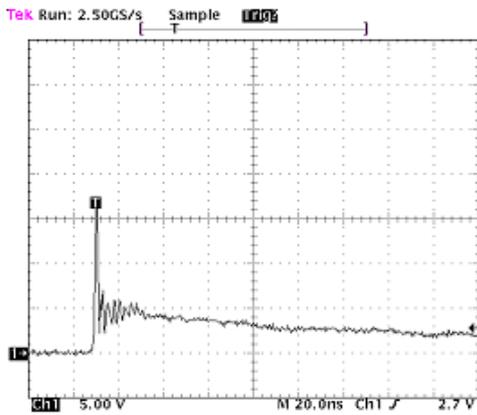


ESD Response (8kV Contact per IEC 61000-4-2)


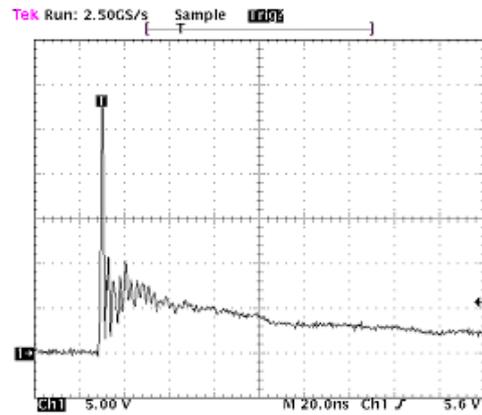


Analog Crosstalk

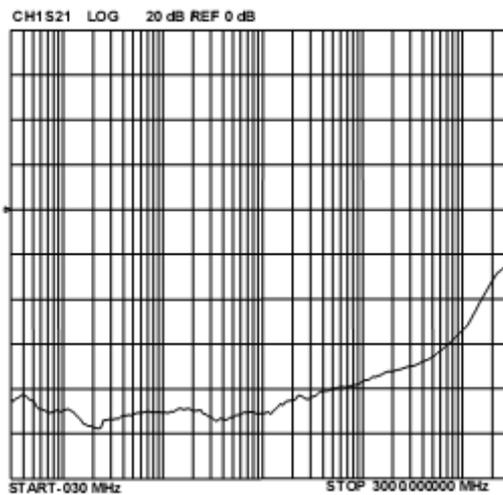



Product dimension and pad size

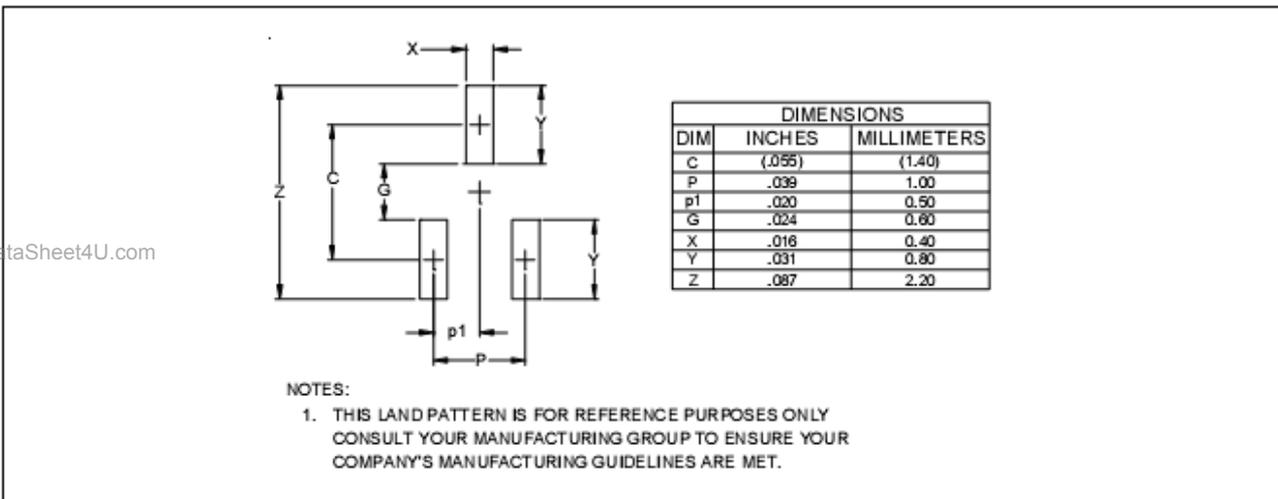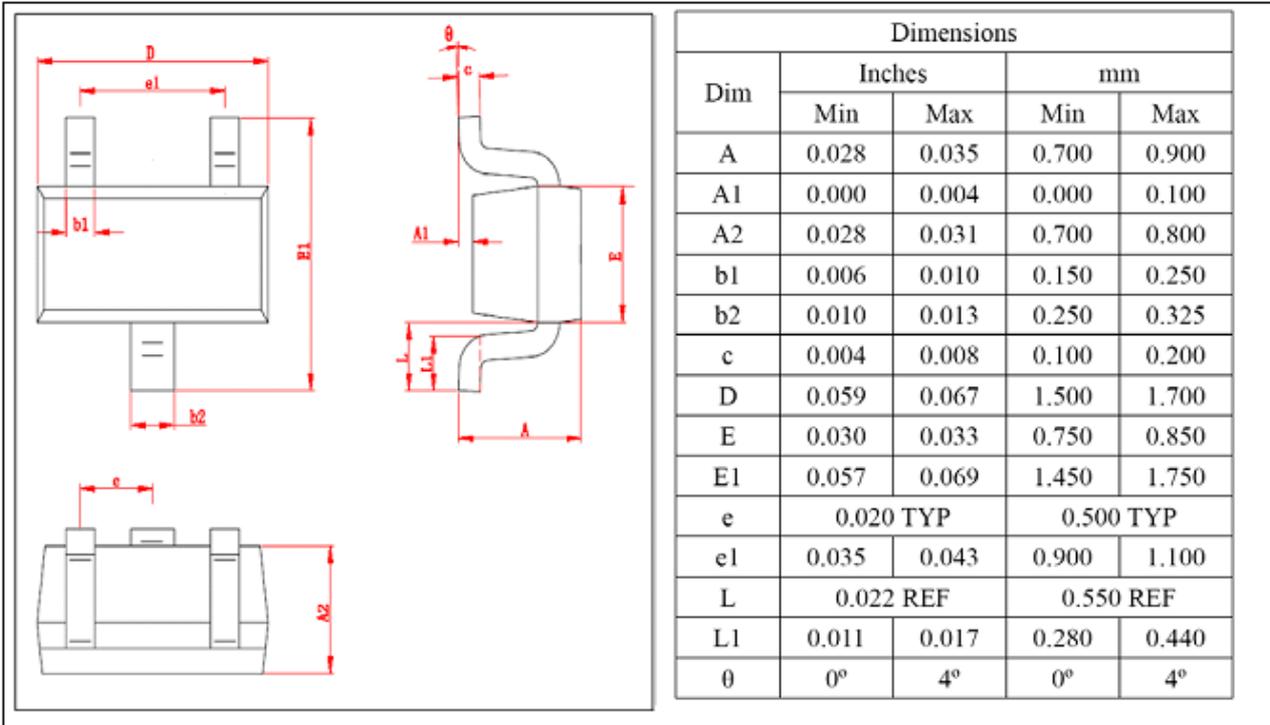

Revision History

Revision	Date	Changes
1.0	2008-8-20	-