

# FLL410IK-3C

www.DataSheet4U.com


## L-Band High Power GaAs FET

### FEATURES

- High Output Power: Pout=46.0dBm(Typ.)
- High Gain: GL=13.0dB(Typ.)
- High PAE:  $\eta_{add}$ =52%(Typ.)
- Broad Band: 2.5~2.7GHz
- Hermetically Sealed Package

### DESCRIPTION

The FLL410IK-3C is a partially matched 40 Watt GaAs FET that is designed for use in 2.5 – 2.7 GHz band amplifiers. This new product is uniquely suited for use in MMDS applications as it offers excellent linearity, high efficiency, high gain, long term reliability and ease of use.

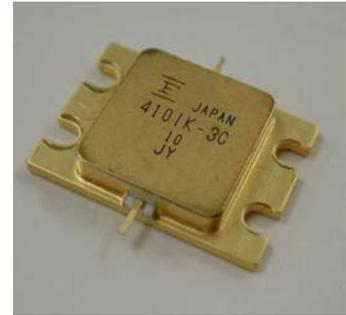

Fujitsu's stringent Quality Assurance Program assures the highest reliability and consistent performance.

### ABSOLUTE MAXIMUM RATINGS (Case Temperature Tc=25°C)

Item	Symbol	Rating	Unit
Drain-Source Voltage	V <sub>DS</sub>	15	V
Gate-Source Voltage	V <sub>GS</sub>	-5	V
Total Power Dissipation	PT	100	W
Storage Temperature	T <sub>stg</sub>	-65 to +175	°C
Channel Temperature	T <sub>ch</sub>	175	°C

### RECOMMENDED OPERATING CONDITION(Case Temperature Tc=25°C)

Item	Symbol	Condition	Limit	Unit
DC Input Voltage	V <sub>DS</sub>		≤12	V
Gate Current	I <sub>GF</sub>	R <sub>G</sub> =5Ω	≤88	mA
Gate Current	I <sub>GR</sub>	R <sub>G</sub> =5Ω	≥-25	mA
Operating Channel Temperature	T <sub>ch</sub>		≤145	°C

### ELECTRICAL CHARACTERISTICS (Case Temperature Tc=25°C)

Item	Symbol	Test Conditions	Limit			Unit
			Min.	Typ.	Max.	
Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> =5V, V <sub>GS</sub> =0V	-	4.0	-	A
Pinch-off Voltage	V <sub>p</sub>	V <sub>DS</sub> =5V, I <sub>DS</sub> =110mA	-0.1	-0.3	-0.5	V
Gate-Source Breakdown Voltage	V <sub>GSO</sub>	I <sub>GS</sub> =-1.1mA	-5.0	-	-	V
Output Power	P <sub>OUT</sub>	V <sub>DS</sub> =12V f=2.6 GHz I <sub>DS</sub> =3A Pin=35.0dBm	45.0	46.0	-	dBm
Linear Gain *1	GL		12.0	13.0	-	dB
Drain Current	I <sub>DSR</sub>		-	5.9	7.6	A
Power-added Efficiency	$\eta_{add}$		-	52	-	%
Thermal Resistance	R <sub>th</sub>	Channel to Case	-	1.3	1.5	°C/W

\* 1 : GL is measured at Pin=22.0dBm

CASE STYLE: IK


ESD	Class III	2000V ~
-----	-----------	---------

Note : Based on EIAJ ED-4701 C-111A(C=100pF, R=1.5kΩ)


# FLL410IK-3C

L-Band High Power GaAs FET


**OUTPUT POWER vs. INPUT POWER**

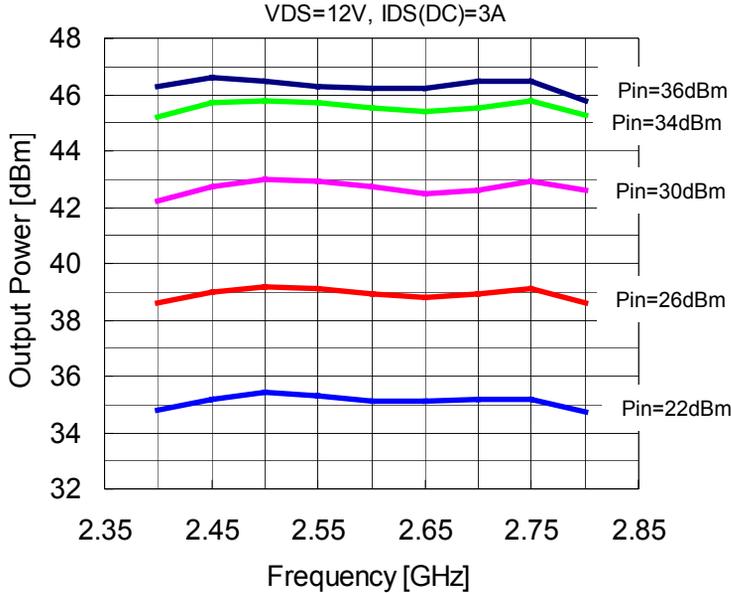

**OUTPUT POWER, POWER ADDED EFFICIENCY vs. TOTAL INPUT POWER**

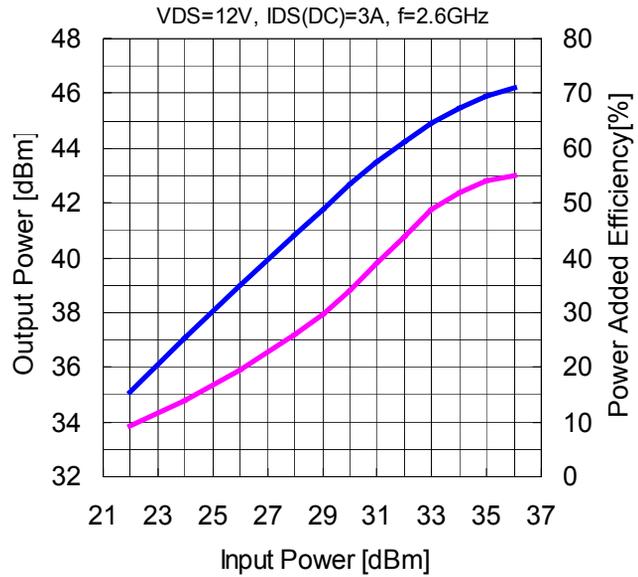

**IMD vs. TOTAL OUTPUT POWER**


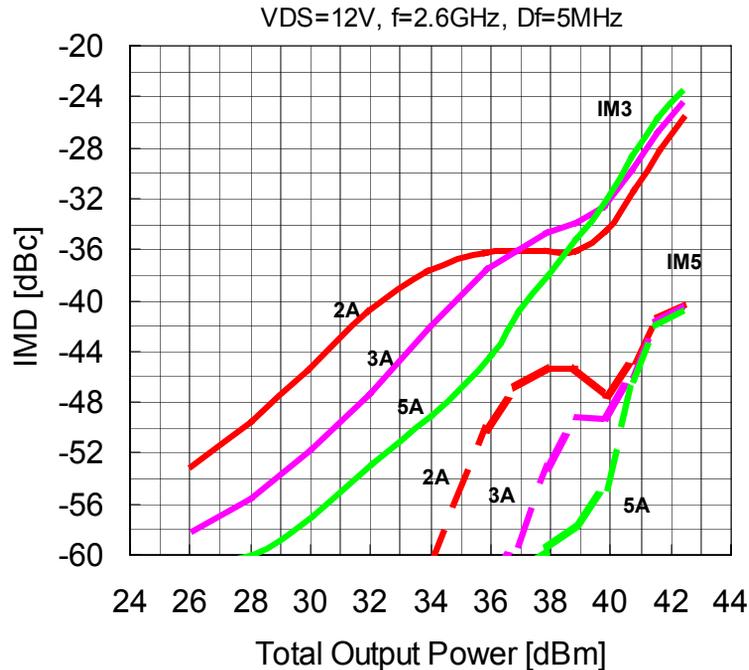


# FLL410IK-3C

www.DataSheet4U.com

## L-Band High Power GaAs FET

### ■ S-PARAMETER

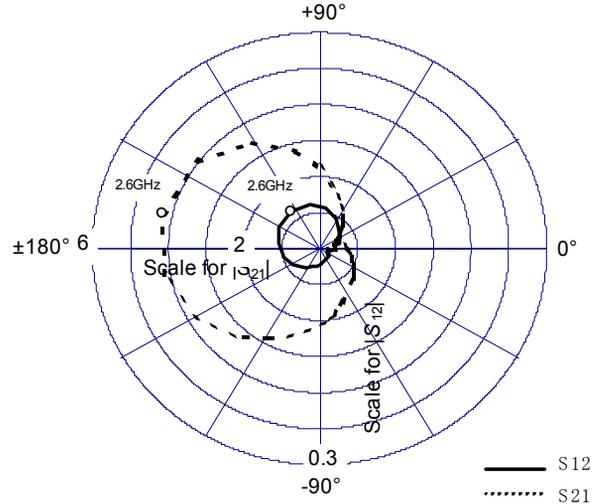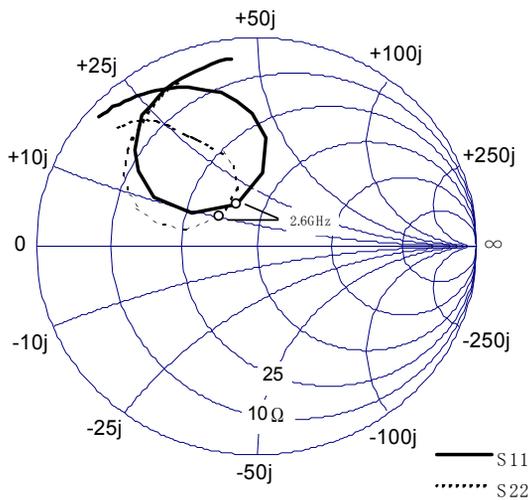

VDS=12V, IDS=3.0A

Freq [GHz]	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
1.50	0.95	139.13	0.66	5.71	0.01	-7.76	0.85	137.80
1.60	0.94	136.13	0.73	-1.34	0.01	-21.24	0.83	134.28
1.70	0.92	132.48	0.83	-11.38	0.01	-27.54	0.80	130.79
1.80	0.91	129.08	0.93	-21.69	0.01	-37.64	0.76	127.82
1.90	0.89	125.19	1.08	-33.36	0.01	-48.85	0.72	125.28
2.00	0.87	121.65	1.26	-45.28	0.01	-64.79	0.68	122.79
2.20	0.83	112.20	1.82	-76.40	0.02	-97.72	0.61	119.58
2.30	0.78	106.32	2.27	-95.83	0.02	-122.75	0.57	117.16
2.40	0.70	97.54	2.86	-118.23	0.03	-148.63	0.52	112.58
2.50	0.52	85.55	3.75	-149.12	0.04	173.08	0.40	105.59
2.60	0.22	114.34	4.29	166.53	0.04	127.14	0.22	139.17
2.70	0.52	153.17	3.43	121.10	0.04	82.29	0.47	165.62
2.80	0.72	139.88	2.23	89.90	0.03	50.87	0.65	155.17
2.90	0.82	129.39	1.54	71.09	0.02	27.82	0.72	145.97
3.00	0.85	121.63	1.10	57.03	0.02	15.34	0.76	138.08
3.10	0.87	116.02	0.87	45.39	0.01	-3.89	0.79	130.98
3.20	0.88	110.41	0.66	35.06	0.01	-7.86	0.82	125.09
3.30	0.89	105.71	0.56	28.49	0.01	-16.93	0.84	120.80
3.40	0.90	100.75	0.47	20.22	0.01	-25.52	0.86	117.16
3.50	0.91	97.00	0.42	15.07	0.01	-22.89	0.86	113.34




# FLL410IK-3C

www.DataSheet4U.com

## L-Band High Power GaAs FET

### ■ Package Out Line

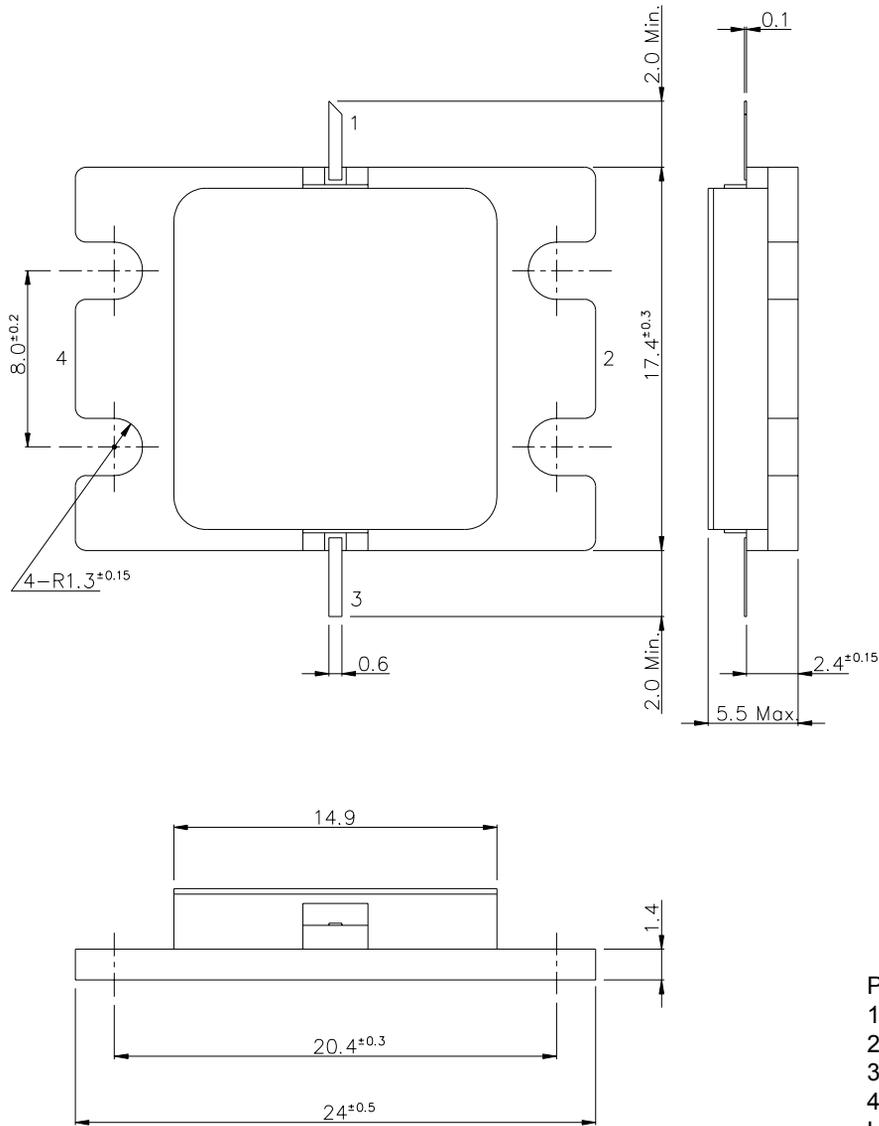

#### PIN ASSIGNMENT

- 1 : GATE
- 2 : SOURCE
- 3 : DRAIN
- 4 : SOURCE

Unit : mm

# FLL410IK-3C

## L-Band High Power GaAs FET

www.DataSheet4U.com

For further information please contact :

### FUJITSU COMPOUND SEMICONDUCTOR, INC.

2355 Zanker Rd.  
San Jose, CA 95131-1138, U.S.A.  
TEL: (408) 232-9500  
FAX: (408) 428-9111  
www.fcsi.fujitsu.com

### FUJITSU QUANTUM DEVICES EUROPE LTD.

Network House  
Norreys Drive  
Maidenhead, Berkshire SL6 4FJ  
TEL: +44 (0) 1628 504800  
FAX: +44 (0) 1628 504888

### FUJITSU QUANTUM DEVICES SINGAPORE PTE LTD.

HONG KONG BRANCH  
Rm. 1101, Ocean Centre, 5 Canton Rd.  
Tsim Sha Tsui, Kowloon, Hong Kong  
TEL: +852-2377-0227  
FAX: +852-2377-3921

### FUJITSU QUANTUM DEVICES LTD.

1000 Kamisukiahara, showa-cho  
Nakakomagun, Yamanashi  
409-3883, Japan  
(Kokubo Industrial Park)  
TEL: +81-55-275-4411  
FAX: +81-55-275-9461

### FUJITSU QUANTUM DEVICES LIMITED

Business Development Division  
Hachioji Daiichi-Seimei Bldg., 11<sup>th</sup> Floor  
3-20-6 Myojin-cho  
Hachioji-city, Tokyo 192-0046, Japan  
TEL: +81-426-43-5885  
FAX: +81-426-43-5582

Fujitsu Limited reserves the right to change products and specifications without notice.  
The information does not convey any license under rights of Fujitsu Limited or others.

© 2004 FUJITSU COMPOUND SEMICONDUCTOR, INC.  
Printed in U.S.A.

#### CAUTION

Fujitsu Compound Semiconductor Products contain **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not put these products into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

The Fujitsu logo consists of the word "FUJITSU" in a bold, red, sans-serif font. Above the letter "I" is a red infinity symbol (∞). A horizontal red line extends from the right side of the "FUJITSU" text across the page.