

CentralTM Semiconductor Corp.

145 Adams Ave., Hauppauge, NY 11788 USA
Phone (631) 435-1110 FAX (631) 435-1824

Manufacturers of World Class Discrete Semiconductors
www.centrasemi.com

CZ5342B THRU CZ5388B

**6.8 VOLTS THRU 200 VOLTS
5.0W, 5% TOLERANCE**

DO-201 CASE

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CZ5342B Series Silicon Zener Diode is a high quality voltage regulator designed for use in industrial, commercial, entertainment and computer applications.

ABSOLUTE MAXIMUM RATINGS:

Power Dissipation (@ $T_A=25^\circ\text{C}$)

Operating and Storage Temperature

SYMBOL

P_D

T_J, T_{stg}

5.0

-65 to +150

UNITS

W

$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$), $V_F=1.2\text{V MAX @ } I_F=1.0\text{A}$ FOR ALL TYPES.

| Type No. | Zener Voltage $V_Z @ I_{ZT}$ | | | Test Current I_{ZT} | Maximum Zener Impedance | | | Maximum Reverse Current | | Maximum Surge Current (Note 1) I_r | Maximum Voltage Regulation (Note 2) ΔV_Z | Maximum Regulator Current I_{ZM} | Marking Code |
|----------|---------------------------------|-------|-------|--------------------------|-------------------------|-------------------|-------------|-------------------------|------|--|--|---------------------------------------|--------------|
| | MIN | NOM | MAX | | $Z_{ZT} @ I_{ZT}$ | $Z_{ZK} @ I_{ZK}$ | $I_R @ V_R$ | | | | | | |
| | Volts | Volts | Volts | | | | Ω | Ω | mA | | | | |
| CZ5342B | 6.460 | 6.8 | 7.140 | 175 | 1.0 | 200 | 1.0 | 100 | 5.2 | 11.5 | 0.25 | 700 | CZ5342B |
| CZ5343B | 7.125 | 7.5 | 7.875 | 175 | 1.5 | 200 | 1.0 | 100 | 5.7 | 10.7 | 0.25 | 630 | CZ5343B |
| CZ5344B | 7.790 | 8.2 | 8.610 | 150 | 1.5 | 200 | 1.0 | 100 | 6.2 | 10.0 | 0.20 | 580 | CZ5344B |
| CZ5345B | 8.265 | 8.7 | 9.135 | 150 | 2.0 | 200 | 1.0 | 100 | 6.6 | 7.5 | 0.20 | 545 | CZ5345B |
| CZ5346B | 8.645 | 9.1 | 9.555 | 150 | 2.0 | 150 | 1.0 | 7.5 | 6.9 | 9.2 | 0.22 | 520 | CZ5346B |
| CZ5347B | 9.500 | 10 | 10.50 | 125 | 2.0 | 125 | 1.0 | 5.0 | 7.6 | 8.6 | 0.22 | 475 | CZ5347B |
| CZ5348B | 10.45 | 11 | 11.55 | 125 | 2.5 | 125 | 1.0 | 5.0 | 8.4 | 8.0 | 0.25 | 430 | CZ5348B |
| CZ5349B | 11.40 | 12 | 12.60 | 100 | 2.5 | 125 | 1.0 | 2.0 | 9.1 | 7.5 | 0.25 | 395 | CZ5349B |
| CZ5350B | 12.35 | 13 | 13.65 | 100 | 2.5 | 100 | 1.0 | 1.0 | 9.9 | 7.0 | 0.25 | 365 | CZ5350B |
| CZ5351B | 13.30 | 14 | 14.70 | 100 | 2.5 | 75 | 1.0 | 1.0 | 10.6 | 6.7 | 0.25 | 340 | CZ5351B |
| CZ5352B | 14.25 | 15 | 15.75 | 75 | 2.5 | 75 | 1.0 | 1.0 | 11.5 | 6.3 | 0.25 | 315 | CZ5352B |
| CZ5353B | 15.20 | 16 | 16.80 | 75 | 2.5 | 75 | 1.0 | 1.0 | 12.2 | 6.00 | 0.30 | 295 | CZ5353B |
| CZ5354B | 16.15 | 17 | 17.85 | 70 | 2.5 | 75 | 1.0 | 0.5 | 12.9 | 5.8 | 0.35 | 280 | CZ5354B |
| CZ5355B | 17.10 | 18 | 18.90 | 65 | 2.5 | 75 | 1.0 | 0.5 | 13.7 | 5.5 | 0.40 | 264 | CZ5355B |
| CZ5356B | 18.05 | 19 | 19.95 | 65 | 3.0 | 75 | 1.0 | 0.5 | 14.4 | 5.3 | 0.40 | 250 | CZ5356B |
| CZ5357B | 19.00 | 20 | 21.00 | 65 | 3.0 | 75 | 1.0 | 0.5 | 15.2 | 5.1 | 0.40 | 237 | CZ5357B |
| CZ5358B | 20.90 | 22 | 23.10 | 50 | 3.5 | 75 | 1.0 | 0.5 | 16.7 | 4.7 | 0.45 | 216 | CZ5358B |
| CZ5359B | 22.80 | 24 | 25.20 | 50 | 3.5 | 100 | 1.0 | 0.5 | 18.2 | 4.4 | 0.55 | 198 | CZ5359B |
| CZ5360B | 23.75 | 25 | 26.25 | 50 | 4.0 | 110 | 1.0 | 0.5 | 19.0 | 4.3 | 0.55 | 190 | CZ5360B |
| CZ5361B | 25.65 | 27 | 28.35 | 50 | 5.0 | 120 | 1.0 | 0.5 | 20.6 | 4.1 | 0.60 | 176 | CZ5361B |
| CZ5362B | 26.60 | 28 | 29.40 | 50 | 6.0 | 130 | 1.0 | 0.5 | 21.2 | 3.9 | 0.60 | 170 | CZ5362B |
| CZ5363B | 28.50 | 30 | 31.50 | 40 | 8.0 | 140 | 1.0 | 0.5 | 22.8 | 3.7 | 0.60 | 158 | CZ5363B |
| CZ5364B | 31.35 | 33 | 34.65 | 40 | 10 | 150 | 1.0 | 0.5 | 25.1 | 3.5 | 0.65 | 144 | CZ5364B |
| CZ5365B | 34.20 | 36 | 37.80 | 30 | 11 | 160 | 1.0 | 0.5 | 27.4 | 3.3 | 0.65 | 132 | CZ5365B |

(CONTINUED ON REVERSE SIDE)

R2

CZ5342B SERIES

AXIAL LEAD ZENER DIODE


ELECTRICAL CHARACTERISTICS: ($T_A=25^{\circ}\text{C}$), $V_F=1.2\text{V MAX @ } I_F=1.0\text{A}$ FOR ALL TYPES.

| TYPE NO. | Zener Voltage $V_Z @ I_{ZT}$ | | | Test Current | Maximum Zener Impedance | | | Maximum Reverse Current | | Maximum Surge Current (Note 1) | Maximum Voltage Regulation (Note 2) | Maximum Regulator Current | Marking Code |
|----------|---------------------------------|-------|-------|--------------|-------------------------|-------------------|-------------------|-------------------------|-------|-----------------------------------|--|---------------------------|--------------|
| | MIN | NOM | MAX | | I_{ZT} | $Z_{ZT} @ I_{ZT}$ | $Z_{ZK} @ I_{ZK}$ | $I_R @ V_R$ | | | | | |
| | Volts | Volts | Volts | | mA | Ω | Ω | μA | Volts | | | | |
| CZ5366B | 37.05 | 39 | 40.95 | 30 | 14 | 170 | 1.0 | 0.5 | 29.7 | 3.1 | 0.65 | 122 | CZ5366B |
| CZ5367B | 40.85 | 43 | 45.15 | 30 | 20 | 190 | 1.0 | 0.5 | 32.7 | 2.8 | 0.70 | 110 | CZ5367B |
| CZ5368B | 44.65 | 47 | 49.35 | 25 | 25 | 210 | 1.0 | 0.5 | 35.8 | 2.7 | 0.80 | 100 | CZ5368B |
| CZ5369B | 48.45 | 51 | 53.55 | 25 | 27 | 230 | 1.0 | 0.5 | 38.8 | 2.5 | 0.90 | 93.0 | CZ5369B |
| CZ5370B | 53.20 | 56 | 58.80 | 20 | 35 | 280 | 1.0 | 0.5 | 42.6 | 2.3 | 1.00 | 86.0 | CZ5370B |
| CZ5371B | 57.00 | 60 | 63.00 | 20 | 40 | 350 | 1.0 | 0.5 | 45.5 | 2.2 | 1.20 | 79.0 | CZ5371B |
| CZ5372B | 58.90 | 62 | 65.10 | 20 | 42 | 400 | 1.0 | 0.5 | 47.1 | 2.1 | 1.35 | 76.0 | CZ5372B |
| CZ5373B | 64.60 | 68 | 71.40 | 20 | 44 | 500 | 1.0 | 0.5 | 51.7 | 2.0 | 1.50 | 70.0 | CZ5373B |
| CZ5374B | 71.25 | 75 | 78.75 | 20 | 45 | 620 | 1.0 | 0.5 | 56.0 | 1.9 | 1.60 | 63.0 | CZ5374B |
| CZ5375B | 77.90 | 82 | 86.10 | 15 | 65 | 720 | 1.0 | 0.5 | 62.2 | 1.8 | 1.80 | 58.0 | CZ5375B |
| CZ5376B | 82.65 | 87 | 91.35 | 15 | 75 | 760 | 1.0 | 0.5 | 66.0 | 1.7 | 2.00 | 54.5 | CZ5376B |
| CZ5377B | 86.45 | 91 | 95.55 | 15 | 75 | 760 | 1.0 | 0.5 | 69.2 | 1.6 | 2.20 | 52.5 | CZ5377B |
| CZ5378B | 95.00 | 100 | 105.0 | 12 | 90 | 800 | 1.0 | 0.5 | 76.0 | 1.5 | 2.50 | 47.5 | CZ5378B |
| CZ5379B | 104.5 | 110 | 115.5 | 12 | 125 | 1000 | 1.0 | 0.5 | 83.6 | 1.4 | 2.50 | 43.0 | CZ5379B |
| CZ5380B | 114.0 | 120 | 126.0 | 10 | 170 | 1150 | 1.0 | 0.5 | 91.2 | 1.3 | 2.50 | 39.5 | CZ5380B |
| CZ5381B | 123.5 | 130 | 136.5 | 10 | 190 | 1250 | 1.0 | 0.5 | 98.8 | 1.2 | 2.50 | 36.6 | CZ5381B |
| CZ5382B | 133.0 | 140 | 147.0 | 8.0 | 230 | 1500 | 1.0 | 0.5 | 106 | 1.2 | 2.50 | 34.0 | CZ5382B |
| CZ5383B | 142.5 | 150 | 157.5 | 8.0 | 330 | 1500 | 1.0 | 0.5 | 114 | 1.1 | 3.00 | 31.6 | CZ5383B |
| CZ5384B | 152.0 | 160 | 168.0 | 8.0 | 350 | 1650 | 1.0 | 0.5 | 122 | 1.1 | 3.00 | 29.4 | CZ5384B |
| CZ5385B | 161.5 | 170 | 178.5 | 8.0 | 380 | 1750 | 1.0 | 0.5 | 129 | 1.0 | 3.00 | 28.0 | CZ5385B |
| CZ5386B | 171.0 | 180 | 189.0 | 5.0 | 430 | 1750 | 1.0 | 0.5 | 137 | 1.0 | 4.00 | 26.4 | CZ5386B |
| CZ5387B | 180.5 | 190 | 199.5 | 5.0 | 450 | 1850 | 1.0 | 0.5 | 144 | 0.9 | 5.00 | 25.0 | CZ5387B |
| CZ5388B | 190.0 | 200 | 210.0 | 5.0 | 480 | 1850 | 1.0 | 0.5 | 152 | 0.9 | 5.00 | 23.6 | CZ5388B |

Note 1. Surge Current (i_r) - Maximum allowable peak, non-recurrent square wave current (PW=8.3ms).

Note 2. Voltage Regulation (ΔV_Z) - V_Z Measurements are made at 10% and then at 50% of the I_Z max value listed in the electrical characteristics table. The test current time duration for each V_Z measurement is 380 μs ($T_A=25^{\circ}\text{C}$).

DO-201 CASE - MECHANICAL OUTLINE

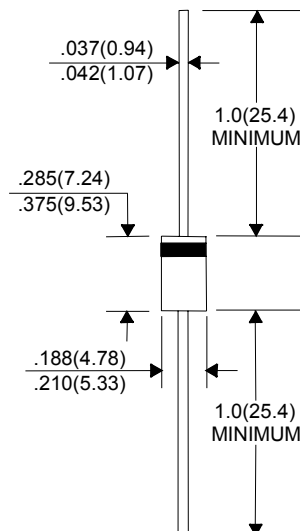

All Dimensions in Inches (mm).

Central
Semiconductor Corp.

145 Adams Ave., Hauppauge, NY 11788 USA
Phone (631) 435-1110 FAX (631) 435-1824

Manufacturers of World Class Discrete Semiconductors
www.centralsemi.com