

2001 64 123f

Messrs :
Date : June 22, 1987
Specification No.: SSE16020

- a) Hybrid voltage regulator module incorporated triple diffused planar transistor
- b) For SMPS of TV power supply
- c) Fixed output voltage
- d) Transfermolded plastic package

1. Voltage sensing
2. Base drive
3. Input
4. Ground
5. Vout adjust

Refer to Fig.1

4. The type number and lot number shall be legitimately marked by white color.

5. Maximum Ratings

Description	Symbol	Unit	Ratings
Maximum Peak Input Voltage	V_{IN}	V	850
Input Current	I_{IN}	A	6 (pulse 12A)
Maximum Power Dissipation	P_D	W	27 ($T_c=100dC$)
Operating Temperature	T_{op}	dC	-20 ~ +125 (T_c)
Storage Temperature	T_{stg}	dC	-30 ~ +125
Junction Temperature of Power Transistor	T_j	dC	+150



6. Electrical Characteristics

Description	Symbol	Test Conditions	Ratings
Sensing Voltage (Fixed Voltge)	V_O	$I_{IN}=7mA$, Test Circuit No.1	$41.8^{+0.5}_{-0.5}V$
Temperature Coefficient of output voltage		$T_c=-20 \sim +100dC$ $I_{IN}=7mA$, Test C.No.1	$^{+2.0}_{-2.0}mV/dC$
Power Transistor	$V_{CE(sat)}$	$I_C=2A$, $I_B=0.4A$	0.4V Max.
↓	h_{FE}	$V_{CE}=4V$, $I_C=1A$	Min. 15 Max. 38
↑	I_{CEX}	$V_{CE}=850V$, $V_{BE}=-1.5V$	1.0mA Max.
↓	$V_{BE(sat)}$	$I_C=2A$, $I_B=0.4A$	1.5V Max
Thermal Resistance	$R_{th(j-c)}$	From junction to metal flange	1.8dC/W
Switching time		Test Circuit No.2	t_s 11.0μsecMax.
			t_f 0.5μsecMax.

Remarks: Recommended case temperature is $T_{op}(T_c)=100dC$ Max.

Suggested Silicone Grease


C746: SHIN-ETSU CHEMICAL INDUSTRY CO., LTD.
 C747: SHIN-ETSU CHEMICAL INDUSTRY CO., LTD.
 YG6260: TOSHIBA SILICONE CO., LTD.
 SC102: TORAY SILICONE CO., LTD.

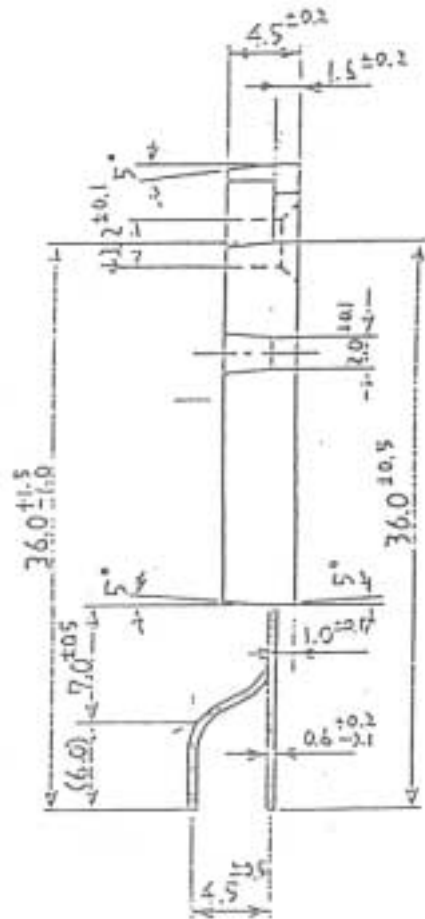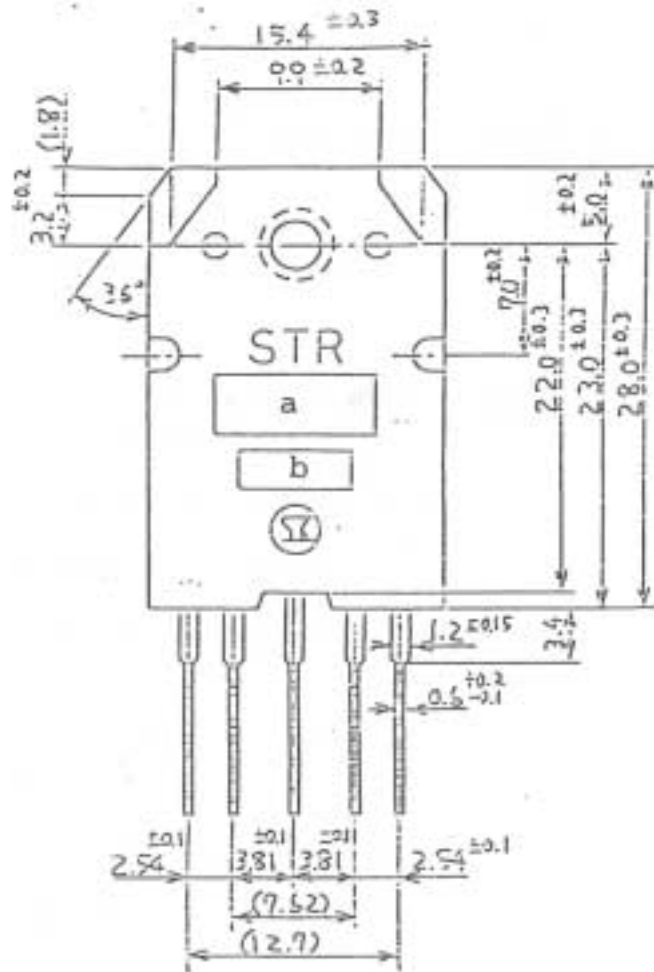

a. Type number 58041

b. Lot number

1st number for year
 2nd number for month
 1-9: Jan.-Sept.
 O : Oct.
 N : Nov.
 D : Dec.
 3rd & 4th number for date

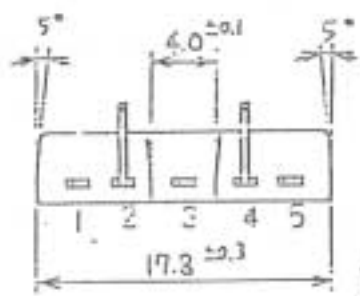

1. Voltage sensing
2. Base drive
3. Input
4. Ground
5. Vout adjust

△	4 版	・	△	製造	承認	Outline Drawings of 2GR Plastic Molded Package LF No.501
△	3 版	・	△	製造	承認	
△	2 版	・	△	製造	承認	
△	1 版	・	△	製造	承認	
製造 図章					設計	4B-E 01244 7/7
サンケン電気株式会社				全線 85・11・24 尺法 2/1	設計	
分装コード					設計	SS E 16020