
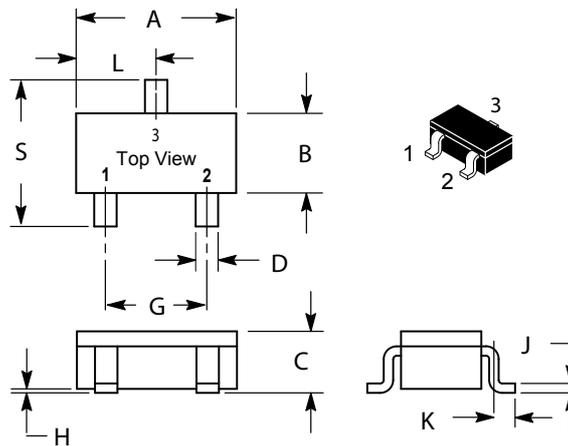


RoHS Compliant Product

A suffix of "-C" specifies halogen & lead-free

Description

The SCS202ND is designed for ultra high speed switching.

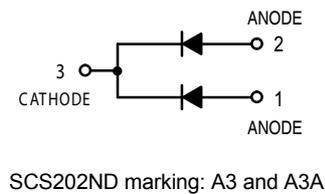

SC-59		
Dim	Min	Max
A	2.70	3.10
B	1.30	1.70
C	1.00	1.30
D	0.35	0.50
G	1.70	2.30
H	0.00	0.10
J	0.10	0.26
K	0.20	0.60
L	1.25	1.65
S	2.25	3.00
All Dimension in mm		

Parameter	Symbol	Ratings	Unit
Junction Temperature	T _j	+150	°C
Storage Temperature	T _{stg}	-55 ~ +150	°C
Peak Reverse Voltage	VRM	80	V
DC Reverse Voltage	VR	80	V
Mean Rectifying Current	I _O	100	mA
Peak Forward Current	I _{FM}	300	mA
Peak Forward Surge Current (1uSec)	I _{FSM}	4	A
Total Power Dissipation	PD	200	mW

Electrical Characteristics (at T_A = 25°C unless otherwise noted)

Parameter	Symbol	Min.	Max.	Unit	Test Conditions
Reverse Voltage	VR	80	-	V	I _R =100uA
Forward Voltage	VF	-	1.2	V	I _F =100mA
Reverse Current	I _R	-	0.1	uA	VR=70V
Capacitance between terminals	CT	-	3.5	pF	VR=6V, f=1MHz
Reverse Recovery Time	T _{rr}	-	4	nS	VR=6V, I _F =5mA

RATING AND CHARACTERISTIC CURVES (SCS202ND)

