

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

FEATURES

- PN Junction Guard Ring for Transient and ESD Protection
- Fast Switching
- Low Turn-on Voltage

MECHANICAL DATE

- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: See Diagrams Below
- Weight: 0.008 grams (approx.)
- Mounting Position: Any


MARKING

LD3 / KL4

PACKAGE INFORMATION


Package	MPQ	Leader Size
SOT-23	3K	7 inch

SOT-23

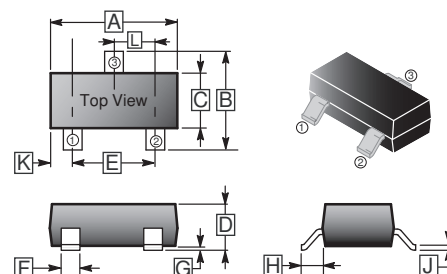

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.80	3.04	G	0.09	0.18
B	2.10	2.55	H	0.45	0.60
C	1.20	1.40	J	0.08	0.177
D	0.89	1.15	K	0.6 REF.	
E	1.78	2.04	L	0.89	1.02
F	0.30	0.50			

Top View



ABSOLUTE MAXIMUM RATINGS ($T_J=25^{\circ}\text{C}$ unless otherwise specified)


Parameter	Symbol	Ratings	Unit
Maximum Reverse Voltage	V_R	30	V
Peak Forward Surge Current@ $t<1\text{s}$	I_{FSM}	600	mA
Maximum Forward Current (DC)	I_F	200	mA
Junction, Storage Temperature	T_J, T_{STG}	125, -55~150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise specified)


Parameters	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Reverse Voltage	$V_{(BR)}$	30	-	-	V	$I_R=10\mu\text{A}$
Maximum Instantaneous Forward Voltage	V_F	-	-	0.24	V	$I_F=0.1\text{mA}$
		-	-	1		$I_F=100\text{mA}$
Maximum Average Reverse Current	I_R	-	-	2	μA	$V_R=25\text{V}$
Reverse Recovery Time	T_{RR}	-	-	5	nS	$I_F=I_R=10\text{mA}$, $I_{R(REC)}=1\text{mA}$
Total Capacitance	C_{tot}	-	-	10	pF	$V_R=1\text{V}$, $f=1\text{MHz}$

RATINGS AND CHARACTERISTIC CURVES


Forward Voltage

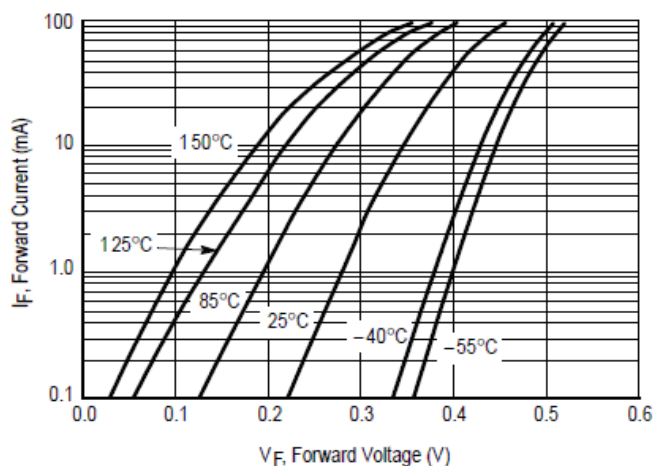


Leakage Current

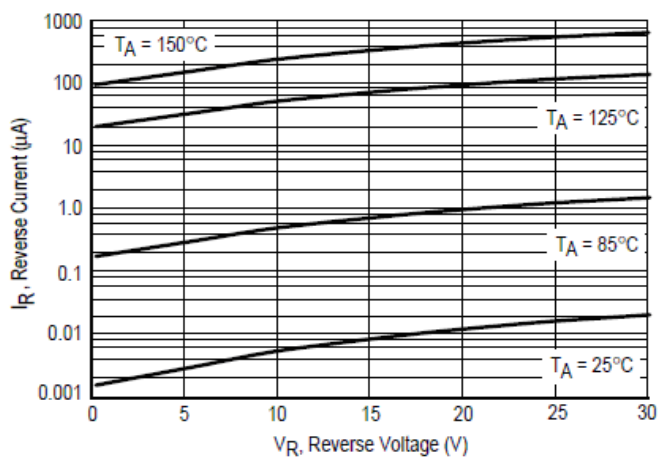

Total Capacitance

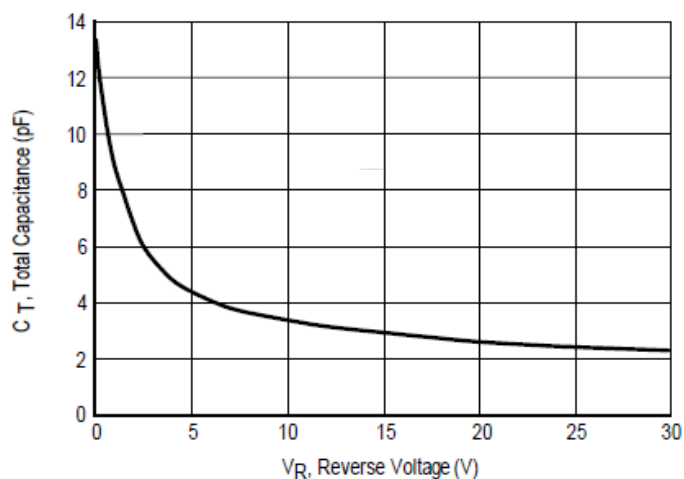

Recovery Time Equivalent Test Circuit

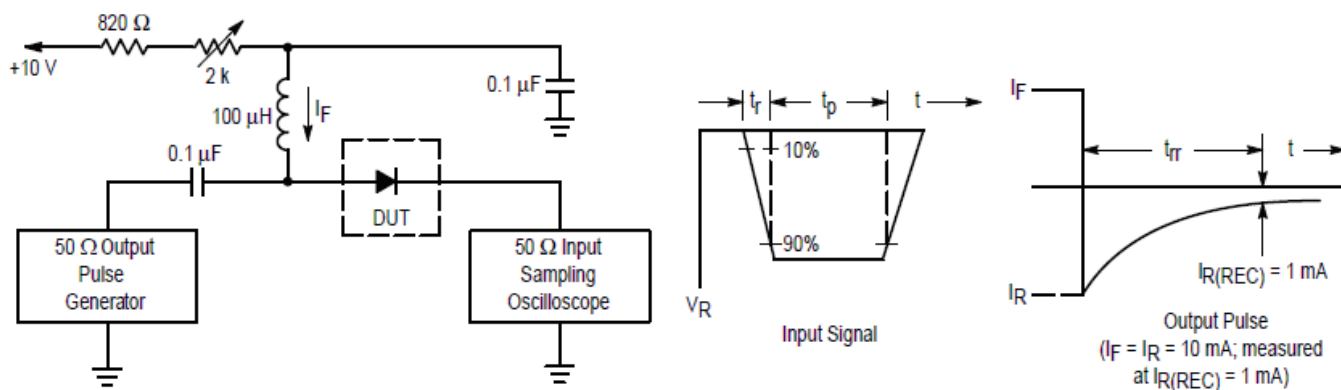

Note:

1. A 2.0 K Ω variable resistor adjusted for a I_F of 10mA.
2. $T_p \gg T_{RR}$
3. Input pulse is adjusted so $I_R(\text{peak})$ is equal to 10mA.