



UTT60N06

Power MOSFET

**N-CHANNEL ENHANCEMENT
MODE POWER MOSFET**



■ DESCRIPTION

The UTC **UTT60N06** is n-channel enhancement mode power field effect transistors with stable off-state characteristics, fast switching speed and low thermal resistance. usually used at telecom and computer applications.

■ FEATURES

- * $R_{DS(ON)} = 18m\Omega @ V_{GS} = 10 V$
- * Fast switching capability
- * Avalanche energy Specified

■ SYMBOL

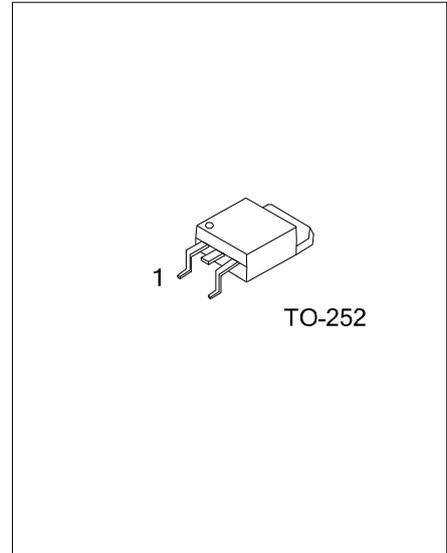

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UTT60N06L-TN3-R	UTT60N06G-TN3-R	TO-252	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

<p>UTT60N06L-TN3-R</p>	<p>(1) R: Tape Reel</p> <p>(2) TN3: TO-252</p> <p>(3) G: Halogen Free, L: Lead Free</p>
------------------------	---

■ ABSOLUTE MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Drain to Source Voltage	V_{DSS}	60	V
Gate to Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	$T_C = 25^\circ\text{C}$	60
		$T_C = 100^\circ\text{C}$	39
Drain Current Pulsed (Note 2)	I_{DM}	120	A
Avalanche Energy	Single Pulsed	E_{AS}	100
Power Dissipation ($T_C=25^\circ\text{C}$)	P_D	83	W
Junction Temperature	T_J	+150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 ~ +150	$^\circ\text{C}$

Note:1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repeativity rating: pulse width limited by junction temperature

■ THERMAL DATA


PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	110	$^\circ\text{C}/\text{W}$
Junction to Case	θ_{JC}	1.8	$^\circ\text{C}/\text{W}$

■ ELECTRICAL CHARACTERISTICS (T_C = 25°C, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} = 0 V, I _D = 250μA	60			V
Drain-Source Leakage Current	I _{DSS}	V _{DS} = 60 V, V _{GS} = 0 V			1	μA
Gate-Source Leakage Current	Forward	V _{GS} = 20V, V _{DS} = 0 V			100	nA
	Reverse	V _{GS} = -20V, V _{DS} = 0 V			-100	nA
ON CHARACTERISTICS						
Gate Threshold Voltage	V _{GS(TH)}	V _{DS} = V _{GS} , I _D = 250μA	2.0		4.0	V
Static Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} = 10 V, I _D = 30 A		14	18	mΩ
DYNAMIC CHARACTERISTICS						
Input Capacitance	C _{ISS}	V _{GS} = 0V, V _{DS} = 25V, f = 1MHz		2000		pF
Output Capacitance	C _{OSS}			400		pF
Reverse Transfer Capacitance	C _{RSS}			115		pF
SWITCHING CHARACTERISTICS						
Turn-On Delay Time	t _{D(ON)}	V _{DD} = 48V, I _D = 60A, R _L = 0.5Ω, V _{GS} = 10V (Note 1, 2)		12	30	ns
Rise Time	t _R			11	30	ns
Turn-Off Delay Time	t _{D(OFF)}			25	50	ns
Fall Time	t _F			15	30	ns
Total Gate Charge	Q _G	V _{DS} = 30V, V _{GS} = 10 V I _D = 60A (Note 1, 2)		39	60	nC
Gate-Source Charge	Q _{GS}			12		nC
Gate-Drain Charge (Miller Charge)	Q _{GD}			10		nC
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS						
Diode Forward Voltage	V _{SD}	V _{GS} = 0 V, I _S = 60A			1.6	V
Continuous Source Current	I _S				60	A
Pulsed Source Current	I _{SM}				120	
Reverse Recovery Time	t _{RR}	I _S = 60A, V _{GS} = 0 V,		60		ns
Reverse Recovery Charge	Q _{RR}	dI _F /dt = 100 A/μs (Note 1)		3.4		μC

Notes: 1. Pulse Test: Pulse Width ≤ 300μs, Duty Cycle ≤ 2%
 2. Essentially independent of operating temperature.

TEST CIRCUITS AND WAVEFORMS

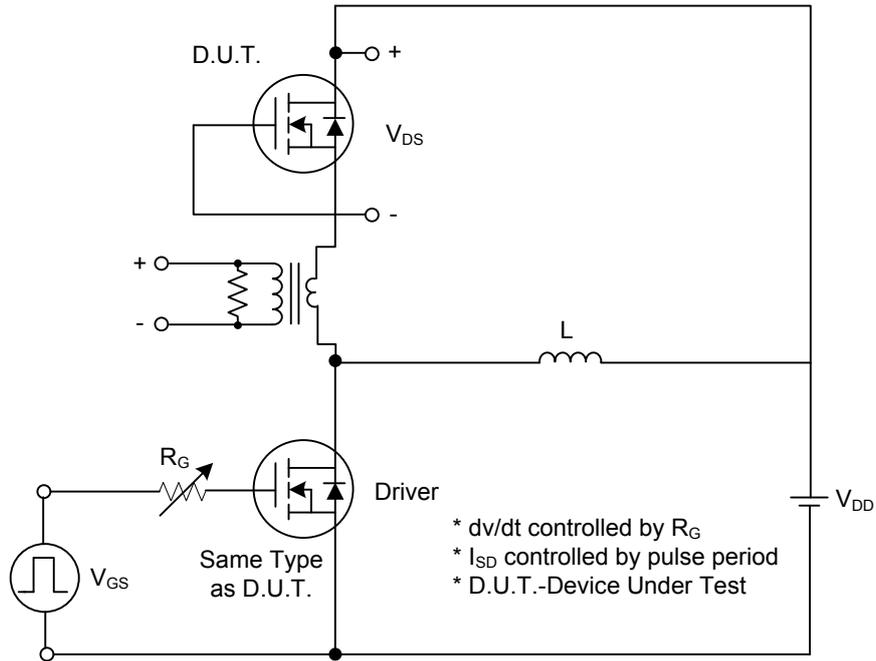


Peak Diode Recovery dv/dt Test Circuit

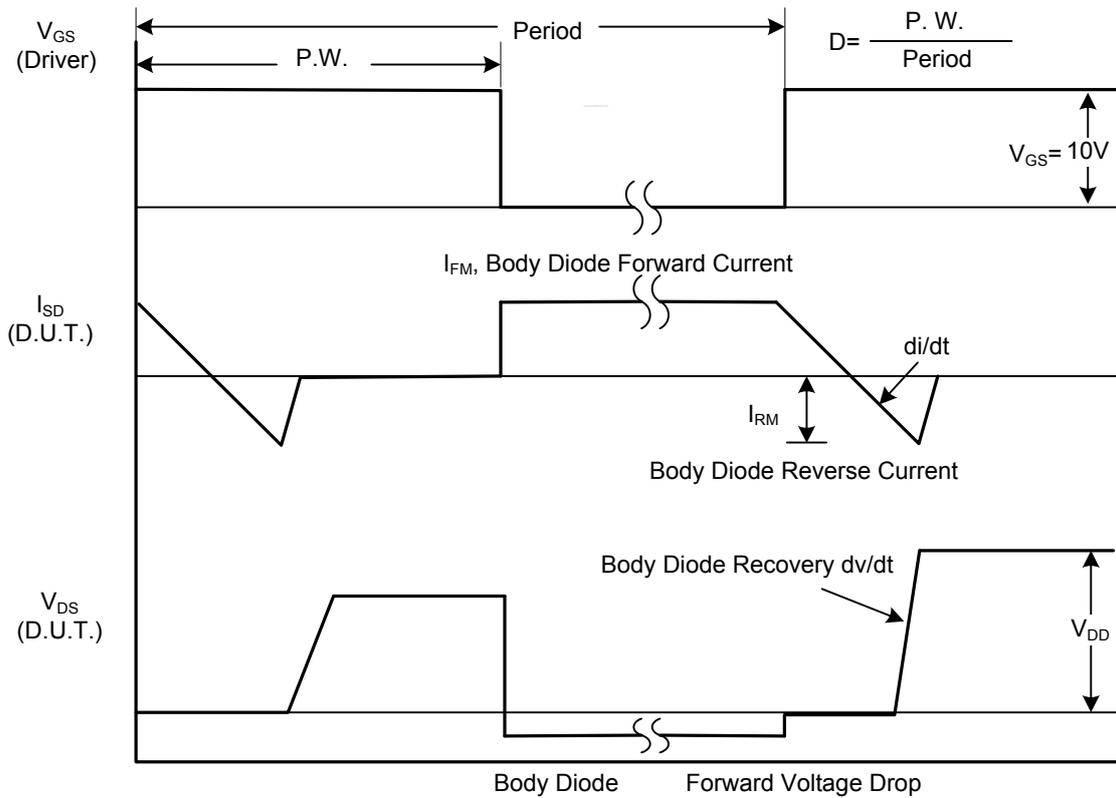


Peak Diode Recovery dv/dt Waveforms


TEST CIRCUITS AND WAVEFORMS (Cont.)

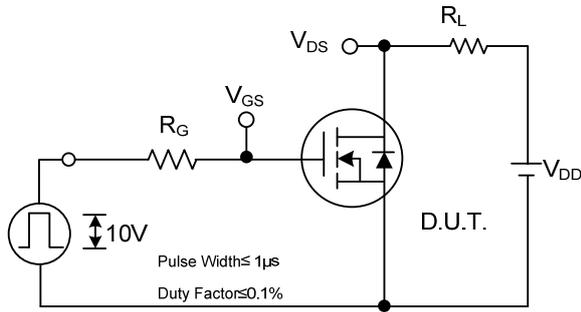


Switching Test Circuit

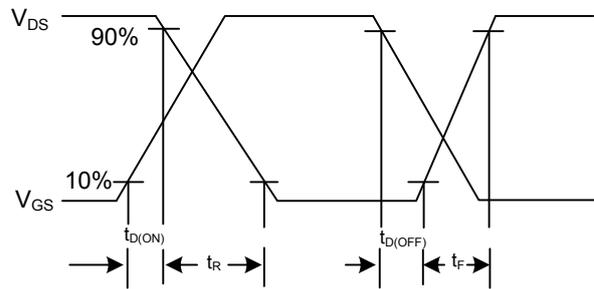


Switching Waveforms

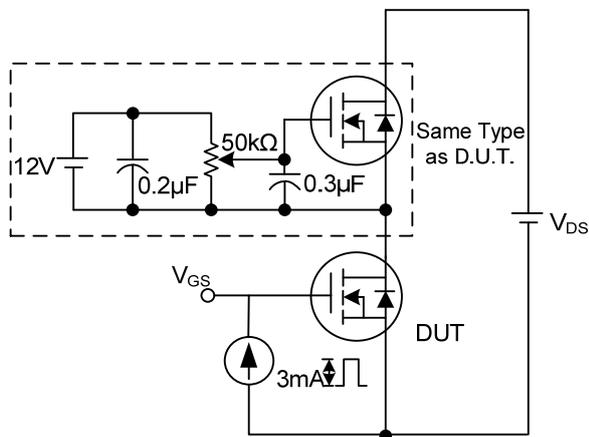


Gate Charge Test Circuit

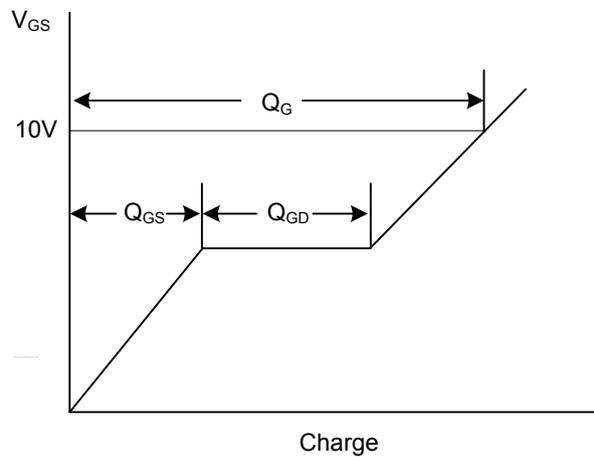

Gate Charge Waveform






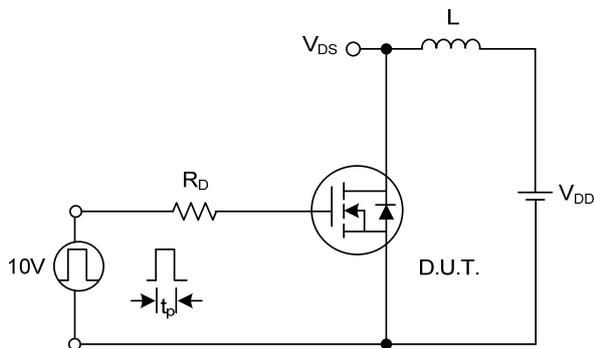


Unclamped Inductive Switching Test Circuit





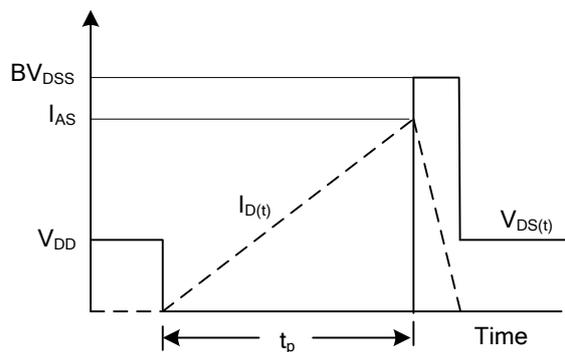


Unclamped Inductive Switching Waveforms

TYPICAL CHARACTERISTICS

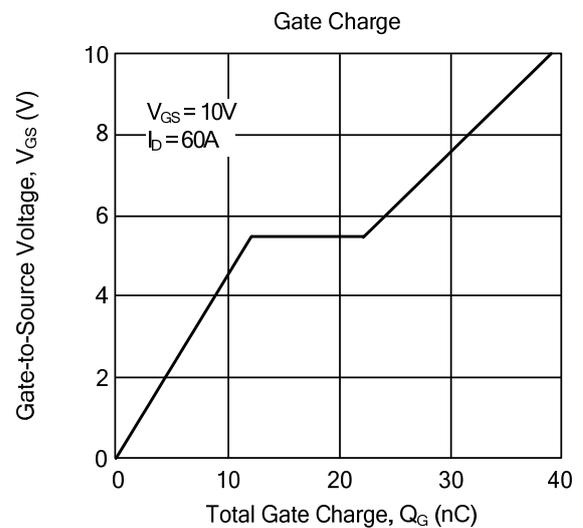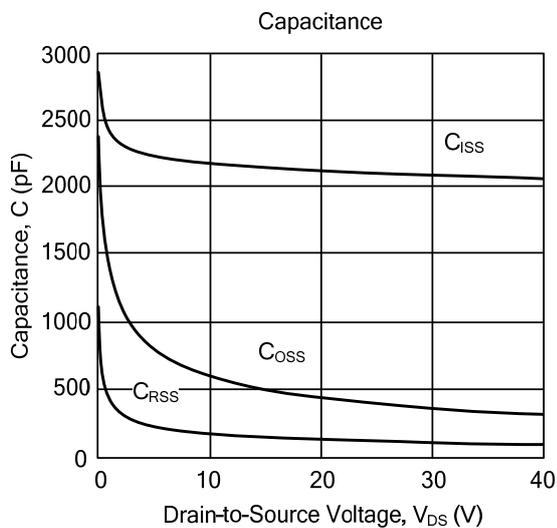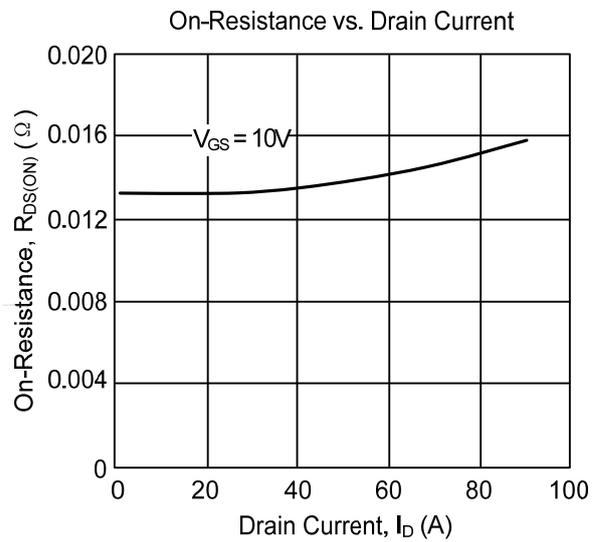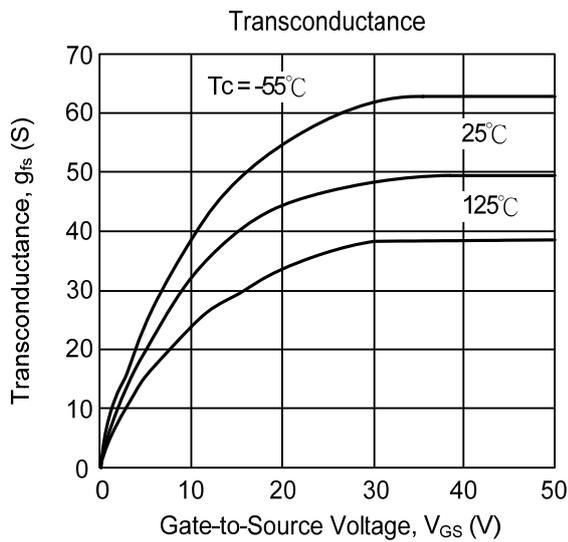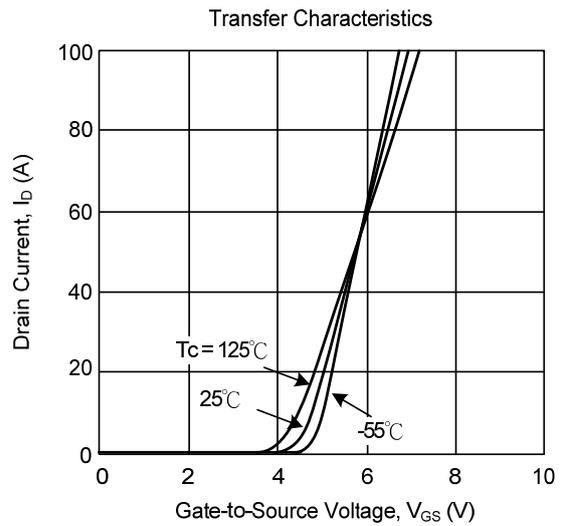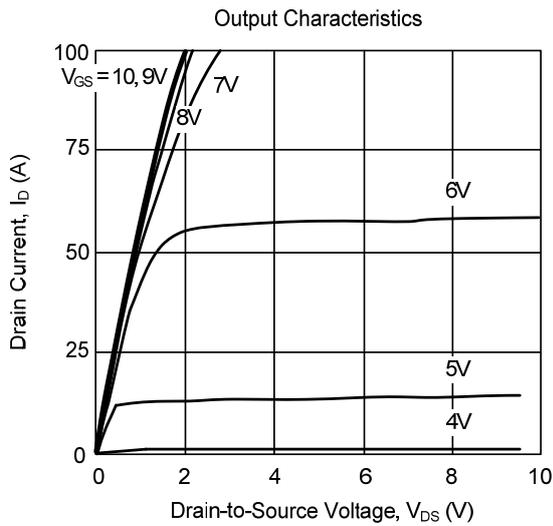

TYPICAL CHARACTERISTICS(Cont.)

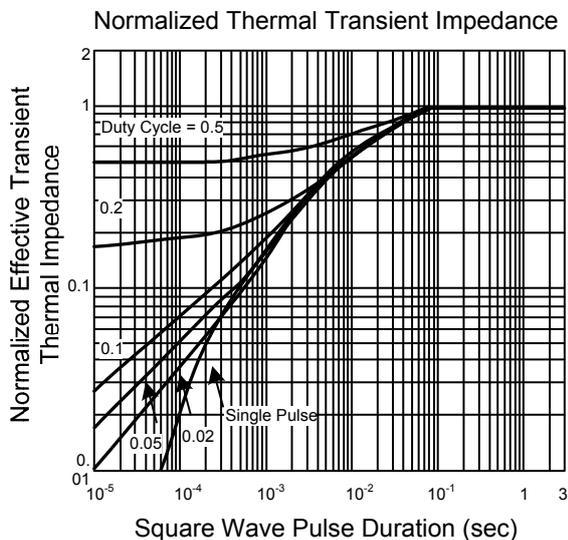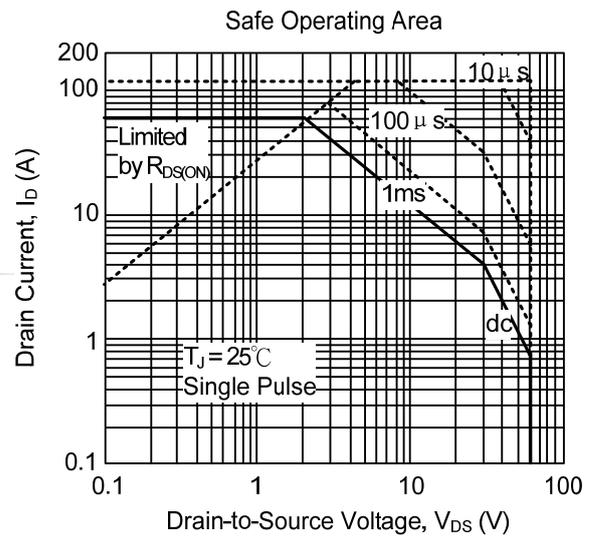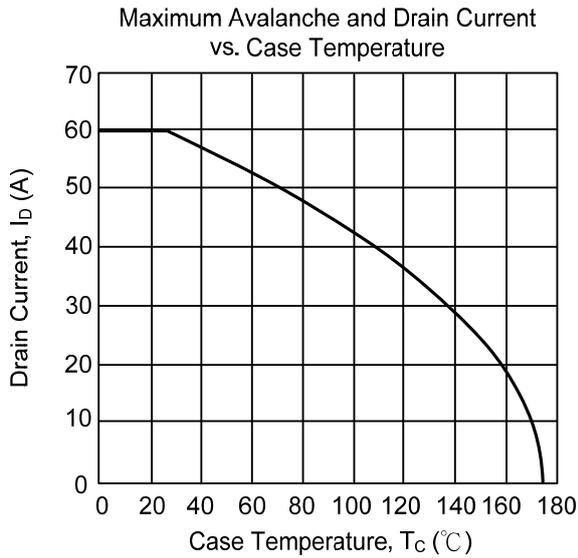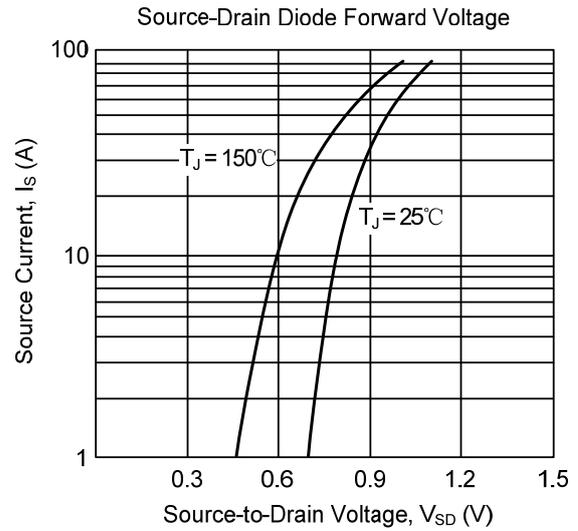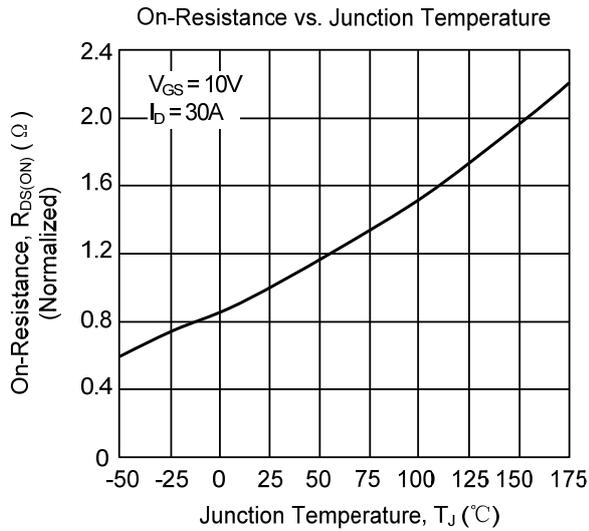

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.