

Small kVA 3 Phase Isolation Transformer**TT2135-TT2141**

VA:	350, 500, 750, 1000, 1500 2000, 3000	Phase:	Three-Phase
Input Voltage:	415 Delta	Frequency:	50 Hz
Out put Voltage:	600Y/347	BIL:	4 kV
Taps:	See wiring diagram	Coils:	Copper
Insula tion Class:	Class F 155° C	Temp Rise:	100° C
Impedan ce:	2.5 - 3.5%		

Open Enclosure

10 Full 10 Year Warranty**Feature Highlights**

10 Year Warranty
UL Listed
CSA Approved

- Copper windings
- 1.5 to 2 week build time
- Solidly fixed terminals with standard combination slotted Robertson head screw connections facilitate wiring.
- Built with heat-proof insulation for compact size and long life.
- Unique bobbin-wound coils for greater efficiency, superior heat evacuation, and compact structure.

Optional Features

- NEMA 4/4x
- Encapsulation
- Other voltages/multiple tap
- Electrostatic shield

Please call us for additional options.


Small kVA 3 Phase Isolation Transformer

TT2135-TT2141

60 Hz


TT2135	350 VA
TT2136	500 VA
TT2137	750 VA
TT2138	1000 VA
TT2139	1500 VA
TT2140	2000 VA
TT2141	3000 VA

Wiring Connection		
Pri. Volts	Connect Taps	Line Leads
415	1- X1 & 2- X2 & 3 - X3	X1, X2, X3
Sec. Volts	Connect Taps	Line Leads
600 (347)	1- H1 & 2- H2 & 3 - H3	H1, H2, H3(H0)

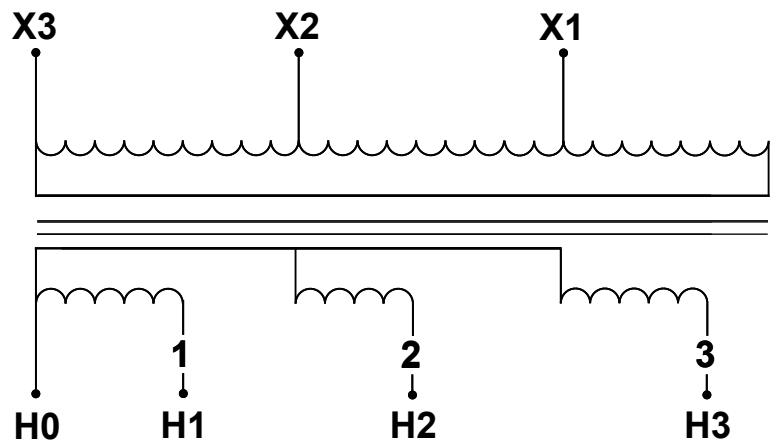

Small kVA 3 Phase Isolation Transformer

TT2135-TT2141

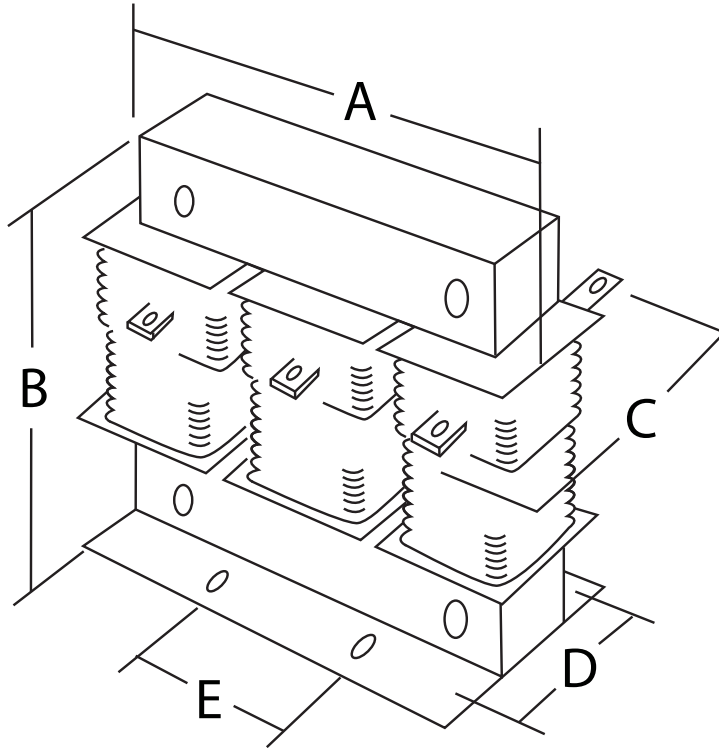

Open Units - Dimension Table

Part # (60 Hz)	VA	A	B	C	D	E	Mounting Holes	Ship Weight (lbs)
TT2135	350	7.2	5.4	3.6	2.58	2.4	0.28 x 0.56	12
TT2136	500	7.2	5.4	3.6	2.58	2.4	0.28 x 0.56	14
TT2137	750	9	6.75	3.9	2.75	3	0.35 x 0.788	23
TT2138	1000	9	6.75	4.1	2.75	3	0.35 x 0.788	26
TT2139	1500	9	6.75	5.4	4.25	3	0.35 x 0.788	40
TT2140	2000	9	6.75	5.55	4.25	3	0.35 x 0.788	46
TT2141	3000	9	6.75	6	4.25	3	0.35 x 0.788	55

Approximate dimensions given in inches.

Note: All dimensions are +/- 0.06 in. except for "C," which is +/- 0.25 in.

Corporate Headquarters: TEMCo – Tower Electric Motor Company 41474 Christy Street Fremont, CA 94538
Inside USA (800) 613-2290 International (510) 490-2187 Fax (510) 490-1507 www.temcoindustrialpower.com