

► **PRODUCTS :** 1-26 BBC


➤ **NO TCU DORTI EE RB TCU DORP**

GNINRU DNA .

➤ **MANTECHNICAL DATA :**

1	Ambient Temperature	-40~+70℃
2	Rated Voltage	250VAC~500VAC
3	Test Voltage	T-T: 1.75Un t: 2s T-C: 2000VAC t: 10s
4	Capacitance Tolerance	J (±5%), K (±10%)
5	Dissipation Factor	tgδ≤0.004 (50Hz, 60 Hz 20℃)
6	Standard	GB3667-97 IEC252-92

➤ **OVERALL AND INSTALLATION:**

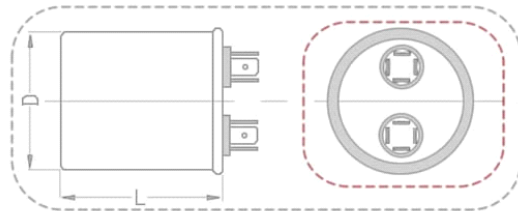

► **ELBATEZ ES AC DNE GATLOV DETAR ECHNAT CAPACLAN MON**

U_R (VAC)	C_R (μF)	Max. Dimensions	
		D	L
370~450	4	45	60
	5		
	8	45	90
	10		
	12		
	15	50	90
	17		
	20		
	25	50	50
	30	50	110
	35		
	40	50	130
	45		
	50	50	140
	55	60	130
	60		
	70	60	150