

# 億力光電股份有限公司

## EVERVISION ELECTRONICS CO., LTD.

### Product Specification For LCD Module

(KVPF-7B-002-16)

**Model NO. : VGG482711-6UFLWE(RoHS)**

**REVISION : 3**

APPROVAL FOR SPECIFICATIONS ONLY

APPROVAL FOR SPECIFICATIONS AND SAMPLE

**CUSTOMER :**

**STD.**

**APPROVED BY :**

### EVERVISION LCM R&D CENTER

**APPROVED BY**

**CHECKED BY**

**PREPARED BY**

*[Handwritten signature]*  
*ZE*  
*[Handwritten signature]*  
*1/13*

*[Stamp]*  
*1/13*

*[Stamp]*  
*[Handwritten signature]*

*[Stamp]*  
*1/13*

**DIRECTOR**

**MANAGER**

**Mechanism Engineer**

**Electronic Engineer**

億力光電股份有限公司總公司  
**EVERVISION ELECTRONICS LTD.**  
 台北縣中和市建一路 186 號 12 樓  
 12F,NO.186, JIAN 1st RD., CHUNG HO CITY,  
 TAIPEI HSIEN, TAIWAN, R.O.C  
 TEL : +886 2 8227-2788  
 FAX : +886 2 8227-2789

億力光電股份有限公司台中分公司  
**EVERVISION ELECTRONICS(T.C) LTD.**  
 台中縣潭子鄉台中加工出口區建國路 19 號  
 NO.19,CHIEN KUO ROAD.T.E.PZ TANTZE  
 427 TAICHUNG HSIEN TAIWAN R.O.C  
 TEL : +886 4 2532-8889  
 FAX : +886 4 2532-6689

東莞莞城德寶電子廠  
**EVERVISION ELECTRONICS(B.V.I) LTD.**  
 廣東省東莞市城區東縱大道天寶路 9 號  
 NO.9,Tian Bao Rd.,Dong Zong St.,Dong Guan City  
 Guang Dong. China.  
 TEL : +86 769 2220 5258  
 FAX : +86 769 2220 7258

勁佳光電(昆山)有限公司  
**EVERVISION ELECTRONICS(KUNSHAN) LTD.**  
 江蘇省昆山市玉山鎮高科技工業園城北路 8 號  
 NO.8,Chengbei Rd., Hi-Tech Industry Park ,  
 Yushan Town , Kunshan City , Jiangsu,China.  
 TEL : +86 512 5778 7288  
 FAX : +86 512 5777 0688

<http://www.evervisionlcd.com>

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	2

## 1. Table of Contents

<b>No.</b>	<b>Contents</b>	<b>Page</b>
1	Table of Contents	2
2	Record of Revisions	3
3	Module Numbering System	4
4	Application	5
5	Features	5
6	General Specifications	5
7	Absolute Maximum Ratings	6
8	Electrical Characteristics	7
9	Block Diagram	9
10	Input / Output Terminals Pin Assignment	10
11	Interface Timing	13
12	Optical Characteristics	22
13	Reliability Test	25
14	Packaging	26
15	Precautions	27
16	Outline Drawing	28
17	Definition of Labels	29
18	Incoming Inspection Standards	31



<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	4

### 3. Module Numbering System

**V G G 4827 11 – 6 U F L W E**

Serial No.:A~Z

Backlight Color:  
**N**:Without Backlight;  
**A**:Amber; **B**:Blue; **G**:Green;  
**L**:Yellow; **O**:Orange; **R**:Red;  
**W**:White; **Y**:YellowGreen;  
**X**:Others

Backlight Type:  
**N**:Without Backlight; **E**:EL; **F**:CCFL;  
**L**:General LED; **H**:High NTSC LED ;  
**R**:RGB LED; **X**:Others

LCD Model:  
**A**:ASTN; **B**:STN Blue; **C**:CSTN; **D**:DSTN;  
**F**:TFT; **G**:STN Gray; **H**:HTN; **I**:IBN;  
**K**:Black Mask TN **L**:LTPS; **M**:MVA;  
**N**:others; **O**:OLED; **P**:PLED; **S**:IPS;  
**T**:TN; **U**:FSC TN; **W**:FSTN Black/white;  
**X**:FFSTN; **Y**:STN Yellow;

LCD Type:  
**R**: Reflective/Positive;  
**S** : Reflective/Negative ;  
**F** : Transflective/Positive ;  
**G**: Transflective/Negative ;  
**U**: Transmissive/Positive ;  
**T**: Transmissive/Negative ; **N**:Others

Temperature Range & View Direction:  
General Purpose : **1**:6H **2**:12H **3**:3H **4**:9H **5**:Others  
High Performance: **6**:6H **7**:12H **8**:3H **9**:9H **0**:Others

STD Product Serial No.: 01~99  
Customer Made Serial No.: A1,A2...A9,B1,B2...B9,C1..

Display Function:  
Segment Number / Characters Lines / Column and Row Dots  
/ Length \* Width of Other

Display Type:  
**C**:Character Type; **G**:Graphic Type; **S**:Segment Type; **O**:Other

Package Type:  
**B**:COB; **F**:COF; **G**:COG; **H**:Heat Seal; **S**:SMT; **T**:TAB; **O**:Others

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	5

#### 4. Application

This specification is applied to the 4.3 inch supported TFT-LCD module With projected capacitive touch (PCT) and can display true 16.7M colors (8 bit/ color). The module is designed for PMP, GPS, DMB, other electronic products which require flat panel display of digital signal interface. The model is composed of a TFT LCD panel, a driver circuit and a back-light system.

#### 5. Features

- WQVGA (480×272 pixels) resolution.
- 8 bit MCU interface.
- LCD Controller :SSD1963
- Projected Capacitive Touch
  - I<sup>2</sup>C Interface
  - Multi Touch (Ten points)

#### 6. General Specifications

Item	Specifications	Unit
Screen Size	4.3 (Diagonal)	inch
Display Format	480RGB(H)×272(V)	dot
Active Area	95.04(H)×53.856(V)	mm
PIXEL Pitch	0.198(H)×0.198(V)	mm
Pixel Configuration	RGB Vertical Stripe	-
Display Mode	TN Type Transmissive Mode Normally White	-
Surface Treatment	Clear(7H)	-
Viewing Direction	6 O'clock (The Gray Inversion will appear at this direction)	-
Outline Dimension	105.5(W)×67.2(H)×9.6(D)	mm
Weight	78	g
RoHS Compliance	Evervision certifies this product to be in compliance with European Union Directive 2002/95/EC on the restriction of certain hazardous substances in electrical and electronic equipment.	-

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	6

## 7. Absolute Maximum Ratings

### 7.1 Absolute Ratings of Environment

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Storage Temperature	T <sub>ST</sub>	-30	+80	°C	(1)(2)
Operating Temperature	T <sub>OP</sub>	-20	+70	°C	(1)(2)

Note1: Background color changes slightly depending on ambient temperature.

This phenomenon is reversible.

Note2: Please refer to item of RELIABILITY.

### 7.2 Electrical Absolute Ratings

#### 7.2.1 TFT-LCD Module

(Ta=25±2°C, VSS=0V)

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Digital Power Supply Voltage	VCC	-0.5	4.6	V	-

#### 7.2.2 LED Driver Absolute Maximum Ratings

(Ta=25±2°C)

Item	Symbol	Value		Unit	Note
		Min.	Max.		
LED Driver For EN	EN	-	6	V	(1)

Note (1) Permanent damage to the device may occur if maximum values are exceeded or reverse voltage is loaded.

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	7

## 8. Electrical Characteristics

### 8.1 TFT-LCD Module


(Ta=25±2°C)

Item	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
Digital Power Supply Voltage	VCC	3.0	3.3	3.6	V	-
Input High Threshold Voltage	VIH	0.7VCC	-	VCC	V	-
Input Low Threshold Voltage	VIL	0	-	0.3 VCC	V	-
VSYNC Frequency	F <sub>v</sub>	-	60	-	Hz	-
Digital Current	ICC	-	250	350	mA	-
Power Consumption	PC	-	0.825	1.155	W	(1)
Pixel Clock	PCLK	-	9.0	15.0	MHz	-

Note (1) The specified power consumption is under the conditions at VCC = 3.3V,

FV=60Hz, DCLK=9.0 MHz, whereas a power dissipation check Pattern below is displayed.

Black Pattern / 0 Gray



Active Area

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	8

## 8.2 LED Driver Unit

Item	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
EN Voltage High	VIH	2.0	-	3.6	V	-
EN Voltage Low	VIL	0	-	0.8	V	-
LED Life Time(25°C)	-	20000	30000	-	hr	-

Note (1) The driving design of backlight unit is dependent on serial consideration of 10 LEDs.

(2) The LED life time is defined as the module brightness decrease to 50%, original brightness at Ta=25°C , I<sub>LED</sub> =20mA.


## 8.3 Projected Capacitive Touch

Item	Value			Unit	Note
	Min.	Typ.	Max.		
Operating Voltage	3.0	3.3	3.6	V	-
Power Supply Current	-	10.0	14.0	mA	(1)
Power Consumption	-	33.3	46.2	mW	@3.3V
Interface	I <sup>2</sup> C				-
Function	Multi Touch				-

Note (1) This test condition is touched with 10 points.

**9. Block Diagram**

**TFT-LCD Module with Backlight Unit**

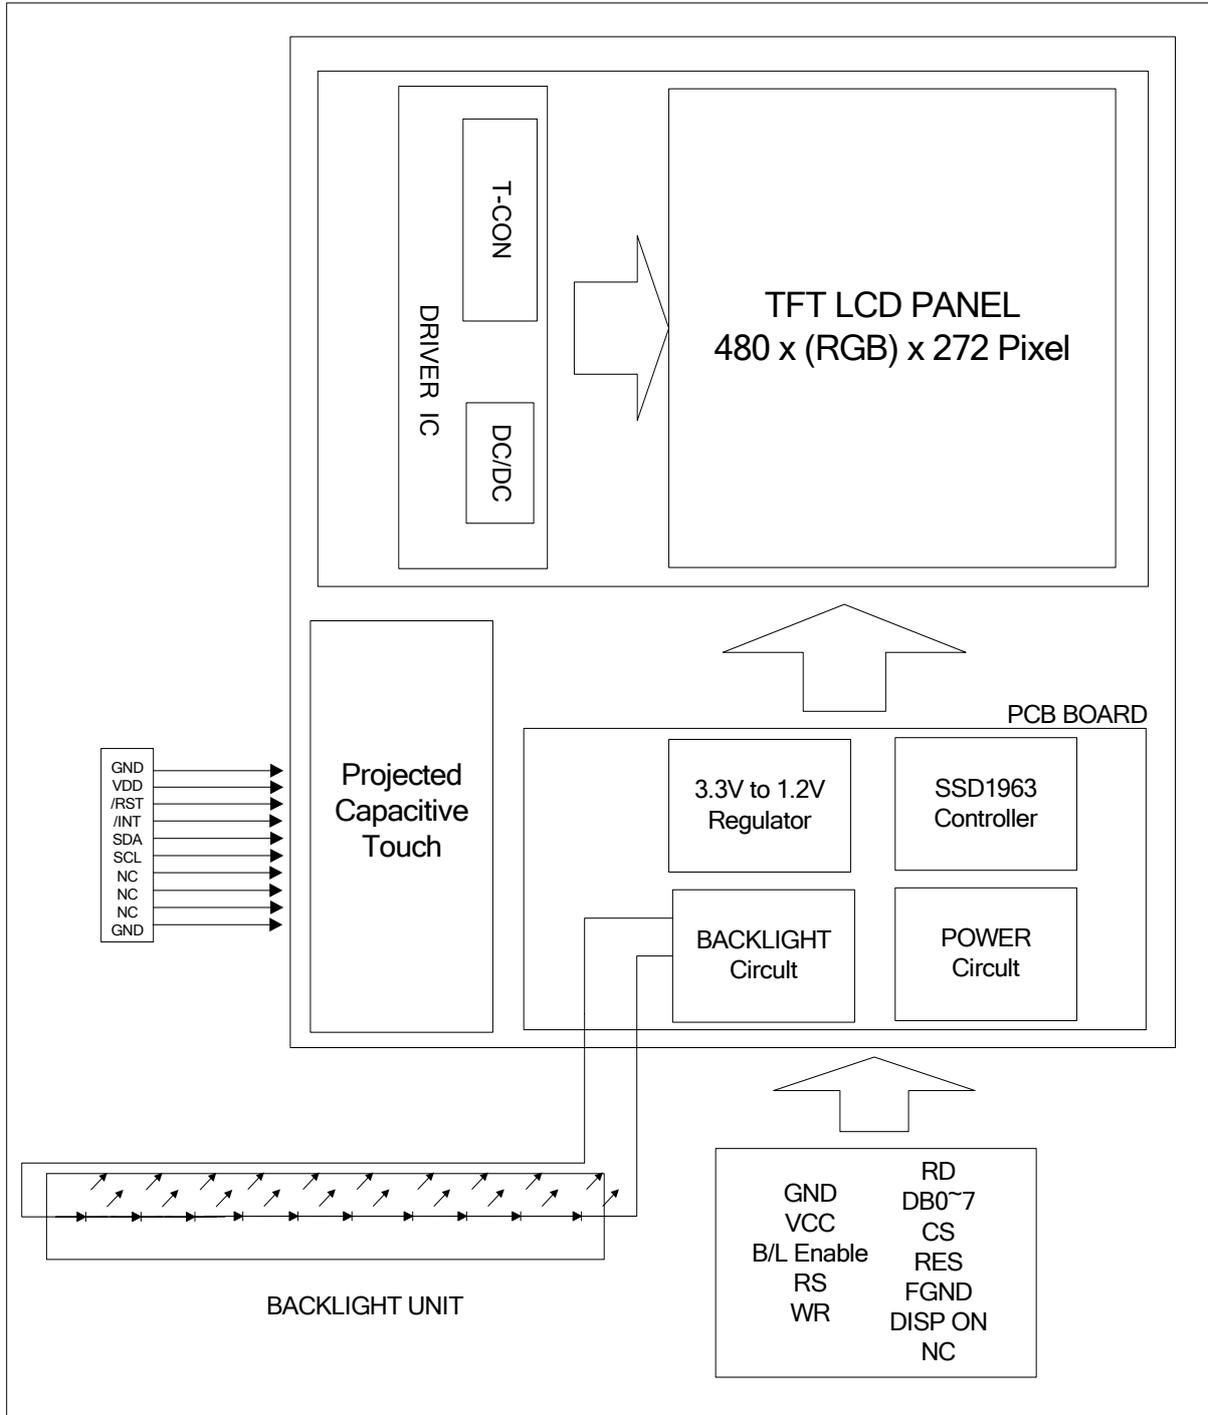

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	10

## 10. Input / Output Terminals Pin Assignment

### 10.1 TFT-LCD Module

Recommendation CN:CF25201D0R0-10

Pin No.	Symbol	Description
1	GND	Ground
2	VCC	POWER SUPPLY(+3.3V)
3	B/L ENABLE	Backlight control
4	RS	Data/Command select
5	WR	8080 mode: WR# (write strobe signal)
6	RD	8080 mode: RD# (read strobe signal)
7	DB0	Data bus
8	DB1	Data bus
9	DB2	Data bus
10	DB3	Data bus
11	DB4	Data bus
12	DB5	Data bus
13	DB6	Data bus
14	DB7	Data bus
15	CS	Chip select
16	RES	RESET
17	NC	NC
18	FGND	Ground
19	DISP ON	Display ON/OFF Signal
20	NC	NC

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	11

## 10.2 Projected Capacitive Touch

Connector: CVILUX CF25101D0R0-05

Pin No.	Symbol	I/O	Description
1	GND	I	System ground.
2	VDD	I	+3.3V power supply.
3	/RST	I	External reset signal, active low.
4	/INT	O	Interrupt signal, active low, asserted to request Host start a new transaction.
5	SDA	I/O	I <sup>2</sup> C data signal.
6	SCL	I	I <sup>2</sup> C clock signal.
7	NC	-	Not Connection
8	NC	-	Not Connection
9	NC	-	Not Connection
10	GND	I	System ground.

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	12

### 10.3 Pixel Data Format


8080 support 8-bit. Depending on the width of the data bus, the display data are packed into the data bus in different ways

Table: Pixel Data Format

Interface Cycle

Interface	Cycle	D[23]	D[22]	D[21]	D[20]	D[19]	D[18]	D[17]	D[16]	D[15]	D[14]	D[13]	D[12]	D[11]	D[10]	D[9]	D[8]	D[7]	D[6]	D[5]	D[4]	D[3]	D[2]	D[1]	D[0]	
8 bits	1 <sup>st</sup>																	R7	R6	R5	R4	R3	R2	R1	R0	
	2 <sup>nd</sup>																		G7	G6	G5	G4	G3	G2	G1	G0
	3 <sup>rd</sup>																		B7	B6	B5	B4	B3	B2	B1	B0

### 10.4 Power ON/OFF Sequence

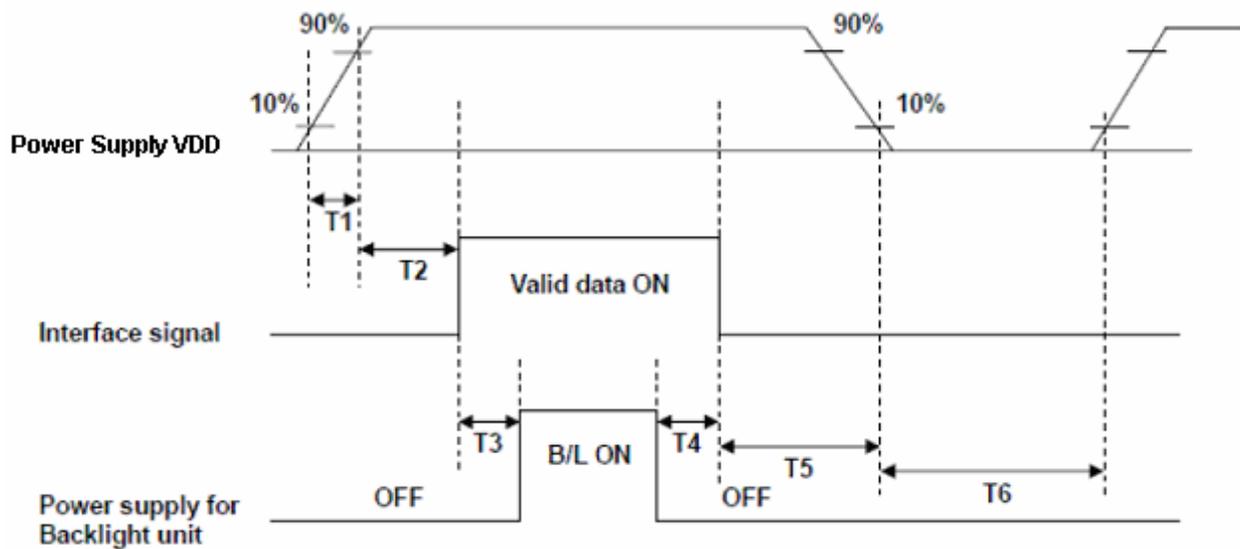

POWER SEQUENCE TABLE

Parameter	Value			Units
	Min.	Typ	Max.	
T1	1	-	2	ms
T2	101	-	-	ms
T3	34	-	-	ms
T4	34	-	-	ms
T5	34	-	-	ms
T6	1000	-	-	ms

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	13

## 11. Interface Timing

### 11.1 Timing Requirement

#### Clock Timing

**Table 11-1 :Clock Input Requirements for CLK (PLL-bypass)**

Symbol	Parameter	Min	Max	Units
$F_{CLK}$	Input Clock Frequency (CLK)		110	MHz
$T_{CLK}$	Input Clock period (CLK)	$1/f_{CLK}$		ns

**Table 11-2 : Clock Input Requirements for CLK**

Symbol	Parameter	Min	Max	Units
$F_{CLK}$	Input Clock Frequency (CLK)	2.5	50	MHz
$T_{CLK}$	Input Clock period (CLK)	$1/f_{CLK}$		ns

**Table 11-3 : Clock Input Requirements for crystal oscillator XTAL**

Symbol	Parameter	Min	Max	Units
$F_{XTAL}$	Input Clock Frequency	2.5	10	MHz
$T_{XTAL}$	Input Clock period	$1/f_{XTAL}$		ns


#### Parallel 8080-series Interface Timing

**Table : Parallel 8080-series Interface Timing Characteristics**


Symbol	Parameter	Min	Typ	Max	Unit
$f_{MCLK}$	System Clock Frequency*	1	-	110	MHz
$t_{MCLK}$	System Clock Period*	$1/f_{MCLK}$	-	-	ns
$t_{PWCSL}$	Control Pulse High Width	Write	13	$1.5 * t_{MCLK}$	- ns
		Read	30	$3.5 * t_{MCLK}$	
$t_{PWCSH}$	Control Pulse Low Width	Write (next write cycle)	13	$1.5 * t_{MCLK}$	- ns
		Write (next read cycle)	80	$9 * t_{MCLK}$	
		Read	80	$9 * t_{MCLK}$	
$t_{AS}$	Address Setup Time	1	-	-	ns
$t_{AH}$	Address Hold Time	2	-	-	ns
$t_{DSW}$	Write Data Setup Time	4	-	-	ns
$t_{DHW}$	Write Data Hold Time	1	-	-	ns
$t_{PWLW}$	Write Low Time	12	-	-	ns
$t_{DHR}$	Read Data Hold Time	1	-	-	ns
$t_{ACC}$	Access Time	32	-	-	ns
$t_{PWLr}$	Read Low Time	36	-	-	ns
$t_R$	Rise Time	-	-	0.5	ns
$t_F$	Fall Time	-	-	0.5	ns
$t_{CS}$	Chip select setup time	2	-	-	ns
$t_{CSH}$	Chip select hold time to read signal	3	-	-	ns

\* System Clock denotes external input clock (PLL-bypass) or internal generated clock (PLL-enabled)

Parallel 8080-series Interface Timing Diagram (Write Cycle)

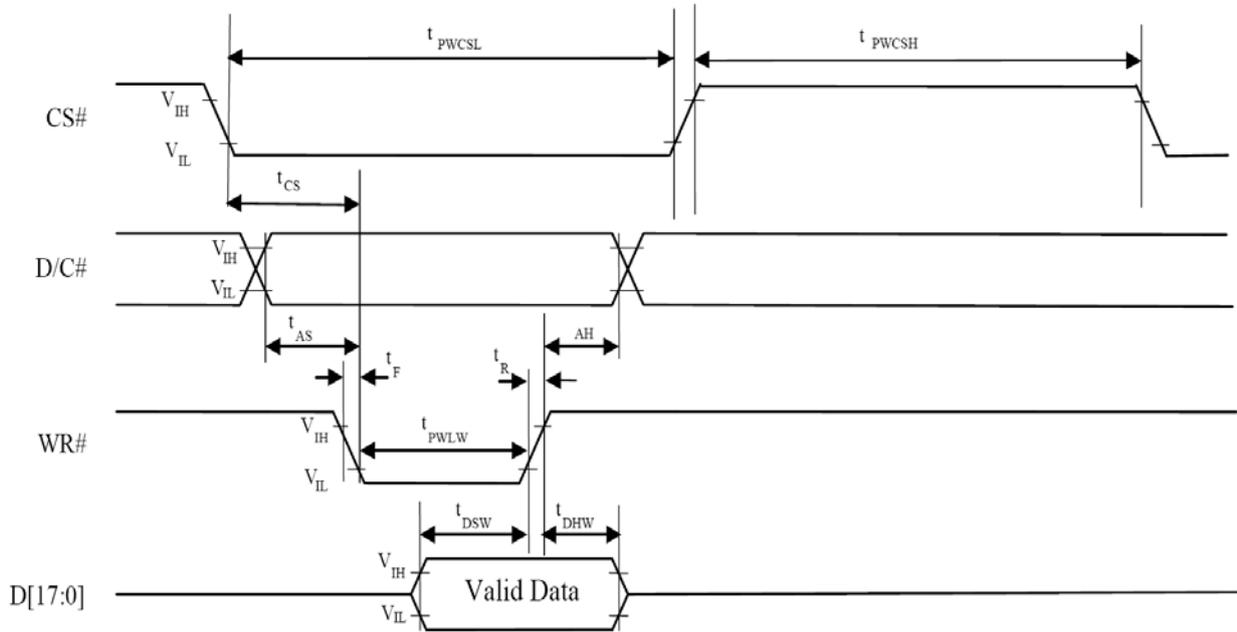


Parallel 8080-series Interface Timing Diagram (Read Cycle)

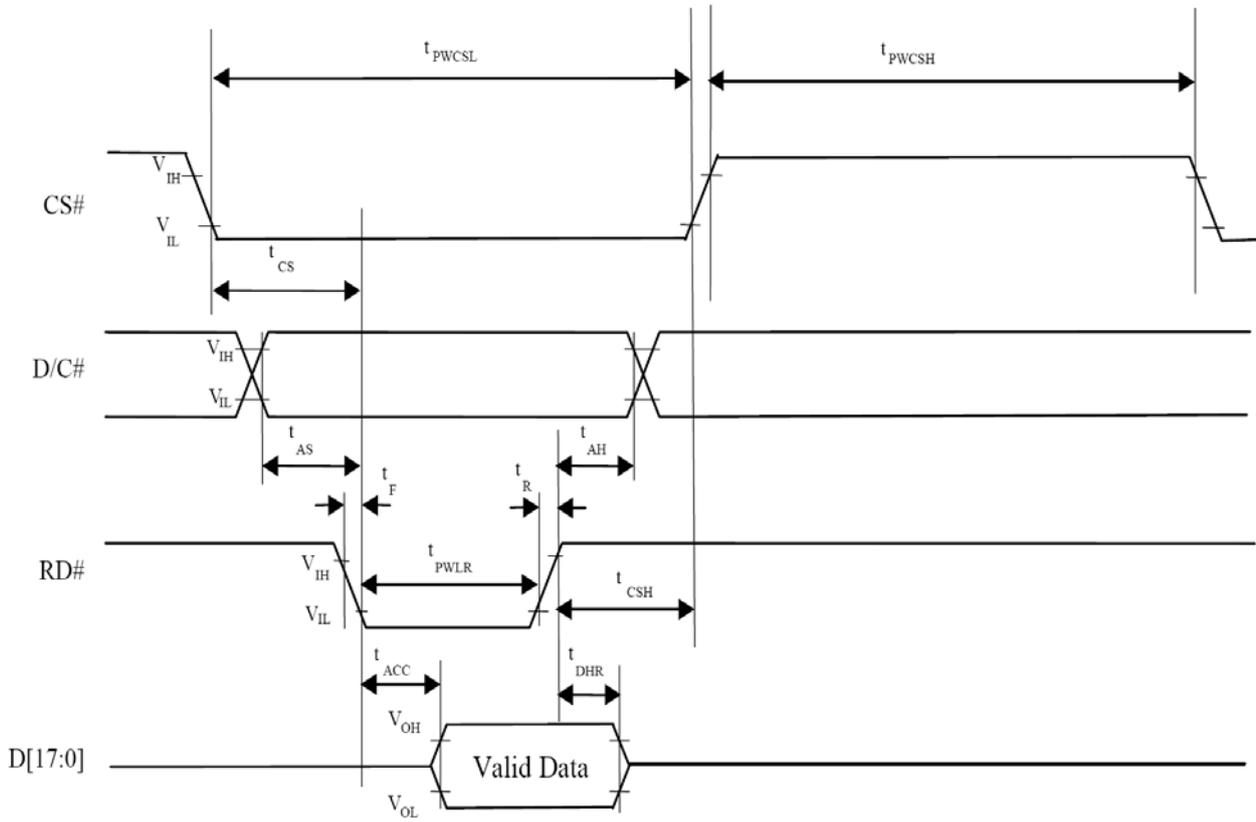


## 11.2 Timing Requirement of Projected Capacitive Touch

### 11.2.1 I2C Data Transfer Format

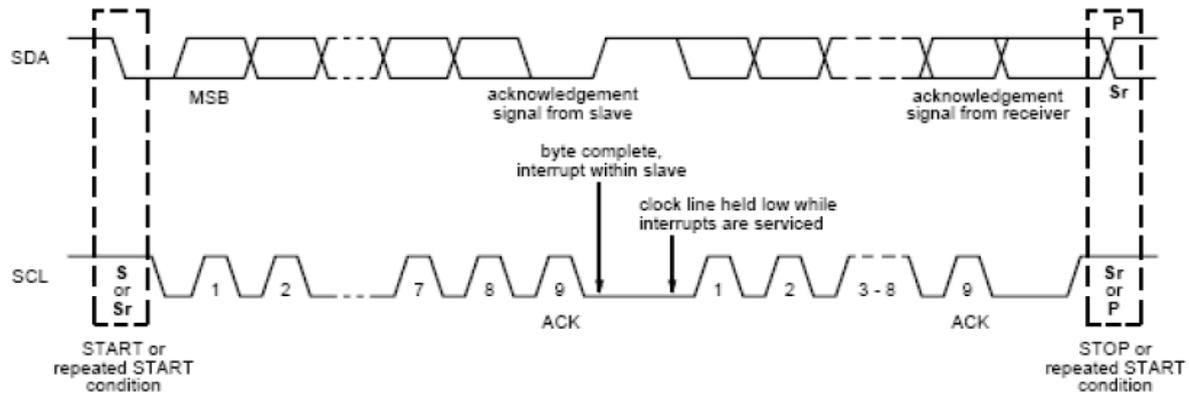


Mnemonics	Description
S	I <sup>2</sup> C Start or I <sup>2</sup> C Restart
A[6:0]	Slave Address = 0x70
W	1'b0: Write
R	1'b1: Read
C	ACK
P	STOP: the indicate the end of a packet (if this bit is missing, S will indicate the end of the current packet and the beginning of the next packet)


#### Write N bytes to I2C slave

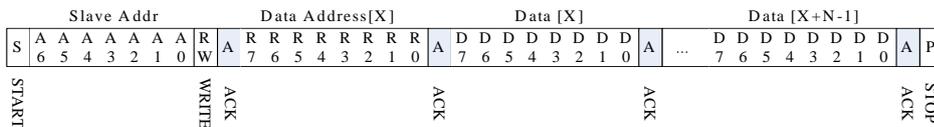

#### Set Data Address

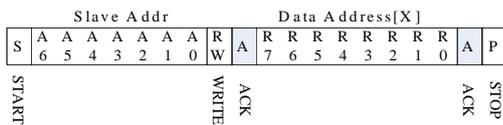

#### Read X bytes from I<sup>2</sup>C Slave

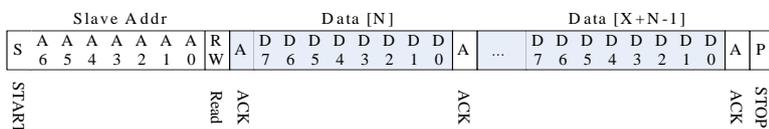



<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	18

Op,09h	TOUCH2_YH	2 <sup>nd</sup> Event Flag		2 <sup>nd</sup> Touch Y Position[11:8]	R
Op,0Ah	TOUCH2_YL	2 <sup>nd</sup> touch Y Position[7:0]			R
Op,0Bh	TOUCH2_XH	2 <sup>nd</sup> Touch ID[3:0]		2 <sup>nd</sup> Touch X Position[11:8]	R
Op,0Ch	TOUCH2_XL	2 <sup>nd</sup> Touch X Position[7:0]			R
Op,0Dh	Reserved				R
Op,0Eh	Reserved				R
Op,0Fh	TOUCH3_YH	3 <sup>rd</sup> Event Flag		3 <sup>rd</sup> Touch Y Position[11:8]	R
Op,10h	TOUCH3_YL	3 <sup>rd</sup> Touch Y Position[7:0]			R
Op,11h	TOUCH3_XH	3 <sup>rd</sup> Touch ID[3:0]		3 <sup>rd</sup> Touch X Position[11:8]	R
Op,12h	TOUCH3_XL	3 <sup>rd</sup> Touch X Position[7:0]			R
Op,13h	Reserved				R
Op,14h	Reserved				R
Op,15h	TOUCH4_YH	4 <sup>th</sup> Event Flag		4 <sup>th</sup> Touch Y Position[11:8]	R
Op,16h	TOUCH4_YL	4 <sup>th</sup> Touch Y Position[7:0]			R
Op,17h	TOUCH4_XH	4 <sup>th</sup> Touch ID[3:0]		4 <sup>th</sup> Touch X Position[11:8]	R
Op,18h	TOUCH4_XL	4 <sup>th</sup> Touch X Position[7:0]			R
Op,19h	Reserved				R
Op,1Ah	Reserved				R
Op,1Bh	TOUCH5_YH	5 <sup>th</sup> Event Flag		5 <sup>th</sup> Touch Y Position[11:8]	R
Op,1Ch	TOUCH5_YL	5 <sup>th</sup> Touch Y Position[7:0]			R
Op,1Dh	TOUCH5_XH	5 <sup>th</sup> Touch ID[3:0]		5 <sup>th</sup> Touch X Position[11:8]	R
Op,1Eh	TOUCH5_XL	5 <sup>th</sup> Touch X Position[7:0]			R
Op,1Fh	Reserved				R
Op,20h	Reserved				R
Op,21h	TOUCH6_YH	6 <sup>th</sup> Event Flag		6 <sup>th</sup> Touch Y Position[11:8]	R
Op,22h	TOUCH6_YL	6 <sup>th</sup> Touch Y Position[7:0]			R
Op,23h	TOUCH6_XH	6 <sup>th</sup> Touch ID[3:0]		6 <sup>th</sup> Touch	R

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	19

			X Position[11:8]	
Op,24h	TOUCH6_XL	6 <sup>th</sup> Touch X Position[7:0]		R
Op,25h	Reserved			R
Op,26h	Reserved			R
Op,27h	TOUCH7_YH	7 <sup>th</sup> Event Flag	7 <sup>th</sup> Touch Y Position[11:8]	R
Op,28h	TOUCH7_YL	7 <sup>th</sup> Touch Y Position[7:0]		R
Op,29h	TOUCH7_XH	7 <sup>th</sup> Touch ID[3:0]	7 <sup>th</sup> Touch X Position[11:8]	R
Op,2Ah	TOUCH7_XL	7 <sup>th</sup> Touch X Position[7:0]		R
Op,2Bh	Reserved			R
Op,2Ch	Reserved			R
Op,2Dh	TOUCH8_YH	8 <sup>th</sup> Event Flag	8 <sup>th</sup> Touch Y Position[11:8]	R
Op,2Eh	TOUCH8_YL	8 <sup>th</sup> Touch Y Position[7:0]		R
Op,2Fh	TOUCH8_XH	8 <sup>th</sup> Touch ID[3:0]	8 <sup>th</sup> Touch X Position[11:8]	R
Op,30h	TOUCH8_XL	8 <sup>th</sup> Touch X Position[7:0]		R
Op,31h	Reserved			R
Op,32h	Reserved			R
Op,33h	TOUCH9_YH	9 <sup>th</sup> Event Flag	9 <sup>th</sup> Touch Y Position[11:8]	R
Op,34h	TOUCH9_YL	9 <sup>th</sup> Touch Y Position[7:0]		R
Op,35h	TOUCH9_XH	9 <sup>th</sup> Touch ID[3:0]	9 <sup>th</sup> Touch X Position[11:8]	R
Op,36h	TOUCH9_XL	9 <sup>th</sup> Touch X Position[7:0]		R
Op,37h	Reserved			R
Op,38h	Reserved			R
Op,39h	TOUCH10_YH	10 <sup>th</sup> Event Flag	10 <sup>th</sup> Touch Y Position[11:8]	R
Op,3Ah	TOUCH10_YL	10 <sup>th</sup> Touch Y Position[7:0]		R
Op,3Bh	TOUCH10_XH	10 <sup>th</sup> Touch ID[3:0]	10 <sup>th</sup> Touch X Position[11:8]	R
Op,3Ch	TOUCH10_XL	10 <sup>th</sup> Touch X Position[7:0]		R
Op,3Dh	Reserved			R
Op,3Eh	Reserved			R

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	20

### 11.2.5 DEVICE\_MODE

This register is the device mode register, configure it to determine the current mode of the chip.

Address	Bit Address	Register Name	Description
Op,00h	6:4	Device Mode [2:0]	000b Normal operating Mode 001b System Information Mode (Reserved) 100b Test Mode – read raw data (Reserved)

### 11.2.6 TD\_STATUS

This register is the Touch Data status register.

Address	Bit Address	Register Name	Description
Op,02h	3:0	Number of touch points[3:0]	How many points detected. 1-10 is valid.

### 11.2.7 TOUCHn\_YH (n:1-10)

This register describes MSB of the Y coordinate of the nth touch point and the corresponding event flag.

Address	Bit Address	Register Name	Description
Op,03h ~ Op,39h	7:6	Event Flag	00b: Put Down 01b: Put Up 10b: Contact 11b: No event
	5:4		Reserved
	3:0	Touch Y Position [11:8]	MSB of Touch Y Position in pixels

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	21

### 11.2.8 TOUCHn\_YL (n:1-10)

This register describes LSB of the Y coordinate of the nth touch point.

Address	Bit Address	Register Name	Description
Op,04h ~ Op,3Ah	7:0	Touch Y Position [7:0]	LSB of the Touch Y Position in pixels

### 11.2.9 TOUCHn\_XH (n:1-10)

This register describes MSB of the X coordinate of the nth touch point and corresponding touch ID.

Address	Bit Address	Register Name	Description
Op,05h ~ Op,3Bh	7:4 3:0	Touch ID[3:0] Touch X Position [11:8]	Touch ID of Touch Point MSB of Touch X Position in pixels

### 11.2.10 TOUCHn\_XL (n:1-10)

This register describes LSB of the X coordinate of the nth touch point.

Address	Bit Address	Register Name	Description
Op,06h ~ Op,3Ch	7:0	Touch X Position [7:0]	LSB of The Touch X Position in pixels


<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	22

## 12. Optical Characteristics

The optical characteristics should be measured in a dark environment ( $\leq 1$  lux) or equivalent state with the methods shown in Note (5).

Item		Symbol	Conditions	Min.	Typ.	Max.	Unit	Note
Contrast Ratio		CR	$\theta_x=0^\circ, \theta_y=0^\circ$ Viewing Normal Angle	300	(450)	-	-	(2),(5)
Response Time		$T_{R+} T_F$		-	20	-	ms	(3)
Luminance(Center)		LC		420	560	-	cd/m <sup>2</sup>	(4),(5)
Brightness uniformity		B <sub>UNI</sub>		70	(75)	-	%	(5),(6)
Color Chromaticity	Red	R <sub>x</sub>		0.570	0.620	0.670	-	(1),(5)
		R <sub>y</sub>		0.290	0.340	0.390	-	
	Green	G <sub>x</sub>		0.300	0.350	0.400	-	
		G <sub>y</sub>		0.520	0.570	0.620	-	
	Blue	B <sub>x</sub>		0.090	0.140	0.190	-	
		B <sub>y</sub>		0.050	0.100	0.150	-	
	White	W <sub>x</sub>	0.270	0.320	0.370	-		
		W <sub>y</sub>	0.280	0.330	0.380	-		
Viewing Angle	Horizontal	$\theta_{x+}$	CR $\geq$ 10	55	(65)	-	deg.	
		$\theta_{x-}$		55	(65)	-		
	Vertical	$\theta_{y+}$		40	(50)	-		
		$\theta_{y-}$		50	(60)	-		


Note (1) Definition of Viewing Angle ( $\theta_x, \theta_y$ ):

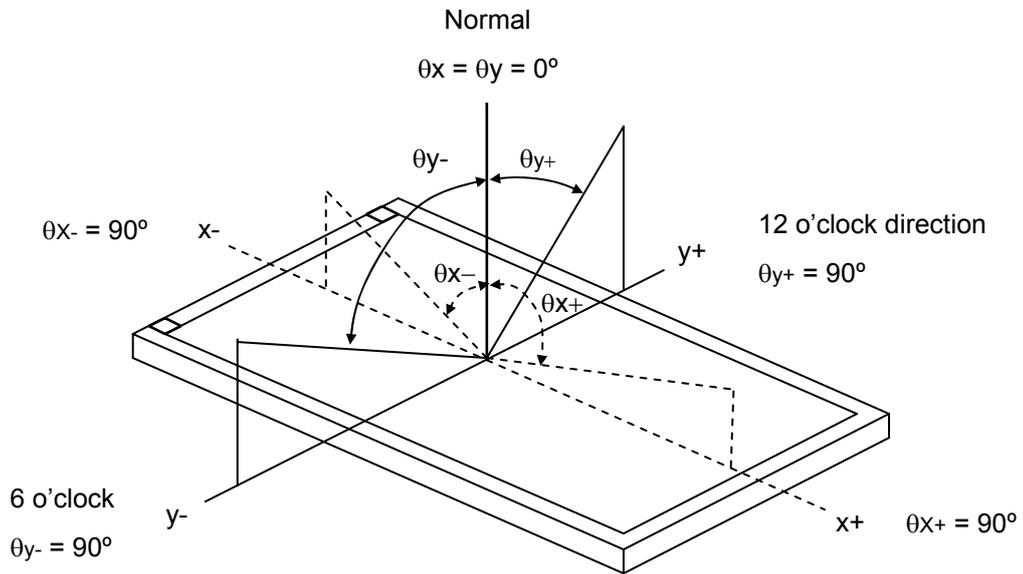

Note (2) Definition of Contrast Ratio (CR):


$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note (3) Definition of Response Time ( $T_R, T_F$ ):

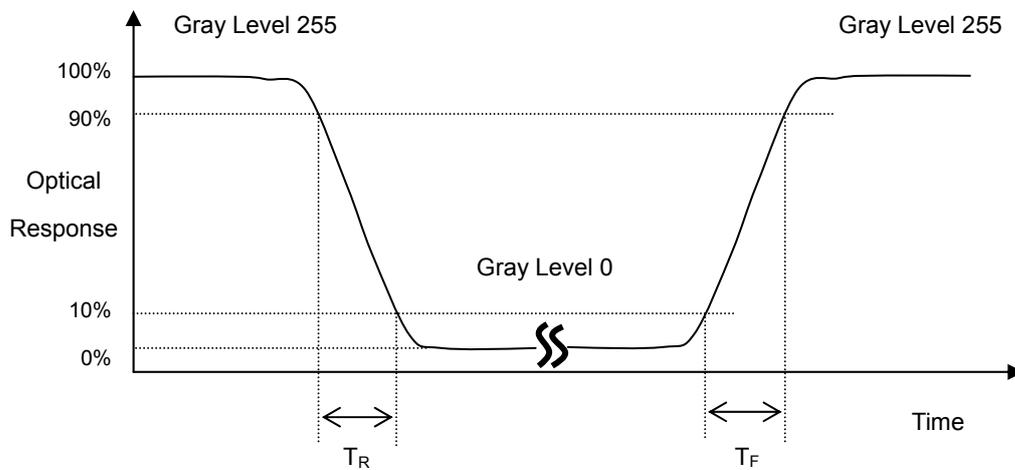


**Note (4) Measurement Set-Up:**

The LCD module should be stabilized at a given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a windless room.

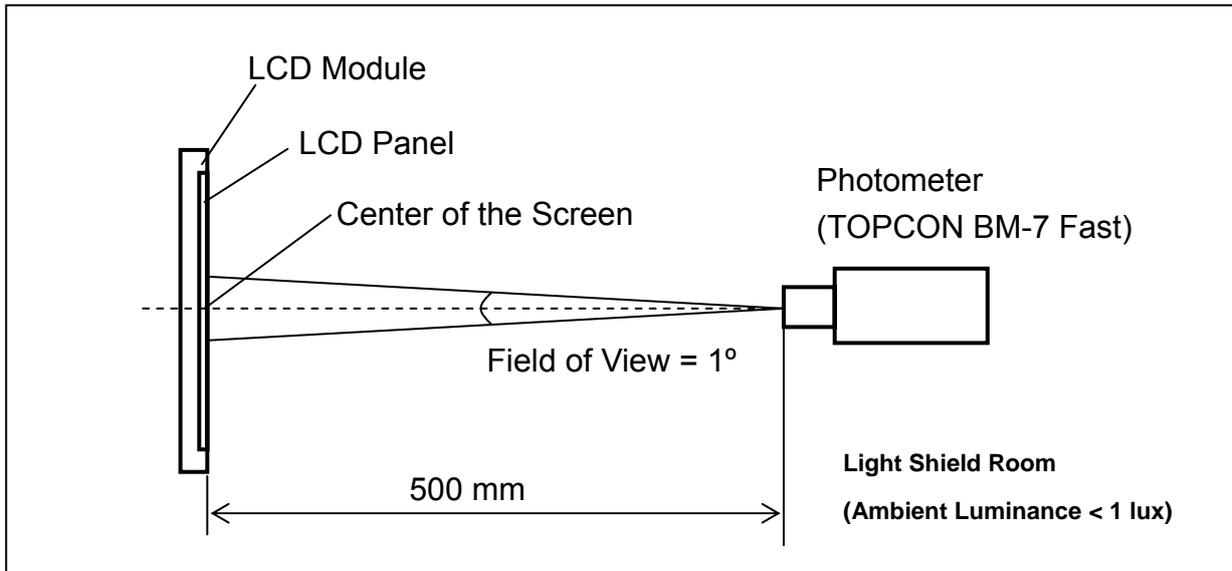

**Note (5) Definition of brightness uniformity**

$$\text{Brightness uniformity} = \frac{\text{Min Luminance of 9 points}}{\text{Max Luminance of 9 points}} \times 100\%$$

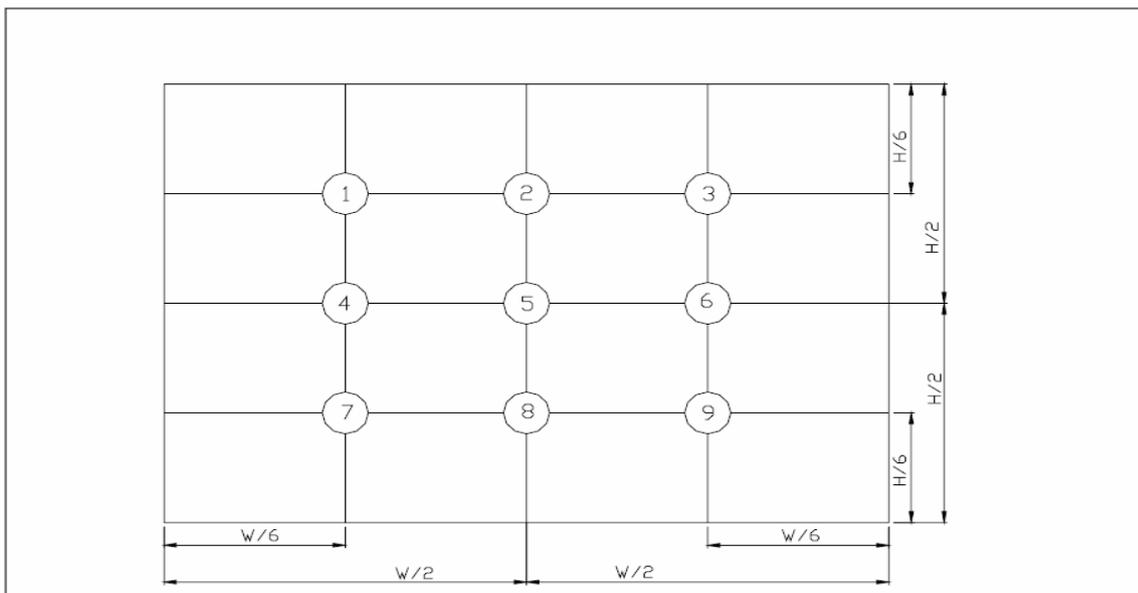

( 單位 : mm )

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	25

### 13. Reliability Test

No.	Test Items	Test Condition	Remark
1	High Temperature Storage Test	T <sub>a</sub> = 80°C 240 hours	(1),(3),(4)
2	Low Temperature Storage Test	T <sub>a</sub> = -30°C 240 hours	(1),(3),(4)
3	High Temperature Operation Test	T <sub>s</sub> = 70°C 240 hours	(2),(3),(4)
4	Low Temperature Operation Test	T <sub>a</sub> = -20°C 240 hours	(1),(3),(4)
5	High Temperature and High Humidity Operation Test	T <sub>a</sub> =60°C 90%RH 240 hours	(3), (4)
6	Electro Static Discharge Test ( non-operating )	-Panel Surface/Top Case : 150pF, 330Ω Air : ±15kV, Contact: ±8kV	(3)
7	Mechanical Shock Test ( non-operating )	Half sine wave, 100G, 6ms 3 times shock of each six surfaces	(3)
8	Vibration Test ( non-operating )	Sine wave:10 ~ 55 ~ 10Hz amplitude:1.5mm 3 axis, 2 hours/axis	(3)
9	Thermal Shock Test ( non-operating )	-20°C (30min) ~ 70°C (30min) ,10 cycles	(3) , (4)
10	Drop Test(with Carton)	Height : 80cm 1 corner, 3 edges, 6 surfaces	(3)


Note 1 : T<sub>a</sub> is the ambient temperature of samples.

Note 2 : T<sub>s</sub> is the temperature of panel' s surface.

Note 3 : In the standard condition, there shall be no practical problem that may affect the display function.  
After the reliability test, the product only guarantees operation, but don' t guarantee all of the cosmetic specification.

Note 4 : Before cosmetic and function test, the product must have enough recovery time, at least 2 hours at room temperature.

**14. Packaging**

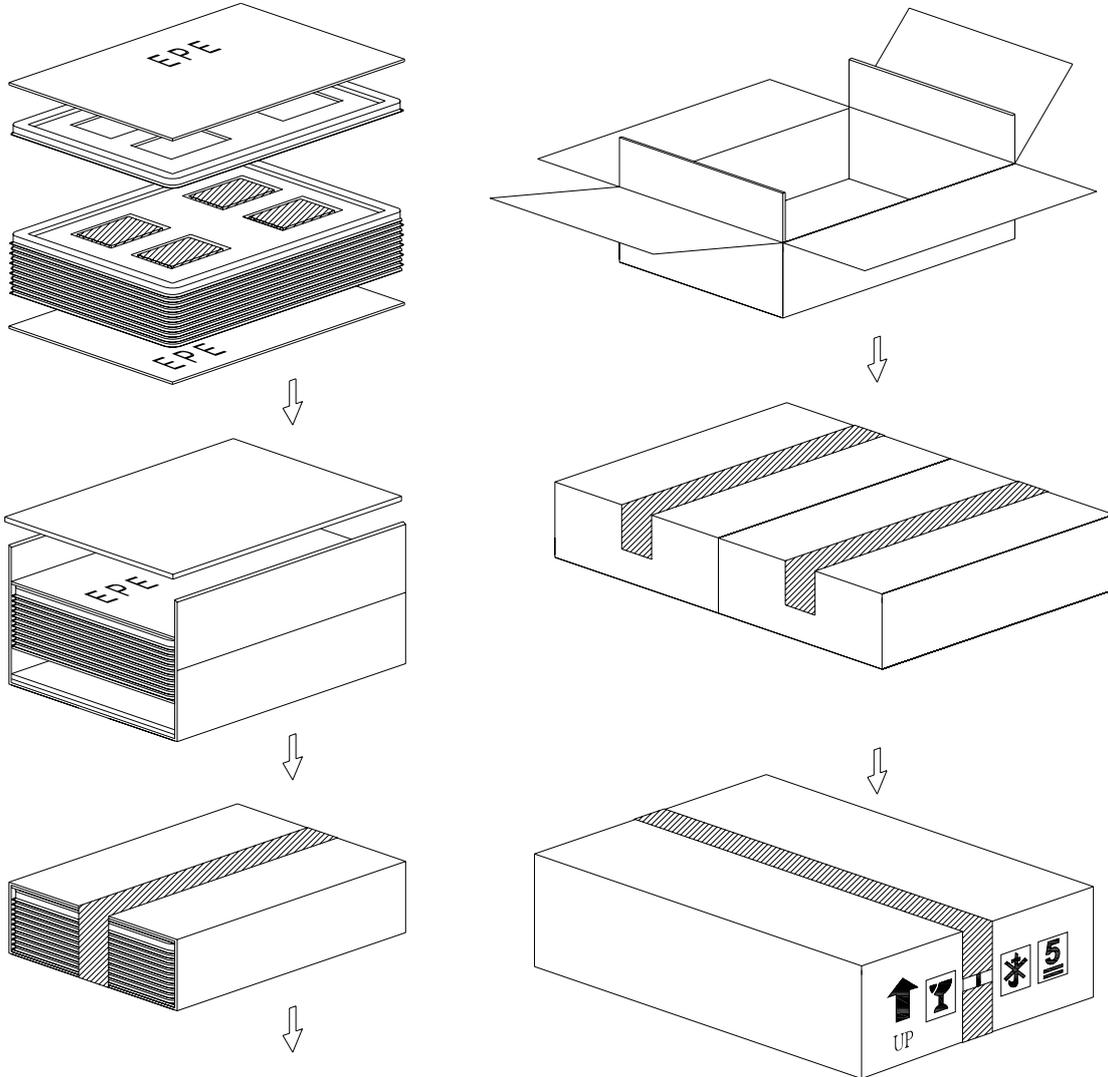

PARTS LIST					
	ITEM	SIZE(LxWxH) unit:mm	MATERIAL	Q.T.Y	NOTE
1	TRAY	372.0x262.0x19.55		18	
2	EPE(J46)	372.0x262.0x5.0	EPE	4	
3	CARD BOARD(P01)	816.0x375.0x3.5	CARTON	2	
4	CARD BOARD(P02)	945.0x275.0x3.5	CARTON	2	
5	CARD BOARD(P03)	375.0x265.0x3.5	CARTON	4	
6	INTERNAL BOX(S01)	400.0x290.0x150.0	CARTON	2	
7	EXTERNAL BOX(L28)	600.0x420.0x180.0		1	
8	PRODUCT	105.5x67.2x9.6		64	

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	27

## **15. Precautions**

### **15.1 Assembly and Handling Precautions**

- (1) Do not apply rough force such as bending or twisting to the module during assembly.
- (2) It's recommended to assemble or to install a module into the user's system in clean working areas. The dust and oil may cause electrical short or worsen the polarizer.
- (3) Don't apply pressure or impulse to the module to prevent the damage of LCD panel and Backlight.
- (4) Always follow the correct power-on sequence when the LCD module is turned on. This can prevent the damage and latch-up of the CMOS LSI chips.
- (5) Do not plug in or pull out the I/F connector while the module is in operation.
- (6) Do not disassemble the module.
- (7) Use a soft dry cloth without chemicals for cleaning, because the surface of polarizer is very soft and easily scratched.
- (8) Moisture can easily penetrate into LCD module and may cause the damage during operation.
- (9) High temperature or humidity may deteriorate the performance of LCD module. Please store LCD module in the specified storage conditions.
- (10) When ambient temperature is lower than 10°C, the display quality might be reduced. For example, the response time will become slow.

### **15.2 Safety Precautions**

- (1) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.
- (2) After the module's end of life, it is not harmful in case of normal operation and storage.

### **15.3 Terms of Warrant**

- (1) Acceptance inspection period  
The period is within one month after the arrival of contracted commodity at the buyer's factory site.
- (2) Applicable warrant period  
The period is within twelve months since the date of shipping out under normal using and storage conditions.



### 17. Definition of Labels


The bar code nameplate is pasted on each module as illustration, and its definitions are as following explanation.



(a) Module Name: VGG482711-6UFLWE

(b) Serial ID:

**A B C D E F G H I J K L M**

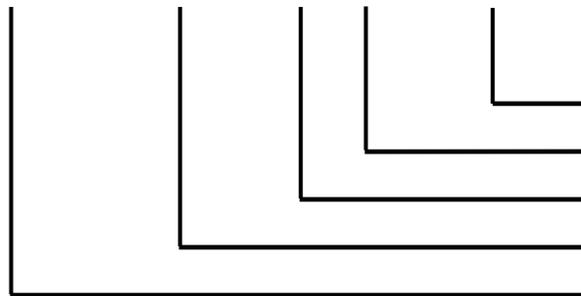

Serial No.  
Revision Code  
Factory Code  
Manufactured Date  
Screen Size

Serial ID includes the information as below:

(a) Screen size (Diagonal): Inch Code (ABCD)

3.5" → 0350

10.4" → 1040

(b) Manufactured Date: Year, Month, Day (EFG)

Year (E)

Year	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009
Mark	0	1	2	3	4	5	6	7	8	9
Year	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019
Mark	A	B	C	D	E	F	G	H	I	J

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	30

Month (F)

Month	Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	A	B	C

Day (G)

Day	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Mark	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G
Day	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	
Mark	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	

(c) Factory Code (H):

For EVERVISION internal use.

(d) Revision Code (I):

Cover all the change, for example: 1: Rev.1, 2: Rev.2, 3: Rev.3...etc.

(e) Serial No. (JKLM):

Manufacturing sequence of product, for example: 0001~9999.

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	31

## 18. Incoming Inspection Standards

### 18.1 The environmental condition of inspection

The environmental condition and visual inspection shall be conducted as below.

- (1) Ambient temperature  $25 \pm 5^{\circ}\text{C}$
- (2) Humidity:  $60 \pm 5\%$  RH
- (3) Viewing distance is approximately 35 ~ 40 cm
- (4) Viewing angle is normal to the LCD panel as Fig \_1( $10^{\circ}$ )
- (5) Ambient Illumination: 300 ~ 500 Lux for external appearance inspection

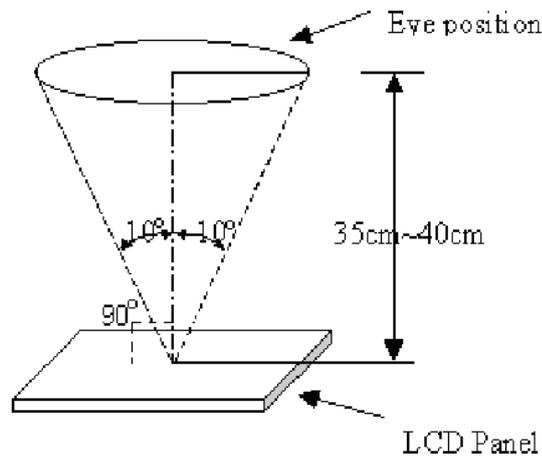


Fig \_ 1

### 18.2 The defects classify of AQL as following:

- (1) Test method :According to ANSI/ASQC Z 1.4 .General Inspection Level II take a single time
- (2) The defects classify of AQL as following:

Class of defects	AQL	Definition
Major	0.65%	It is defect that is likely to result in failure or to reduce materially the usability of the intended function.
Minor	1.5%	It is a defect that will not result in functioning problem with deviation classified.

<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	32

### 18.3 Inspection Parameters

Item		Specification/Description			Note	
Display	Function	No Display			-	
		Malfunction			-	
Operating	Contrast ratio	Out of Spec			-	
	Line defect	No obvious Vertical and Horizontal line defect in bright , dark and colored.			-	
	Point Defect (red,green,blue,dark, white)	Item	Acceptable number			Note: 1、4、5、6
			A	B	Total	
		BRIGHT DOT	$N \leq 2$	$N \leq 2$	$N \leq 7$	
		DARK DOT	$N \leq 3$	$N \leq 4$		
		TOTAL DOT	$N \leq 4$	$N \leq 5$		
TWO ADJACENT DOT	NOT ALLOWED					
THREE OR MORE ADJACENT DOT	NOT ALLOWED					
External Inspection (non-operating)	Scratch on the polarizer	L(mm)	W(mm)	Acceptable number	Note:2	
		$L \leq 2.5$	$W \leq 0.1$	4		
		$L > 2.5$	$W > 0.1$	0		
	Dent or bubble on the polarizer	Dimension(mm)	Acceptable number			Note:3
		$D \leq 0.5$	4			
		$D \leq 0.15$	Disregard			
	Foreign material on the polarizer	Dimension(mm)	Acceptable number			Note:3
		$D \leq 0.5$	4			
		$D \leq 0.15$	Disregard			

**Incoming Inspection Touch Panel**

Circular Defects  
 Linear Defects  
 Scratch  
 Air Bubble  
 Crack

(1) Circular Defects

$$\phi = (L+W)/2$$

Diameter(mm)	Spec
$\phi \leq 0.2$	No quantity limit
$0.2 < \phi < 0.4$	Max 5 defect
$0.4 \leq \phi$	Reject

(2) Linear Defects



Length	Width	Acceptable
$6.0 \geq L$	$0.06 \geq W$	Accept
$L \geq 6.0$	$W \geq 0.06$	Reject

(3) Scratch

Length	Width	Acceptable
$12.0 \geq L$	$0.06 \geq W$	Accept
$L \geq 12.0$	$W \geq 0.06$	Reject

The Min distance of defects must be above 5.0mm.

(4) Air Bubble

Diameter(mm)	Spec
$\phi \leq 0.2$	No quantity limit
$0.2 < \phi \leq 0.6$	Max 5 defect

The Min distance of defects must be above 5.0mm.


(5) Crack **Reject**




<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	34

Note1. The definition of dot defect : The dot defect was judged after repair and the size of a defective dot over 1/2 of whole dot is regarded as one defective dot.


Note2.

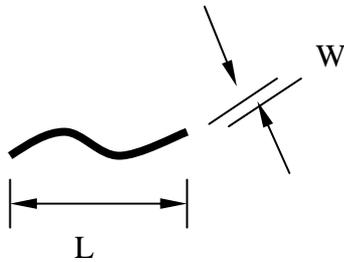

Note3. D : Diameter  $D=(a+b)/2$



Note4. Bright dot is defined through 6% transmission ND Filter as following.

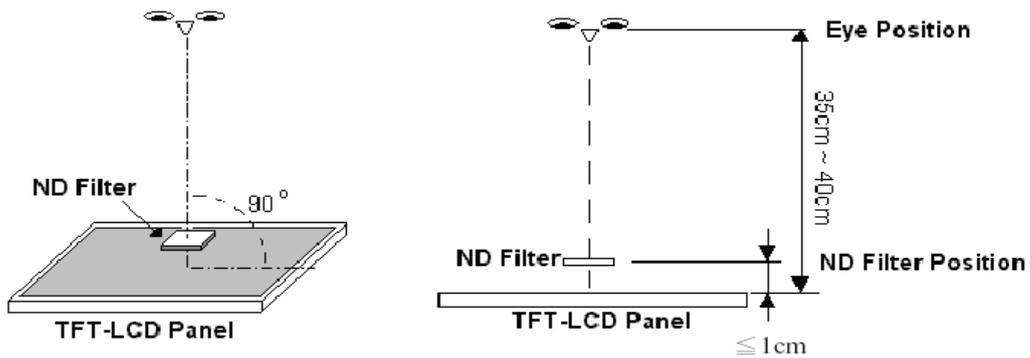


Note5. ADJACENT DOT



<b>EVERVISION</b>	<b>MODEL NO.</b>		<b>PAGE</b>
	VGG482711-6UFLWE	SPEC & SAMPLE	35

Note6.

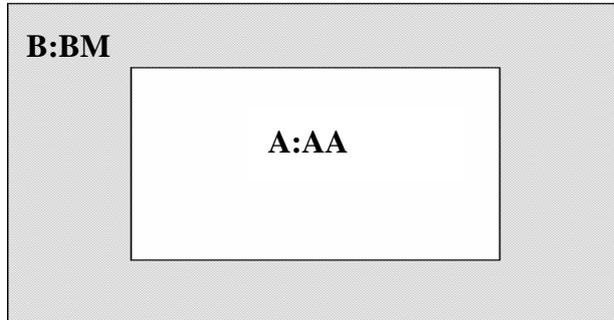

#### **18.4 Handling of LCM**

- (1) Don't give external shock.
- (2) Don't apply excessive force on the surface.
- (3) Liquid in LCD is hazardous substance. Must not lick and swallow. when the liquid is attach to your hand, skin, cloth etc. Wash it out thoroughly and immediately.
- (4) Don't operate it above the absolute maximum rating.
- (5) Don't disassemble the LCM.