



## FEATURES

- Originative New Design
- 100% EAS Test
- Rugged Gate Oxide Technology
- Extremely Low Intrinsic Capacitances
- Remarkable Switching Characteristics
- Unequalled Gate Charge : 28 nC (Typ.)
- Extended Safe Operating Area
- Lower  $R_{DS(ON)}$  : 0.46  $\Omega$  (Typ.) @ $V_{GS}=10V$

## APPLICATION

- Electronic lamp ballasts based on half bridge topology
- PFC (Power Factor Correction)
- SMPS (Switched Mode Power Supplies)

## PFP13N50/PFF13N50 500V N-Channel MOSFET

|   |   |
|---|---|
| $BV_{DSS} = 500 V$<br>$R_{DS(on)typ} = 0.46 \Omega$<br>$I_D = 12.5 A$ |   |
| <b>TO-220</b><br><br>1.Gate 2. Drain 3. Source                        | <b>TO-220F</b><br><br>1.Gate 2. Drain 3. Source |

## Absolute Maximum Ratings $T_C=25^\circ C$ unless otherwise specified

| Symbol         | Parameter   | PFP13N50    | PFF13N50 | Units         |
|----------------|---|-------------|----------|---------------|
| $V_{DSS}$      | Drain-Source Voltage  | 500         |          | V             |
| $I_D$          | Drain Current – Continuous ( $T_C = 25^\circ C$ )                             | 12.5        | 12.5*    | A             |
|                | Drain Current – Continuous ( $T_C = 100^\circ C$ )                            | 7.9         | 7.9*     | A             |
| $I_{DM}$       | Drain Current – Pulsed (Note 1)   | 50          | 50*      | A             |
| $V_{GS}$       | Gate-Source Voltage   | $\pm 30$    |          | V             |
| $E_{AS}$       | Single Pulsed Avalanche Energy (Note 2)                                       | 810         |          | mJ            |
| $I_{AR}$       | Avalanche Current (Note 1)  | 12.5        |          | A             |
| $E_{AR}$       | Repetitive Avalanche Energy (Note 1)  | 17          |          | mJ            |
| dv/dt          | Peak Diode Recovery dv/dt (Note 3)  | 5.5         |          | V/ns          |
| $P_D$          | Power Dissipation ( $T_C = 25^\circ C$ )                                      | 170         | 56       | W             |
|                | – Derate above $25^\circ C$   | 1.35        | 0.45     | W/ $^\circ C$ |
| $T_J, T_{STG}$ | Operating and Storage Temperature Range                                       | -55 to +150 |          | $^\circ C$    |
| $T_L$          | Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds | 300         |          | $^\circ C$    |

\* Drain current limited by maximum junction temperature

## Thermal Resistance Characteristics

| Symbol          | Parameter                               | PFP13N50 | PFF13N50 | Units        |
|-----------------|---|----------|----------|--------------|
| $R_{\theta JC}$ | Thermal Resistance, Junction-to-Case    | 0.74     | 2.23     | $^\circ C/W$ |
| $R_{\theta CS}$ | Thermal Resistance, Case-to-Sink        | 0.5      | --       |              |
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient | 62.5     | 62.5     |              |

**Electrical Characteristics**  $T_C=25\text{ }^\circ\text{C}$  unless otherwise specified

| Symbol  | Parameter                                     | Test Conditions  | Min | Typ  | Max  | Units                     |
|---|---|--|-----|------|------|---------------------------|
| <b>On Characteristics</b>                                     |   |  |     |      |      |                           |
| $V_{GS}$  | Gate Threshold Voltage                        | $V_{DS} = V_{GS}, I_D = 250\ \mu\text{A}$  | 2.0 | --   | 4.0  | V                         |
| $R_{DS(ON)}$  | Static Drain-Source On-Resistance             | $V_{GS} = 10\ \text{V}, I_D = 6.25\ \text{A}$  | --  | 0.46 | 0.57 | $\Omega$                  |
| <b>Off Characteristics</b>                                    |   |  |     |      |      |                           |
| $BV_{DSS}$  | Drain-Source Breakdown Voltage                | $V_{GS} = 0\ \text{V}, I_D = 250\ \mu\text{A}$   | 500 | --   | --   | V                         |
| $\Delta BV_{DSS} / \Delta T_J$                                | Breakdown Voltage Temperature Coefficient     | $I_D = 250\ \mu\text{A}$ , Referenced to $25\text{ }^\circ\text{C}$                          | --  | 0.5  | --   | $\text{V}/^\circ\text{C}$ |
| $I_{DSS}$   | Zero Gate Voltage Drain Current               | $V_{DS} = 500\ \text{V}, V_{GS} = 0\ \text{V}$   | --  | --   | 10   | $\mu\text{A}$             |
|   |   | $V_{DS} = 400\ \text{V}, T_C = 125\text{ }^\circ\text{C}$                                    | --  | --   | 100  | $\mu\text{A}$             |
| $I_{GSSF}$  | Gate-Body Leakage Current, Forward            | $V_{GS} = 30\ \text{V}, V_{DS} = 0\ \text{V}$  | --  | --   | 100  | nA                        |
| $I_{GSSR}$  | Gate-Body Leakage Current, Reverse            | $V_{GS} = -30\ \text{V}, V_{DS} = 0\ \text{V}$   | --  | --   | -100 | nA                        |
| <b>Dynamic Characteristics</b>                                |   |  |     |      |      |                           |
| $C_{iss}$   | Input Capacitance                             | $V_{DS} = 25\ \text{V}, V_{GS} = 0\ \text{V},$<br>$f = 1.0\ \text{MHz}$                      | --  | 1140 | 1480 | pF                        |
| $C_{oss}$   | Output Capacitance                            |  | --  | 155  | 200  | pF                        |
| $C_{rss}$   | Reverse Transfer Capacitance                  |  | --  | 18   | 25   | pF                        |
| <b>Switching Characteristics</b>                              |   |  |     |      |      |                           |
| $t_{d(on)}$   | Turn-On Time                                  | $V_{DS} = 250\ \text{V}, I_D = 12.5\ \text{A},$<br>$R_G = 25\ \Omega$<br><br>(Note 4,5)      | --  | 15   | 30   | ns                        |
| $t_r$   | Turn-On Rise Time                             |  | --  | 30   | 60   | ns                        |
| $t_{d(off)}$  | Turn-Off Delay Time                           |  | --  | 70   | 140  | ns                        |
| $t_f$   | Turn-Off Fall Time                            |  | --  | 30   | 60   | ns                        |
| $Q_g$   | Total Gate Charge                             | $V_{DS} = 400\ \text{V}, I_D = 12.5\ \text{A},$<br>$V_{GS} = 10\ \text{V}$<br><br>(Note 4,5) | --  | 28   | 35   | nC                        |
| $Q_{gs}$  | Gate-Source Charge                            |  | --  | 6.5  | --   | nC                        |
| $Q_{gd}$  | Gate-Drain Charge                             |  | --  | 12   | --   | nC                        |
| <b>Source-Drain Diode Maximum Ratings and Characteristics</b> |   |  |     |      |      |                           |
| $I_S$   | Continuous Source-Drain Diode Forward Current |  | --  | --   | 12.5 | A                         |
| $I_{SM}$  | Pulsed Source-Drain Diode Forward Current     |  | --  | --   | 50   |                           |
| $V_{SD}$  | Source-Drain Diode Forward Voltage            | $I_S = 12.5\ \text{A}, V_{GS} = 0\ \text{V}$   | --  | --   | 1.5  | V                         |
| $t_{rr}$  | Reverse Recovery Time                         | $I_S = 12.5\ \text{A}, V_{GS} = 0\ \text{V}$   | --  | 380  | --   | ns                        |
| $Q_{rr}$  | Reverse Recovery Charge                       | $di_F/dt = 100\ \text{A}/\mu\text{s}$ (Note 4)   | --  | 3.0  | --   | $\mu\text{C}$             |

**Notes ;**

1. Repetitive Rating : Pulse width limited by maximum junction temperature
2.  $I_{AS}=12.5\ \text{A}, V_{DD}=50\ \text{V}, R_G=25\ \Omega$ , Starting  $T_J=25\text{ }^\circ\text{C}$
3.  $I_{SD}\leq 12.5\ \text{A}, di/dt\leq 300\ \text{A}/\mu\text{s}, V_{DD}\leq BV_{DSS}$ , Starting  $T_J=25\text{ }^\circ\text{C}$
4. Pulse Test : Pulse Width  $\leq 300\ \mu\text{s}$ , Duty Cycle  $\leq 2\%$
5. Essentially Independent of Operating Temperature

## Typical Characteristics

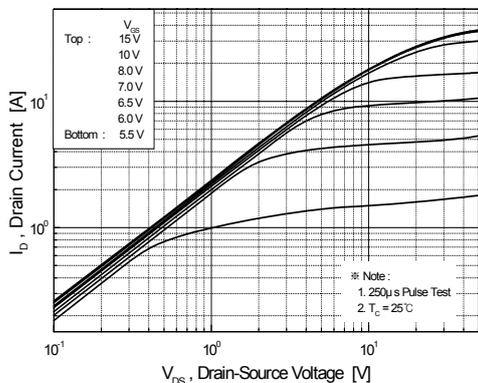


Figure 1. On Region Characteristics

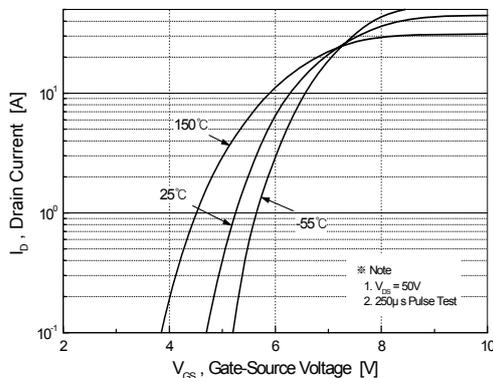


Figure 2. Transfer Characteristics

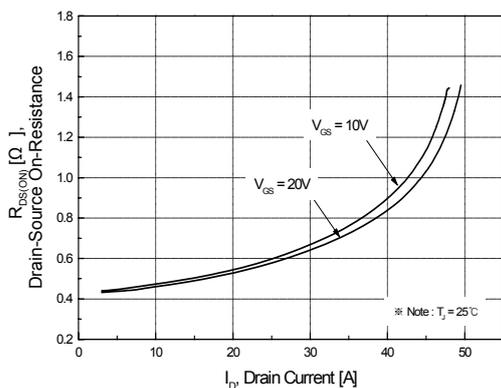


Figure 3. On Resistance Variation vs Drain Current and Gate Voltage

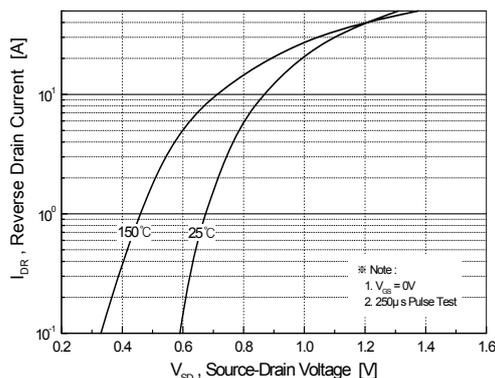


Figure 4. Body Diode Forward Voltage Variation with Source Current and Temperature

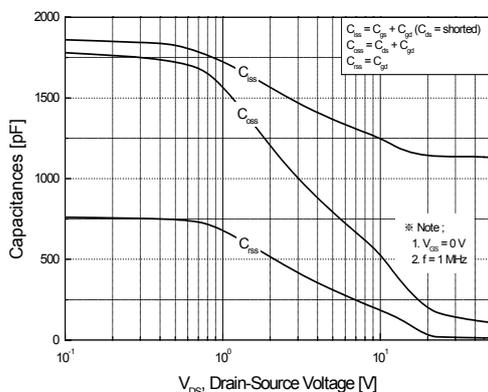


Figure 5. Capacitance Characteristics

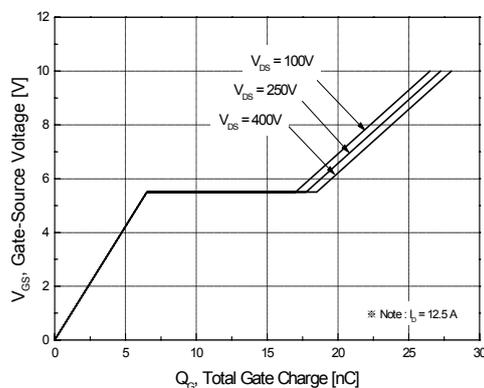


Figure 6. Gate Charge Characteristics

Typical Characteristics (continued)

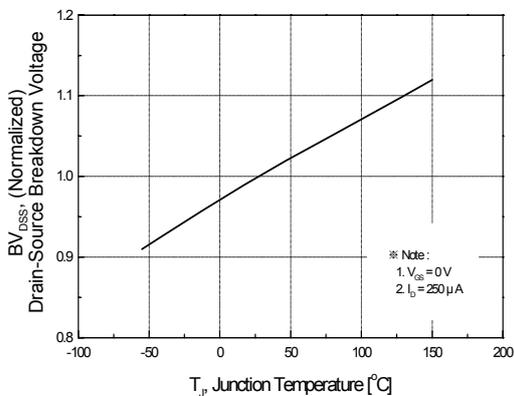


Figure 7. Breakdown Voltage Variation vs Temperature

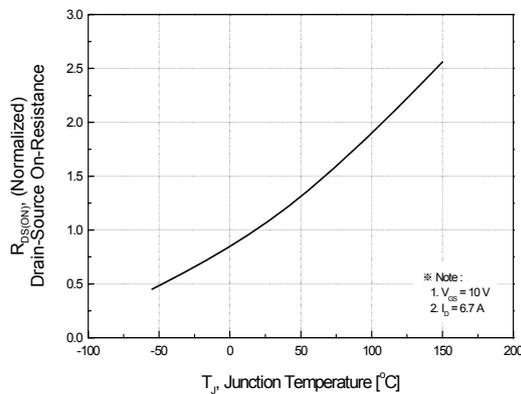


Figure 8. On-Resistance Variation vs Temperature

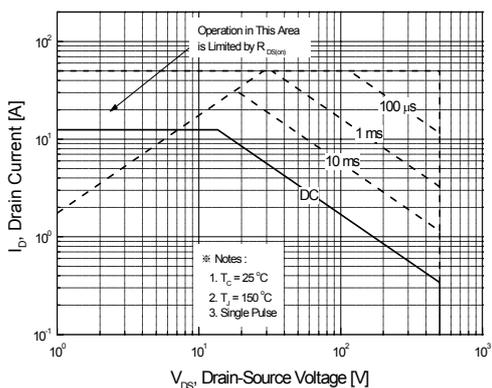


Figure 9. Maximum Safe Operating Area for PFP13N50

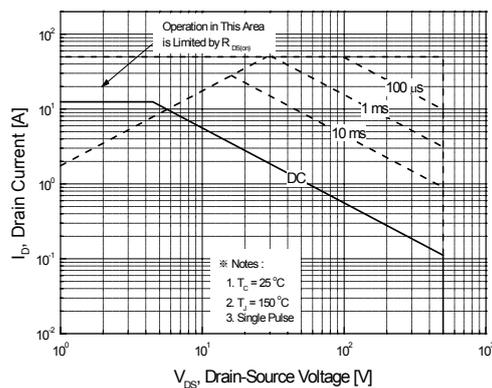


Figure 10. Maximum Safe Operating Area for PFF13N50

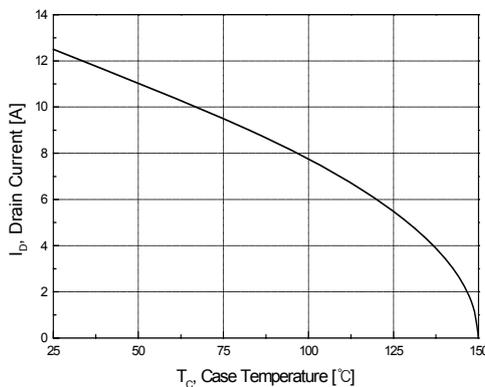


Figure 11. Maximum Drain Current vs Case Temperature

Typical Characteristics (continued)

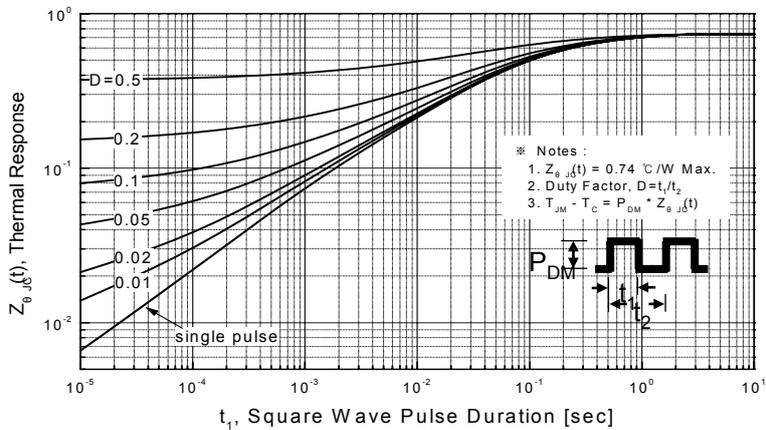


Figure 12. Transient Thermal Response Curve for PFP13N50

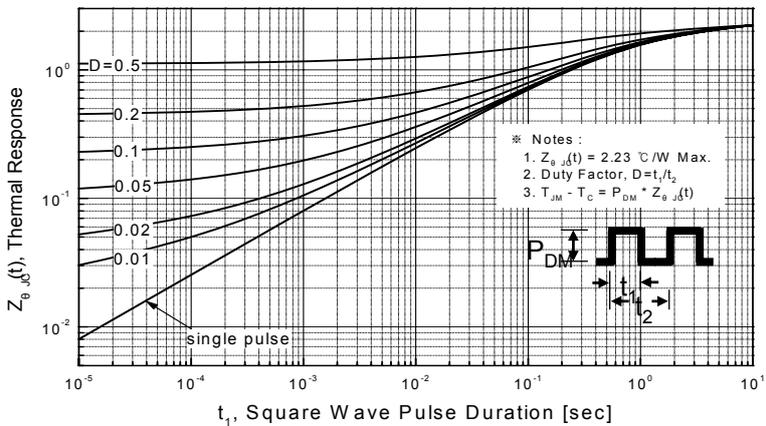


Figure 13. Transient Thermal Response Curve for PFF13N50

Characteristics Test Circuit & Waveform

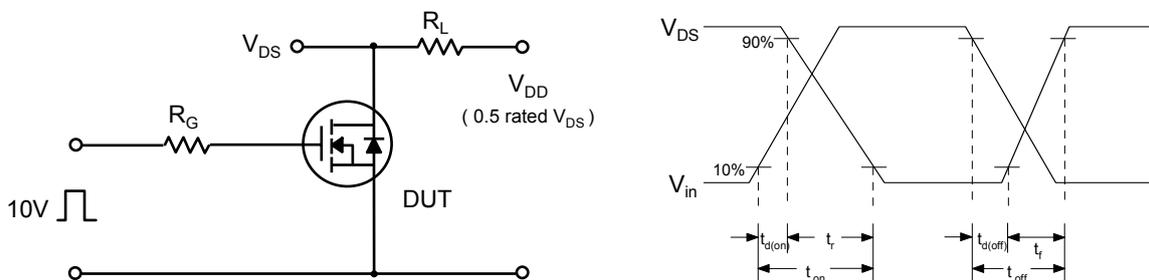


Fig 14. Resistive Switching Test Circuit & Waveforms

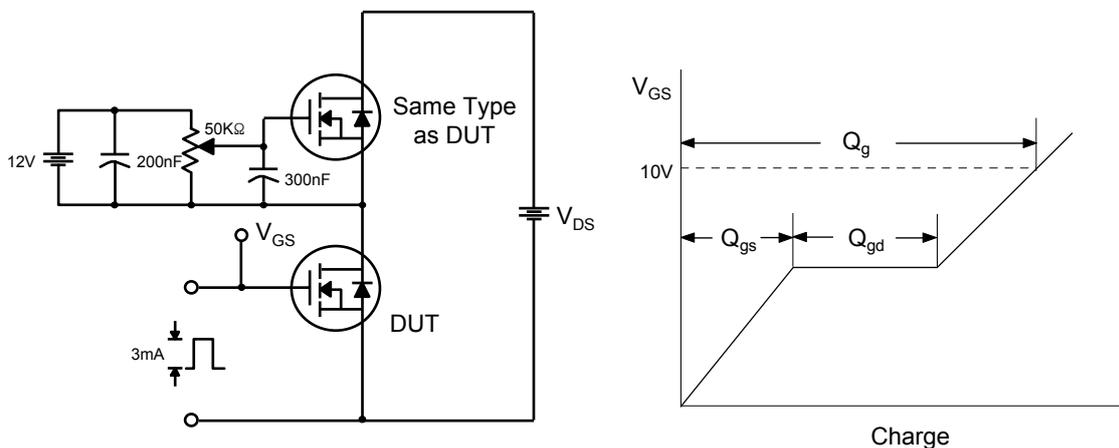


Fig 15. Gate Charge Test Circuit & Waveform

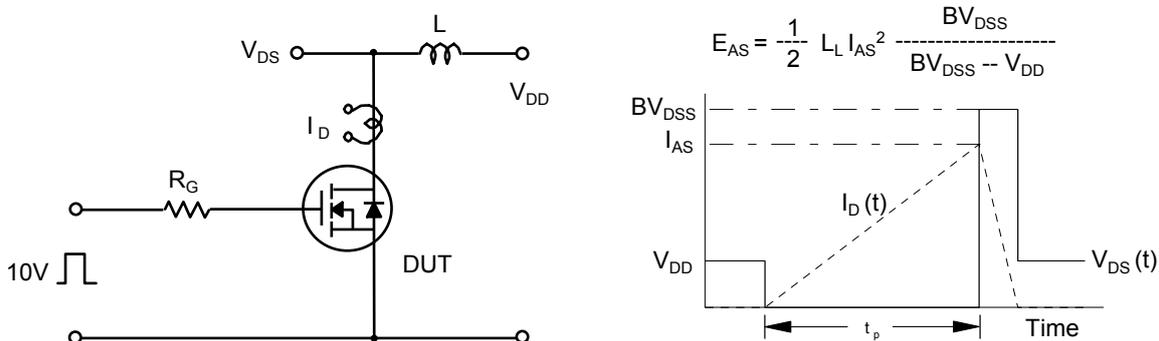


Fig 16. Unclamped Inductive Switching Test Circuit & Waveforms

Characteristics Test Circuit & Waveform (continued)



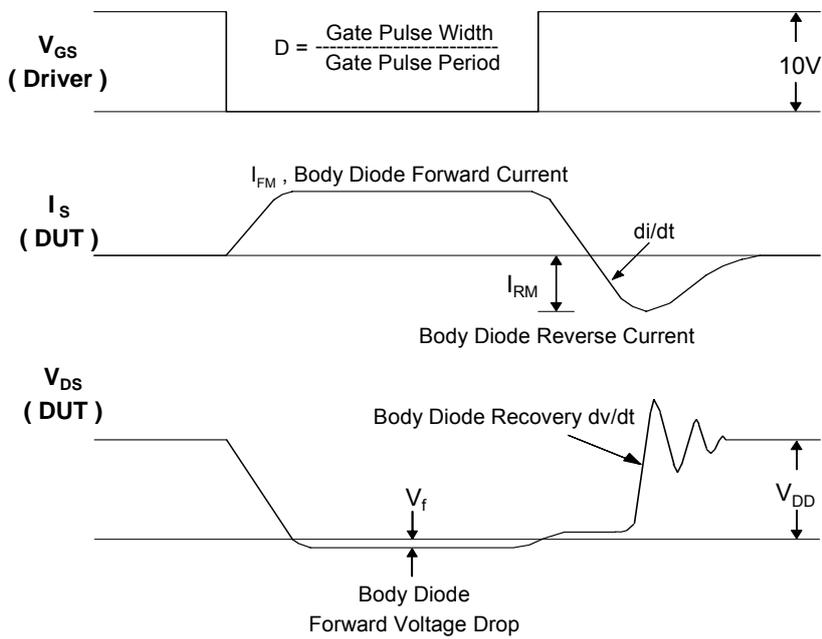


Fig 17. Peak Diode Recovery  $dv/dt$  Test Circuit & Waveforms

# Package Dimension


## TO-220

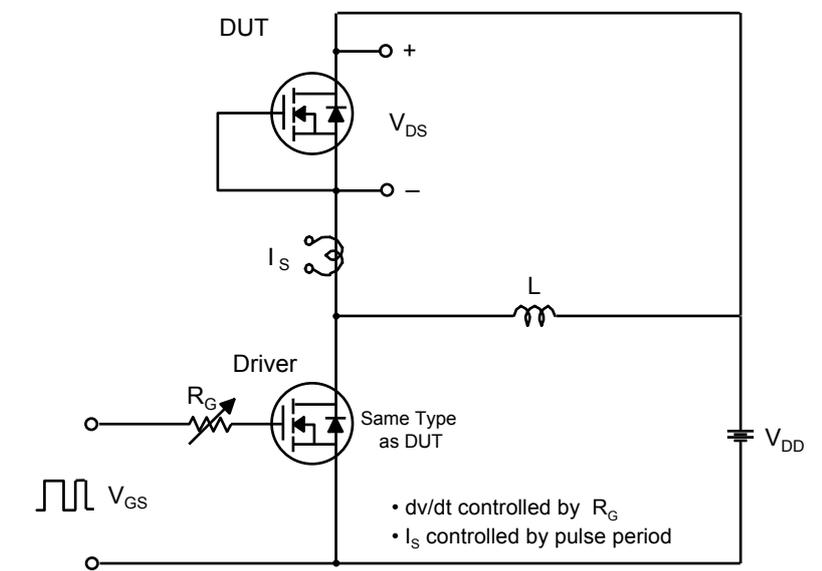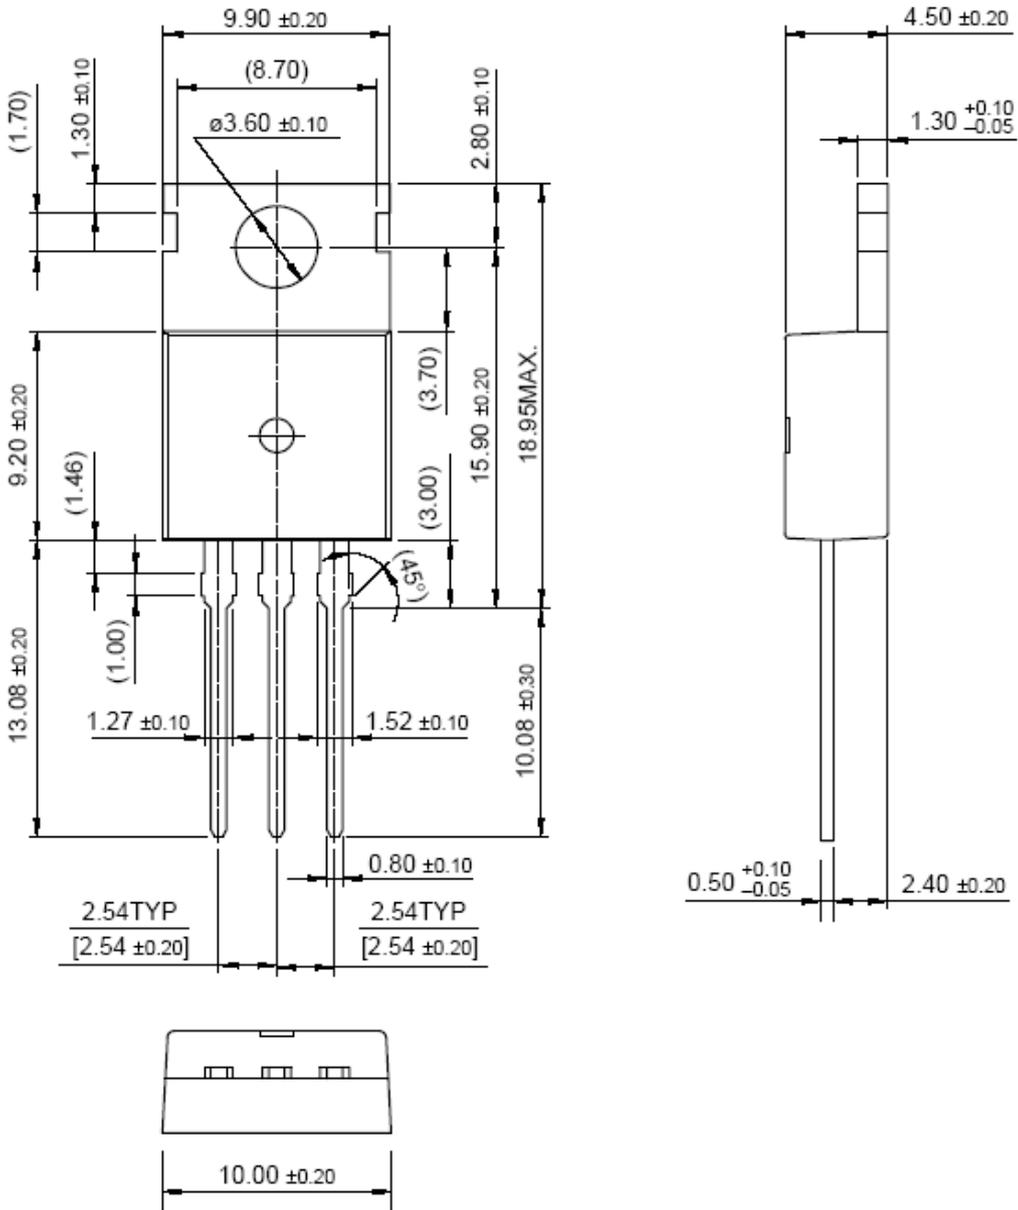

PFP13N50/PFF13N50

# Package Dimension

## TO-220F

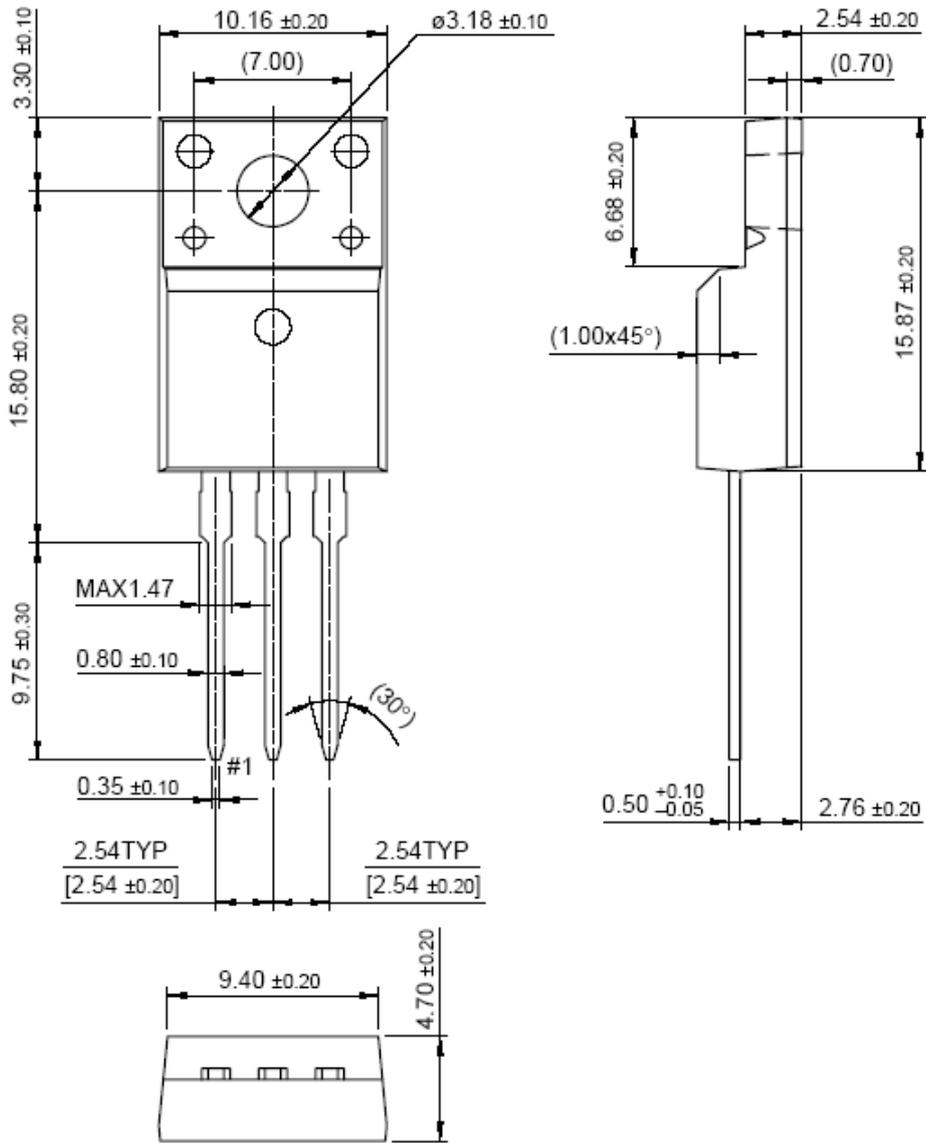

PFP13N50/PFF13N50

## Reliability Qualification

### A. High Temperature Reverse Bias ( HTRB )

The purpose of this test is to determine the sensitivity of the product to mobile ion contamination and related failure mechanisms.

Conditions: MIL-STD-750C 1038, JIS C 7021 B-3

$T_A=150^{\circ}\text{C}$   $V_{DS}=80\%$  max rated  $V_{DS}$

| Sample Size | #of Fail | Cum. Fail% | 168hrs | 300hrs |
|-------------|----------|------------|--------|--------|
| 45          | 0        | 0.0%       | 0      | 0      |

### B. High Temperature Gate Bias ( HTGB )

The purpose of this test is to determine the sensitivity of the product to mobile ion contamination between gate and source and related failure mechanisms.

Conditions: MIL-STD-750C 1038, JIS C 7021 B-3

$T_A=150^{\circ}\text{C}$   $V_{DS}=V_{GSS}$  max

| Sample Size | #of Fail | Cum. Fail% | 168hrs | 300hrs |
|-------------|----------|------------|--------|--------|
| 45          | 0        | 0.0%       | 0      | 0      |

### C. Temperature Humidity Bias ( THB )

The purpose of this test is to evaluate the moisture resistance of non-hermetic components.

The addition of voltage bias accelerates the corrosive effect after moisture penetration has taken place. with time, this is a catastrophically destructive test.

Conditions: JESD22-A101, JIS C 7021 B-11

$T_A=85^{\circ}\text{C}$  RH=85%  $V_{DS}=80\%$  max rated  $V_{DS}$

| Sample Size | #of Fail | Cum. Fail% | 168hrs | 300hrs |
|-------------|----------|------------|--------|--------|
| 45          | 0        | 0.0%       | 0      | 0      |

**Reliability Qualification (Continued)****D. High Temperature Storage ( HTS )**

The purpose of this test is to expose time/temperature failure mechanisms and to evaluate long-term strong stability.

Conditions: MIL-STD-750C 1031.4, JIS C 7021 B-10

$T_A = T_{stg}(\max) 150\text{ }^\circ\text{C}$

| Sample Size | #of Fail | Cum. Fail% | 168hrs | 300hrs |
|-------------|----------|------------|--------|--------|
| 45          | 0        | 0.0%       | 0      | 0      |

**E. Pressure Cooker Test ( PCT )****Autoclave ( ACLV )**

The purpose of this test is to evaluate the moisture resistance of non-hermetic components under pressure/temperature conditions.

Conditions: MIL-STD-750C 1071.2, JIS C 7021 A-6

$T_A = 121\text{ }^\circ\text{C} \pm 2\text{ }^\circ\text{C}$  RH=100% P=1 atmosphere (15psig)

| Sample Size | #of Fail | Cum. Fail% | 48hrs |
|-------------|----------|------------|-------|
| 22          | 0        | 0.0%       | 0     |

**F. Temperature Cycle Air-to Air ( T/C )**

The purpose of this test is to evaluate the ability of the device to withstand both exposure to extreme temperature and the transition between temperature extreme, and to exposure excessive thermal mismatch between materials.

Conditions: JESD22-A104, JIS C 7021 A-4

Air to air,  $-65\text{ }^\circ\text{C} \sim 150\text{ }^\circ\text{C}$ , 10 minutes dwell time at each temperature

| Sample Size | #of Fail | Cum. Fail% | 100cycles | 200cycles |
|-------------|----------|------------|-----------|-----------|
| 22          | 0        | 0.0%       | 0         | 0         |