




S8810MG



TECHNICAL DATA

Infrared Laser Diode

Features

- Mode Structure: single mode, edge emitting
- Peak Wavelength : typ. 880 nm
- Optical Output Power: 10 mW
- Package: 5.6 mm
- Ridge width 1x5 μm



Electrical Connection

Pin Configuration		Bottom View								
	<i>n-type</i> <table><thead><tr><th>PIN</th><th>Function</th></tr></thead><tbody><tr><td>1</td><td>LD Cathode</td></tr><tr><td>2</td><td>LD Anode, PD Cathode</td></tr><tr><td>3</td><td>PD Anode</td></tr></tbody></table>	PIN	Function	1	LD Cathode	2	LD Anode, PD Cathode	3	PD Anode	
PIN	Function									
1	LD Cathode									
2	LD Anode, PD Cathode									
3	PD Anode									

Absolute Maximum Ratings ($T_C=25^\circ\text{C}$)

Item	Symbol	Value	Unit
CW Output Power	P_O	10	mW
LD Reverse Voltage	V_{rLD}	2	V
PIN PD Reverse Voltage	V_{rPIN}	30	V
Operating Case Temperature	T_C	-10 ... +60	$^\circ\text{C}$
Storage Temperature	T_{stg}	-15 ... +85	$^\circ\text{C}$

Specifications ($T_C=25^\circ\text{C}$, $P_O=10\text{mW}$)

Item	Symbol	Min.	Typ.	Max.	Unit
Optical Specifications					
Center Wavelength	λ_C	870	880	890	nm
FWHM Beam Divergence*	$\theta_{ }$	8	12	15	deg
	$\theta_{\perp}$	28	38	45	deg
Electrical Specifications					
Threshold Current	I_{th}	-	10	15	mA
Operating Current	I_{op}	-	29	35	mA
Slope Efficiency	η	0.3	0.5	-	mW/mA
Operating Voltage	U_{op}	-	2.2	2.5	V
Monitor Current	I_m	0.2	-	0.6	mA


* $\theta_{||}$ and $\theta_{\perp}$ are defined as the angle within the intensity is 50% of the peak value.

The above specifications are for reference purpose only and subjected to change without prior notice.




Package Dimensions

5.6 mm Package (Unit:mm)

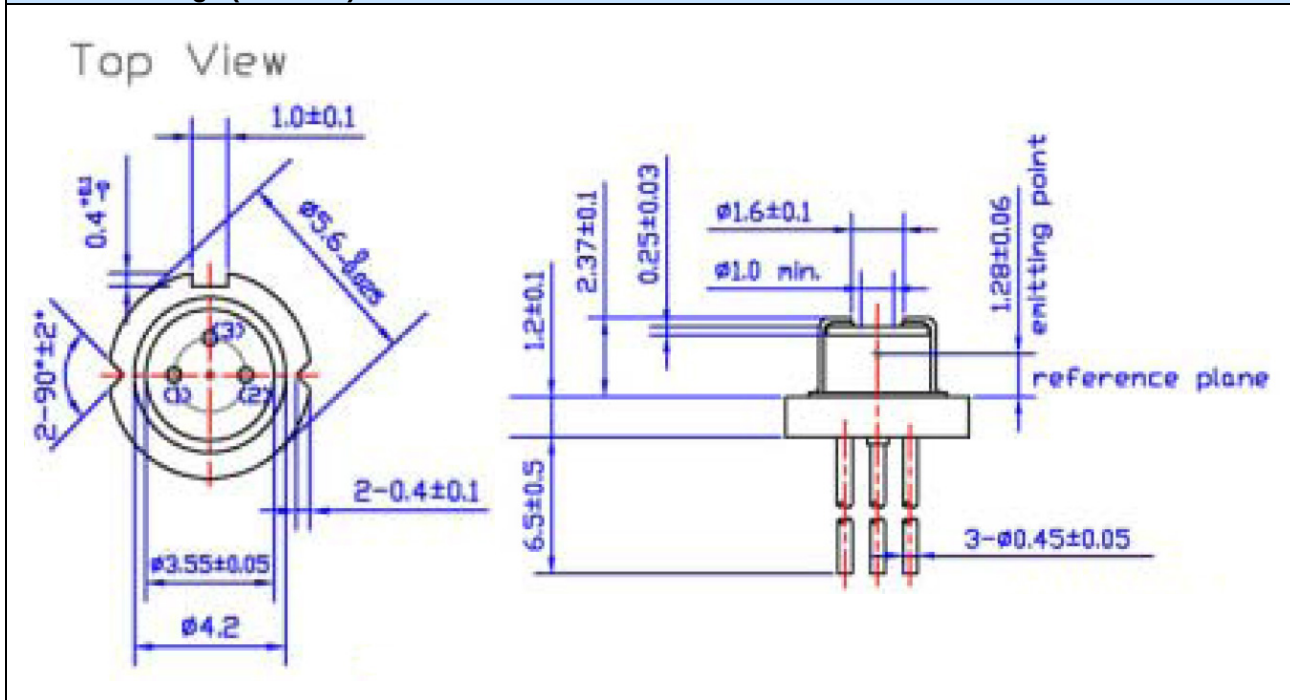


Typical Performance Curves

Optical Output Power vs. Forward Current

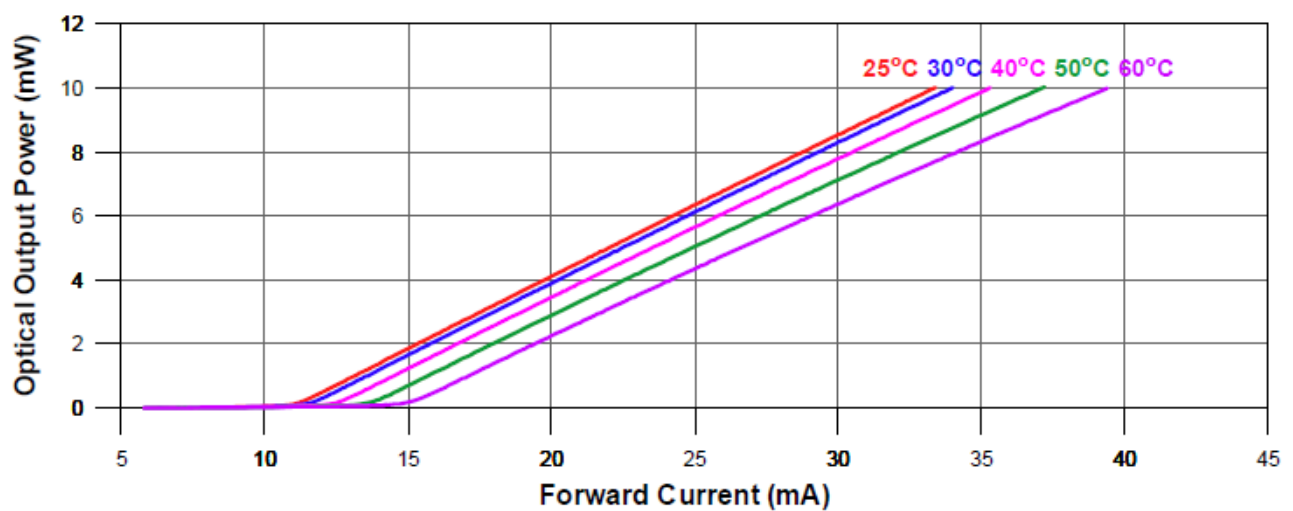





Forward Voltage vs. Forward Current

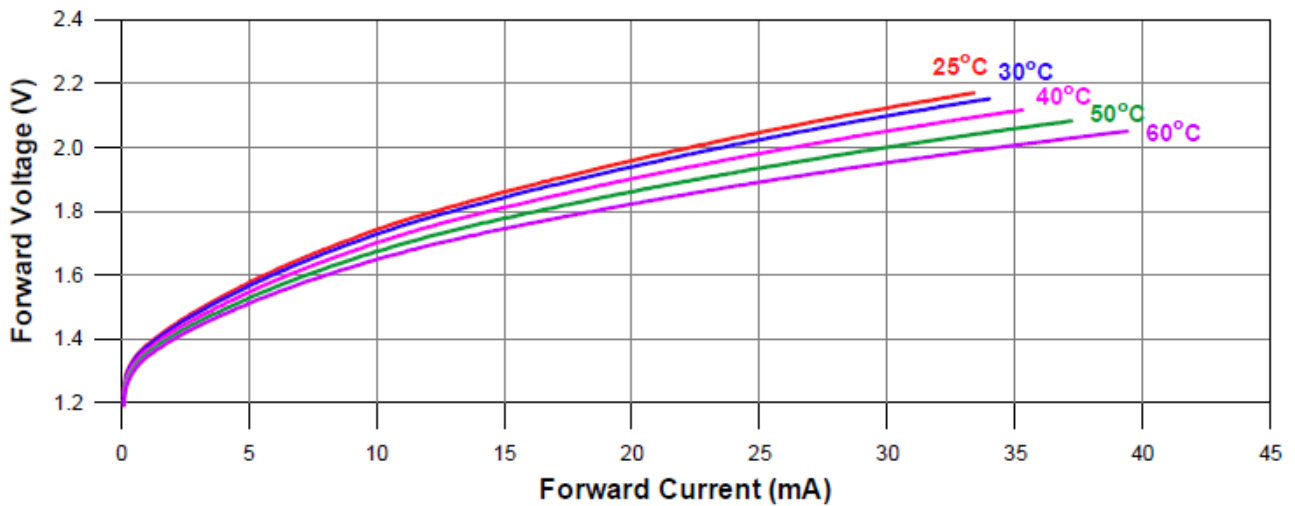

Peak Wavelength vs. Case Temperature

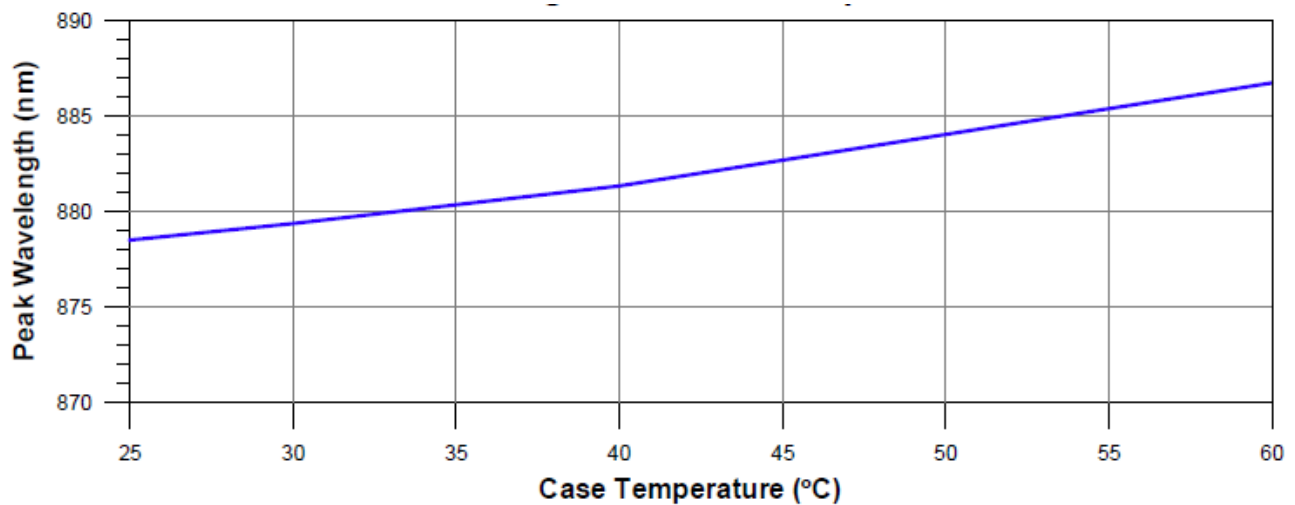


Far-Field Pattern

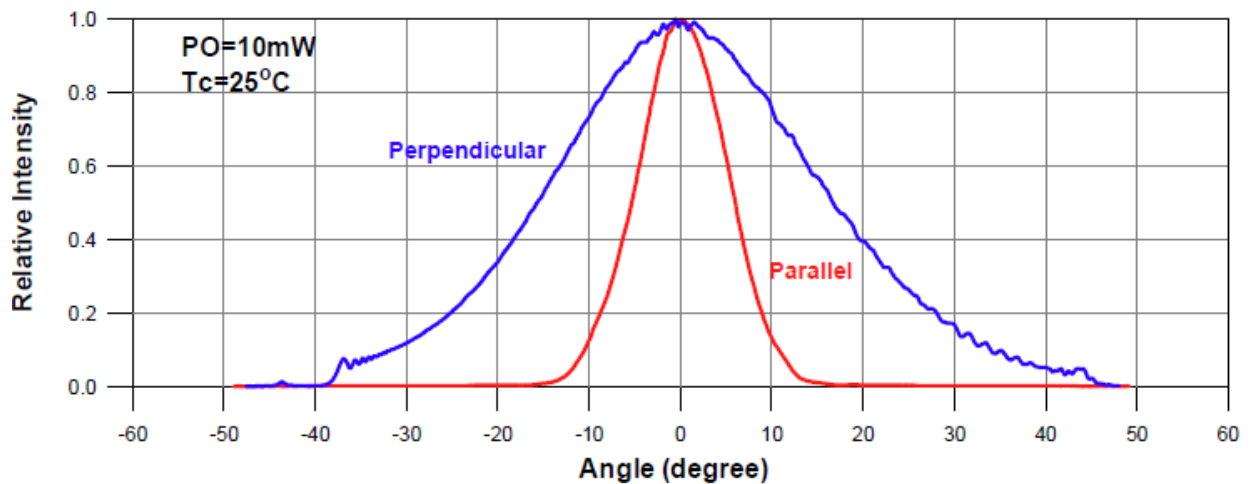





Monitor Current vs. Optical Output Power

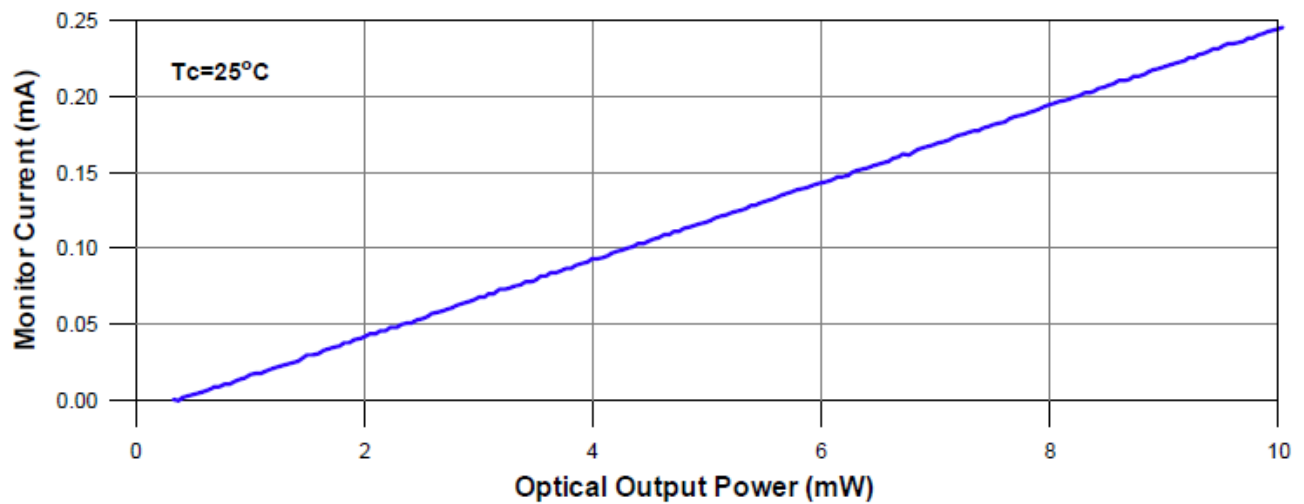

Slope Efficiency vs. Case Temperature

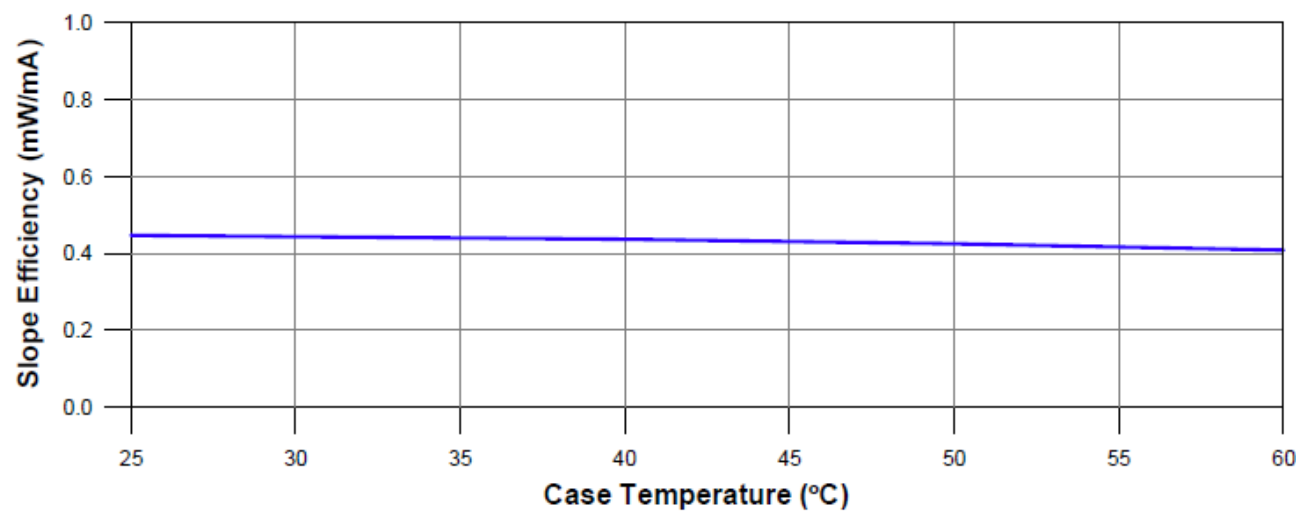

Threshold Current vs. Case Temperature

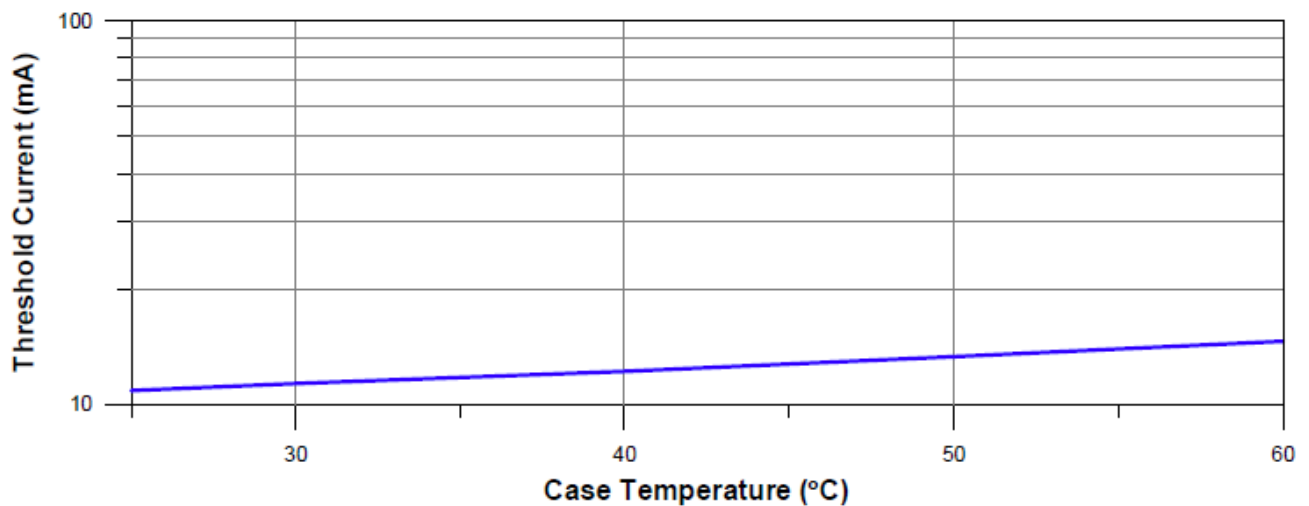



Safety of Laser light

- Laser Light can damage the human eyes and skin. Do not expose the eye or skin directly to any laser light and/or through optical lens. When handling the LDs, wear appropriate safety glasses to prevent laser light, even any reflections from entering to the eye. Focused laser beam through optical instruments will increase the chance of eye hazard.
- These LDs are emitting invisible light.



Cautions

1. Operating methode

- This LD shall change its forward voltage requirement and optical ouput power according to temperature change. Also, the LD will require more operation current to maintain same ouput power as it degrades. In order to maintain output power, use of APC (Automatic Power Control) is recommended. Which use monitor feedback to adjust the operation current.
- Confirm that electrical spike current generated by swithing on and off does not exceed the maximum operating current level specified herein above as absolute maximum rating. Also, employ appropriat countermeasures to reduce chattering and/or overshooting in the circuit.

2. Static Electricity

- Static electricity or electrical surges will reduce and degrade the reliability of the LDs. It is recommended to use a wrist trap or anti-electrostatic glove when handeling the product.

3. Absolute Maximum Rating

- Active layer of LDs shall have high current density and generate high electric field during its operation. In order to prevent excessive damage, the LD must be operated stricly below absolute maximum rating.



NOTE
LASERDIODE
MUST BE COOLED