


FFM101-M thru FFM107-M

FAST SWITCHING SURFACE MOUNT RECTIFIER

VOLTAGE - 50 TO 1000 VOLTS CURRENT - 1.0 AMPERES



SOD-123

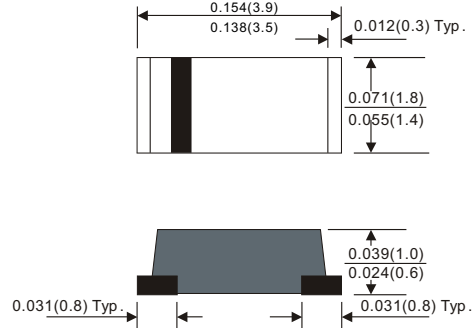

Dimensions in inches and (millimeters)

FEATURES

- Batch process design, excellent power dissipation offers better reverse leakage current and thermal resistance.
- Low profile surface mounted application in order to optimize board space.
- Tiny plastic SMD package.
- High current capability.
- Fast switching for high efficiency.
- High surge current capability.
- Glass passivated chip junction.
- Lead-free parts meet RoHS requirements.

MECHANICAL DATA

- Epoxy : UL94-V0 rated flame retardant
- Case : Molded plastic, SOD-123 / MINI SMA
- Terminals: Plated terminals, solderable per MIL-STD-750, Method 2026
- Polarity : Indicated by cathode band
- Mounting Position : Any
- Weight : Approximated 0.027 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

PARAMETER	CONDITIONS	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current	See Fig.2	I_O			1.0	A
Forward surge current	8.3ms single halfsine-wave superimposed on rate load (JEDEC method)	I_{FSM}			30	A
Reverse current	$V_R = V_{RRM} \quad T_A = 25^\circ\text{C}$	I_R			5.0	uA
	$V_R = V_{RRM} \quad T_A = 100^\circ\text{C}$				100	
Thermal resistance	Junction to ambient	$R_{\theta JA}$		42		$^\circ\text{C/W}$
Diode junction capacitance	f=1MHz and applied 4V DC reverse voltage	C_J		15		pF
Storage temperature		T_{STG}	-65		+175	$^\circ\text{C}$

SYMBOLS	V ^{*1} _{RRM} (V)	V ^{*2} _{RMS} (V)	V ^{*3} _R (V)	V ^{*4} _F (V)	T ^{*5} _{RR} (nS)	Operating temperature T _J , (°C)
FFM101-M	50	35	50	1.30	150	-55 to +150
FFM102-M	100	70	100			
FFM103-M	200	140	200			
FFM104-M	400	280	400		250	
FFM105-M	600	420	600			
FFM106-M	800	560	800		500	
FFM107-M	1000	700	1000			

*1 Repetitive peak reverse voltage

*2 RMS voltage

*3 Continuous reverse voltage

*4 Maximum forward voltage

*5 Reverse recovery time

FFM101-M thru FFM107-M

FAST SWITCHING SURFACE MOUNT RECTIFIER

RATING AND CHARACTERISTICS CURVES FFM101-M THRU FFM107-M

FIG.1-TYPICAL FORWARD CHARACTERISTICS

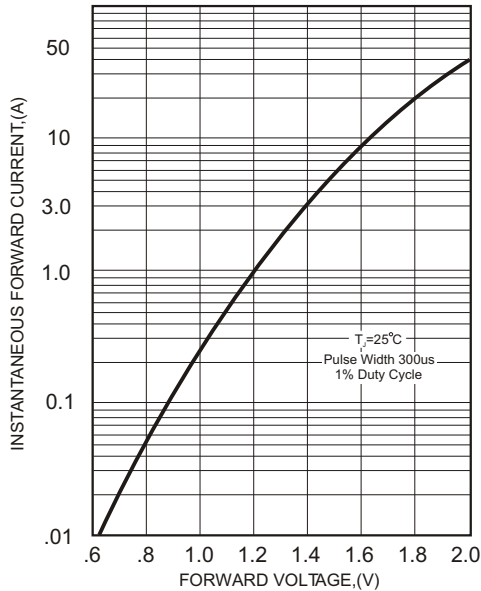


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

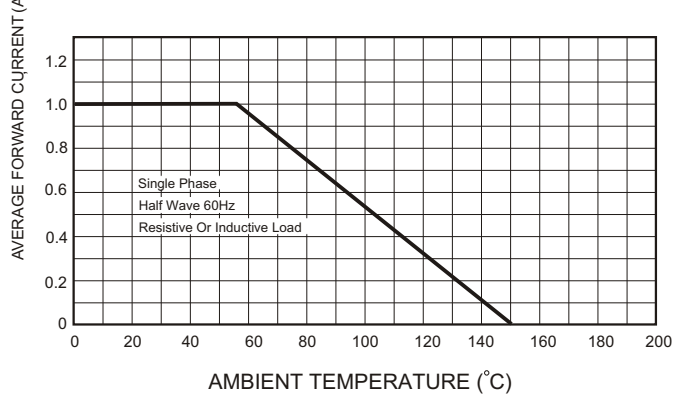


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


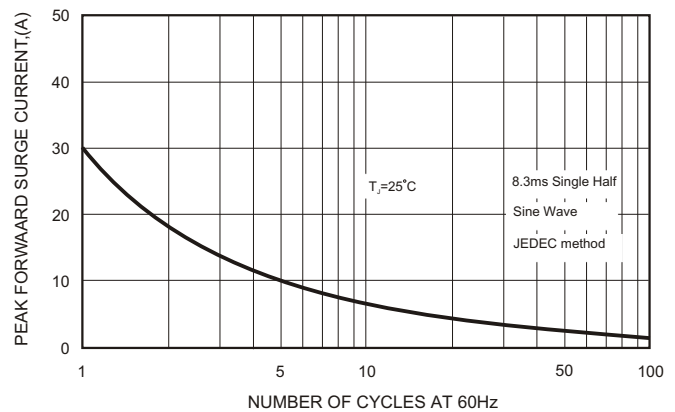


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

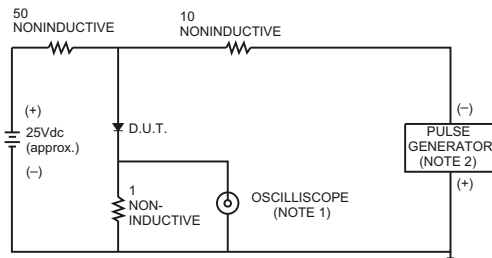

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm.22pF.

2. Rise Time= 10ns max., Source Impedance= 50 ohms.

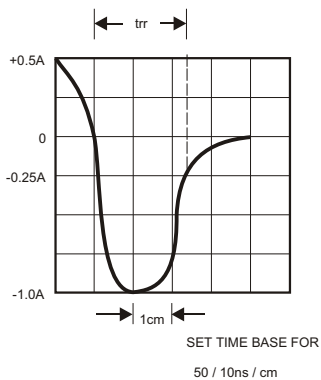


FIG.5-TYPICAL JUNCTION CAPACITANCE

