


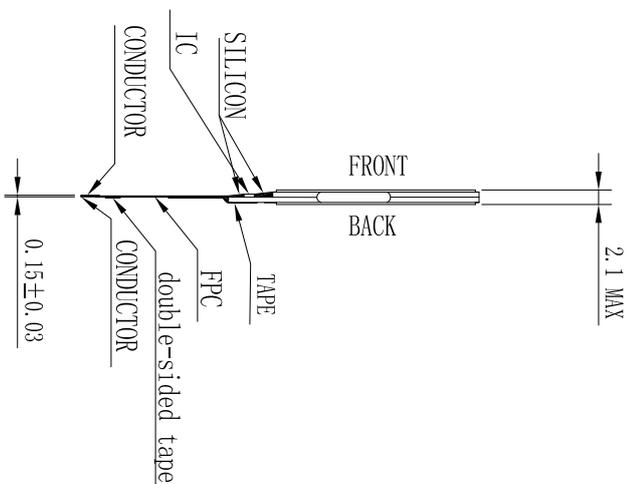


REV	REVISION RECORD	DATE
△	ACCORDING TO CUSTOM'S SPEC	2010-8-2
△	改原理和视角	2010-8-6

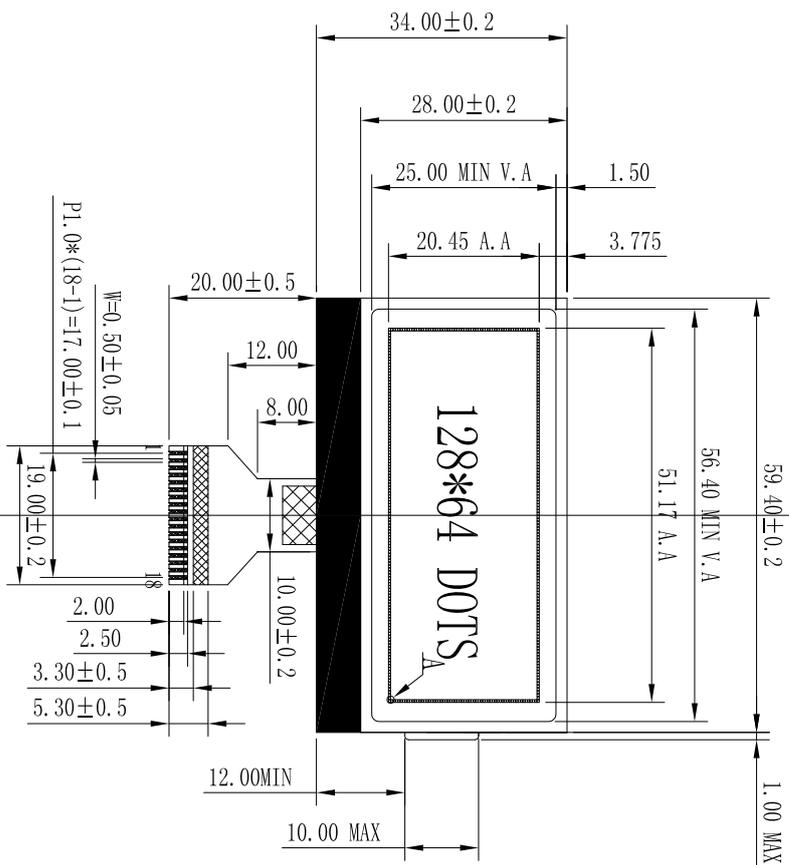


10:1
A

FUNCTION TABLE:

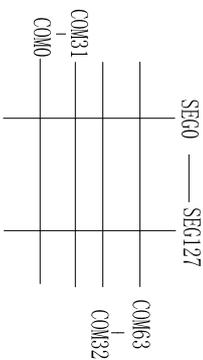

18	CS1
17	RST
16	A0
15	SCL
14	SDA
13	VDD
12	VSS
11	VOUT
10	CAP3P
9	CAP1N
8	CAP1P
7	CAP2P
6	CAP2N
5	V4
4	V3
3	V2
2	V1
1	V0



NO. SYMBOL

CONFIRM ALL TYPE DRAWINGS OF THIS AND PASS BACK!

深圳市彩晶科技有限公司

OPERATING VOLTAGE: 3.0V	OPERATING CURRENT: 2.0mA (MAX)
DISPLAY TYPE: FSM POSITIVE	POLARIZER MODE: TRANSFLECTIVE
LCD DRIVE METHOD: 1/65DUTY 1/9BIAS 9.0V	VIEW DIRECTION: 12:00 O'CLOCK
LCD CONTROLLER: ST7565R	BACK LIGHT: --
OPERATING TEMPERATURE: -20°C TO 70°C	STORAGE TEMPERATURE: -30°C TO 80°C
DEFAULT TOLERANCE: ±0.3	ROHS STANDARD: YES

TITLE	模块外形图	CUSTOMER NUMBER	REV
DES' D BY	纪永妹	PRODUCT MODEL	B
CHK' D BY		SERIAL NUMBER	UNIT
APPROVED		SCALE	DATE
		1:1	2010-8-6
			NO.
			1/1