


FEATURES

- High Output Power: Pout=33.0dBm (typ.)
- High Linear Gain: GL=22.0dB (typ.)
- Broad Band: 21.2 to 23.6GHz
- Impedance Matched Zin/Zout=50ohm
- Small Hermetic Metal-Ceramic SMT Package(V1B)

DESCRIPTION

The SMM5845V1B is a MMIC amplifier that contains a four-stage amplifier, internally matched, for standard communications band in the 21.2 to 23.6GHz frequency range.

SEDI's stringent Quality Assurance Program assures the highest reliability and consistent performance.

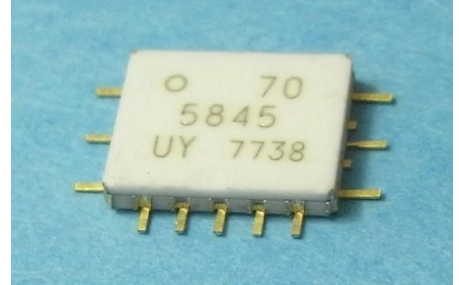

ABSOLUTE MAXIMUM RATING

Item	Symbol	Rating	Unit
Drain-Source Voltage	V_{DD}	10	V
Gate-Source Voltage	V_{GG}	-3	V
Input Power	P_{in}	23	dBm
Storage Temperature	T_{stg}	-55 to +125	deg.C

RECOMMENDED OPERATING CONDITIONS

Item	Symbol	Condition	Unit
Drain-Source Voltage	V_{DD}	≤ 6	V
Input Power	P_{in}	≤ 16	dBm
Operating Case Temperature	T_C	-40 to +85	deg.C

ELECTRICAL CHARACTERISTICS (Case Temperature $T_C=25\text{deg.C}$)

Item	Symbol	Test Conditions	Limits			Unit
			Min.	Typ.	Max.	
Frequency Range	f	VDD=6.0V	21.2	-	23.6	GHz
Gate Bias Voltage	Vgg(DC)	IDD(DC)=1400mA typ.	-0.50	-0.15	-0.01	V
Output Power	P_{OUT}	$P_{in}=+12.5\text{dBm}$	30.5	33	-	dBm
Output Power at 1dB G.C.P.	P_{1dB}	Vgg-Const.	-	33	-	dBm
Power Gain at 1dB G.C.P.	G1dB		18	21	-	dB
Power-added Efficiency at 1dB G.C.P.	η_{add}	Vgg-Const.	-	20	-	%
Third Order Intermodulation Distortion *	IM3	$Z_s=Z_L=50\text{ohm}$	-38	-42	-	dBc
Drain Current at 1dB G.C.P.	I_{ddrf}	* : $df=+10\text{MHz}$	-	1800	2200	mA
Input Return Loss at Pin=-20dBm	RLin	Pout=20.0dBm	-	8	-	dB
Output Return Loss at Pin=-20dBm	RLout	(S.C.L.)	-	10	-	dB

G.C.P. : Gain Compression Point

S.C.L. : Single Carrier Level

ESD	Class 0	$\leq 250\text{V}$
-----	---------	--------------------


Note : Based on JEDEC JESD22-A114 (C=100pF, R=1.5kohm)

CASE STYLE	V1B
RoHS COMPLIANCE	YES


ORDERING INFORMATION

Part Number	Order Unit	Packing
SMM5845V1B	No Limitation	48 pcs./Tray $\times$ 4 Tray = 192 pcs./Packing
SMM5845V1BT	500pcs.	500 pcs./Reel $\times$ 1 Reel = 500 pcs./Packing


Output Power vs. Frequency
VDD=6V, IDD(DC)=1400mA

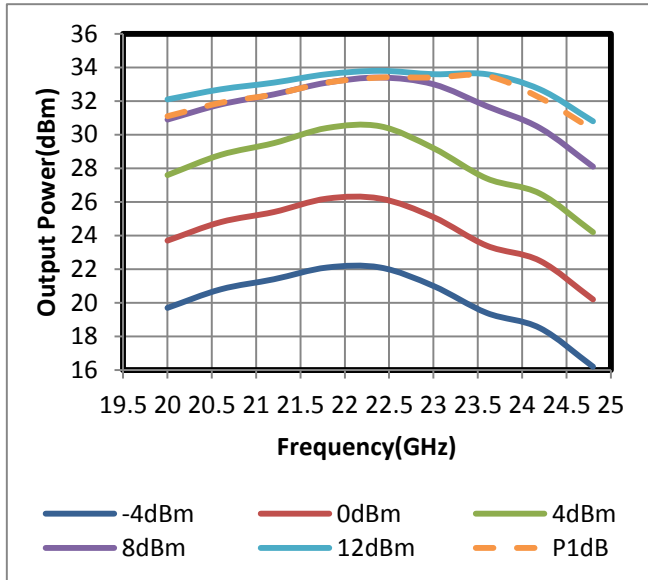

Output Power, Drain Current vs. Input Power
VDD=6V, IDD(DC)=1400mA

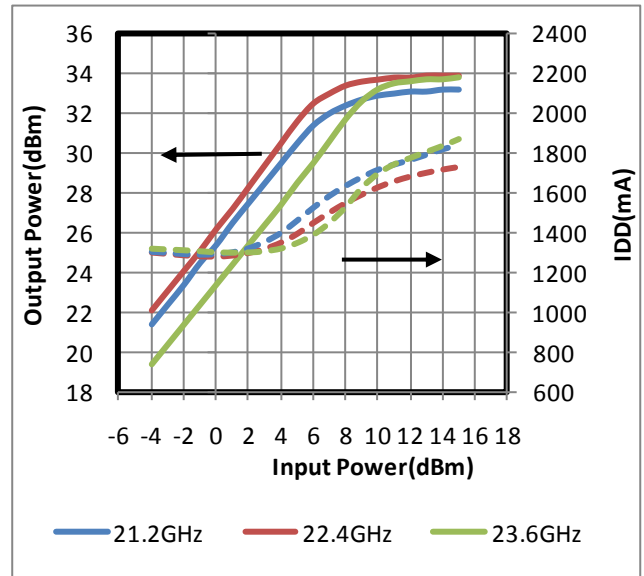


IMD Performance vs. Output Power
VDD=6V, IDD(DC)=1400mA

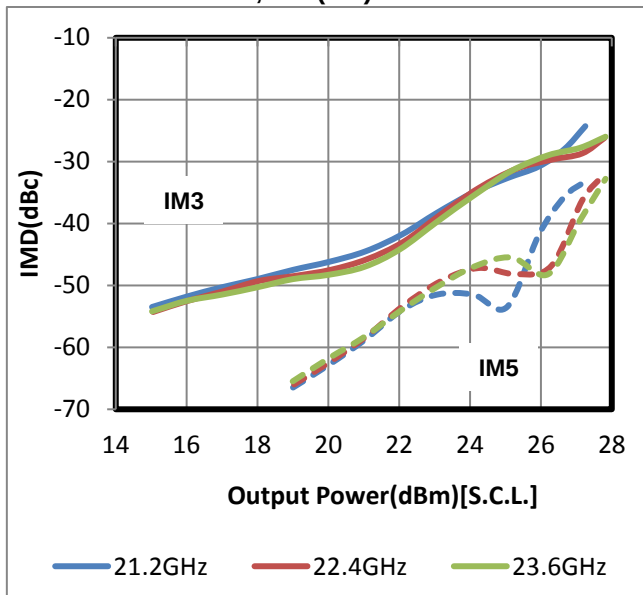


Output Power, Drain Current vs. Input Power
by Drain Voltage

@IDD(DC)=1400mA, Freq=21.2GHz

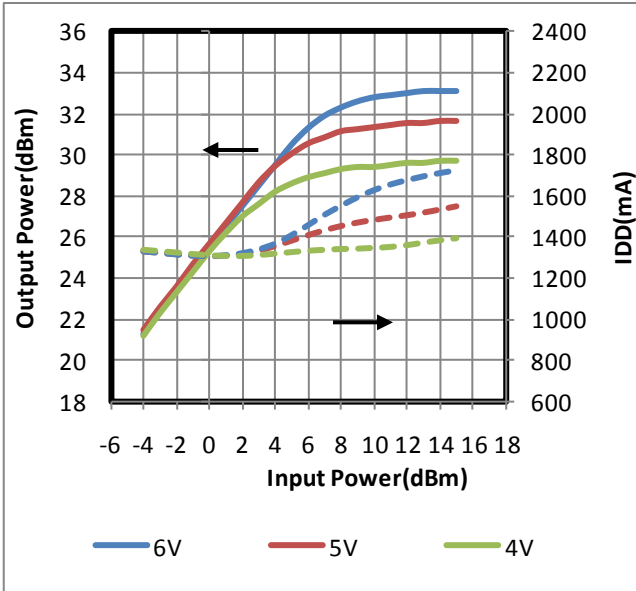


Output Power, Drain Current vs. Input Power
by Drain Voltage

@IDD(DC)=1400mA, Freq=22.4GHz

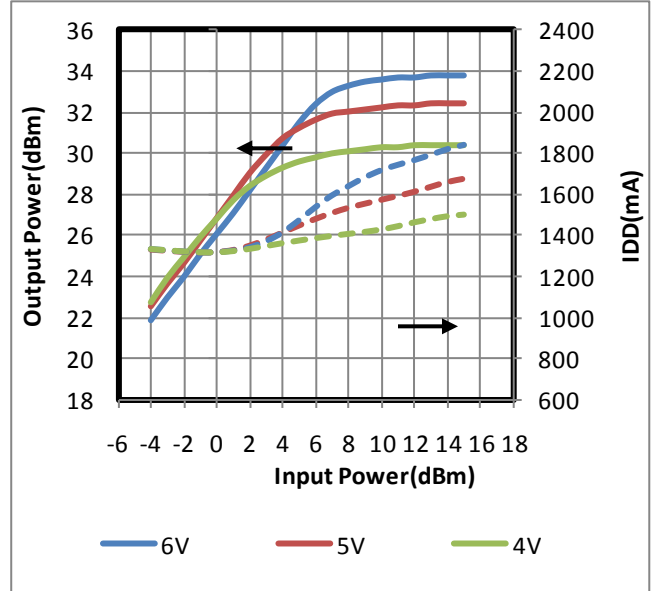


Output Power, Drain Current vs. Input Power
by Drain Voltage

@IDD(DC)=1400mA, Freq=23.6GHz

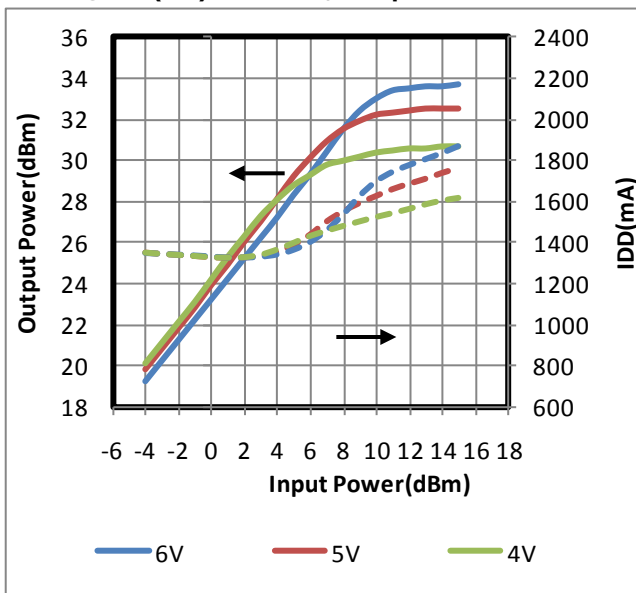


IMD Performance vs. Output Power
by Drain Voltage

@IDD(DC)=1400mA, Freq=21.2GHz

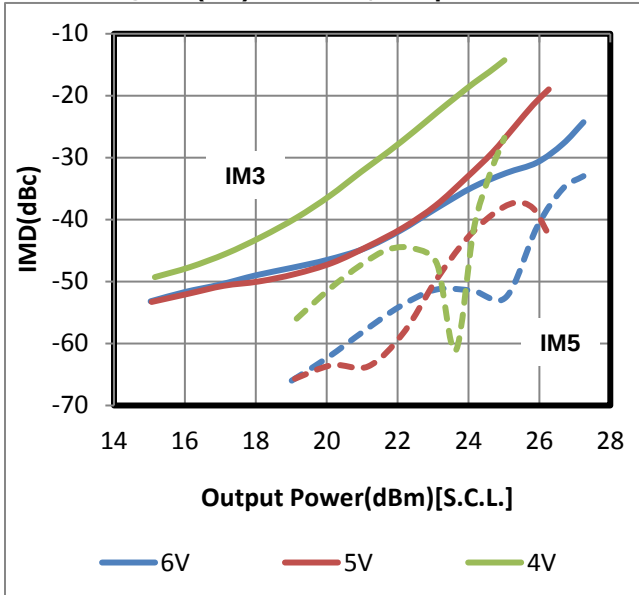


IMD Performance vs. Output Power
by Drain Voltage

@IDD(DC)=1400mA, Freq=23.6GHz

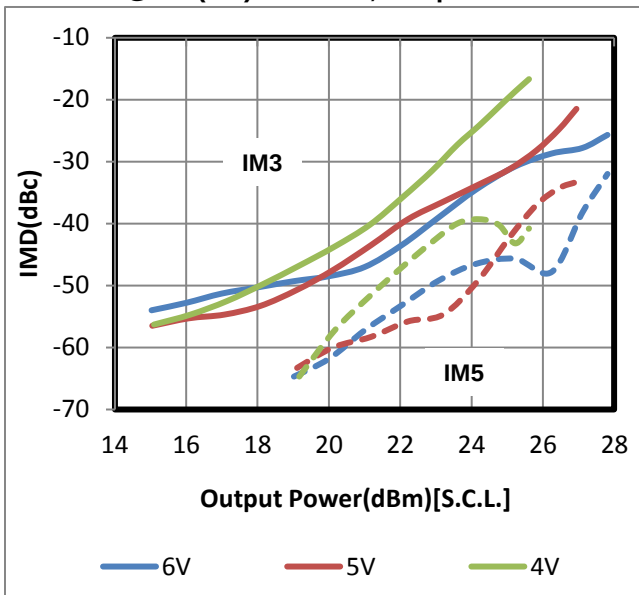


IMD Performance vs. Output Power
by Drain Voltage

@IDD(DC)=1400mA, Freq=22.4GHz

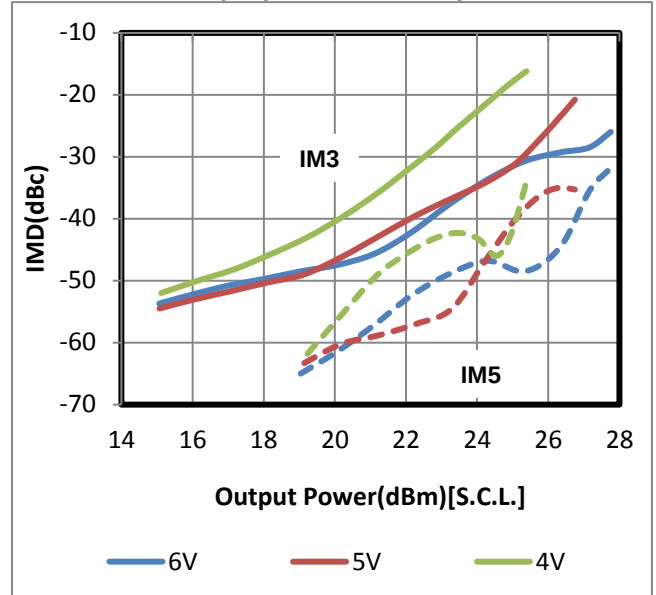


Output Power, Drain Current vs. Input Power
by Drain Current

@VDD=6V, Freq=21.2GHz

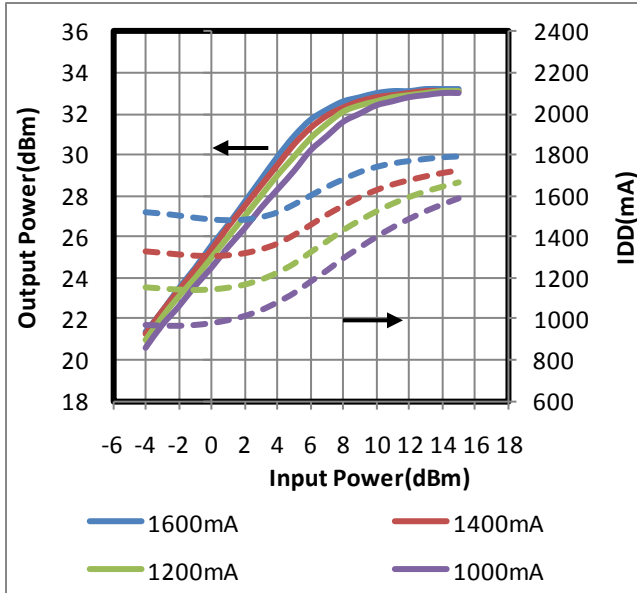


Output Power, Drain Current vs. Input Power
by Drain Current

@VDD=6V, Freq=22.4GHz

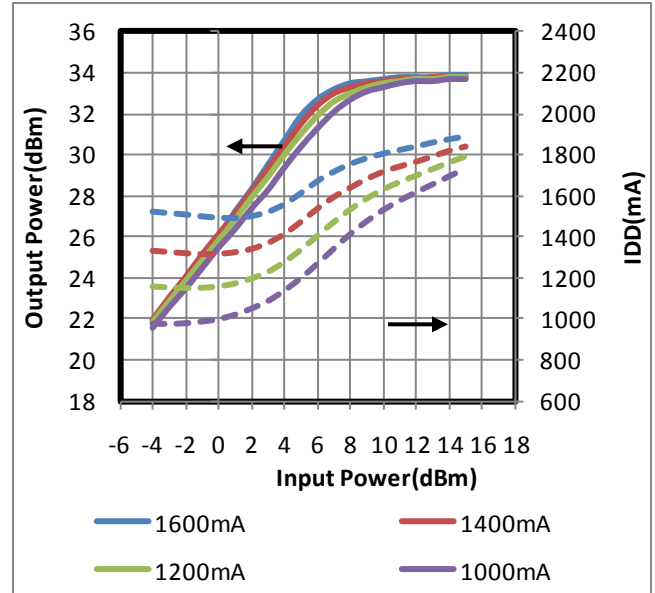


Output Power, Drain Current vs. Input Power
by Drain Current

@VDD=6V, Freq=23.6GHz

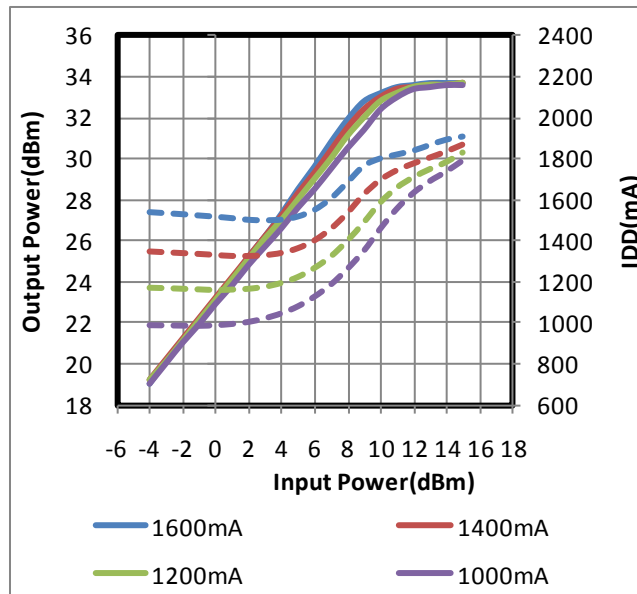


IMD Performance vs. Output Power
by Drain Current

@VDD=6V, Freq=21.2GHz

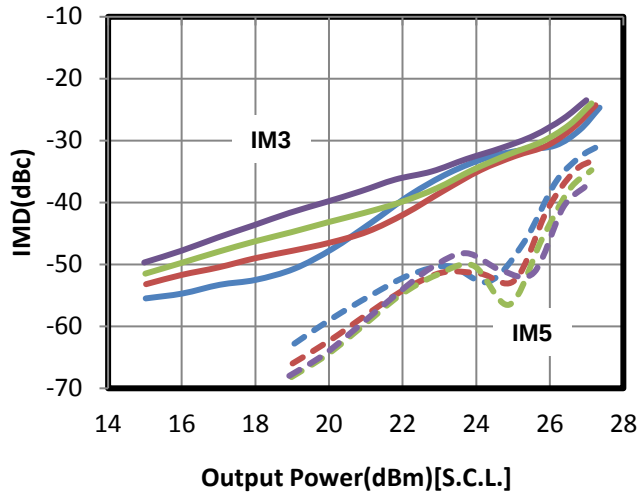


IMD Performance vs. Output Power
by Drain Current

@VDD=6V, Freq=22.4GHz

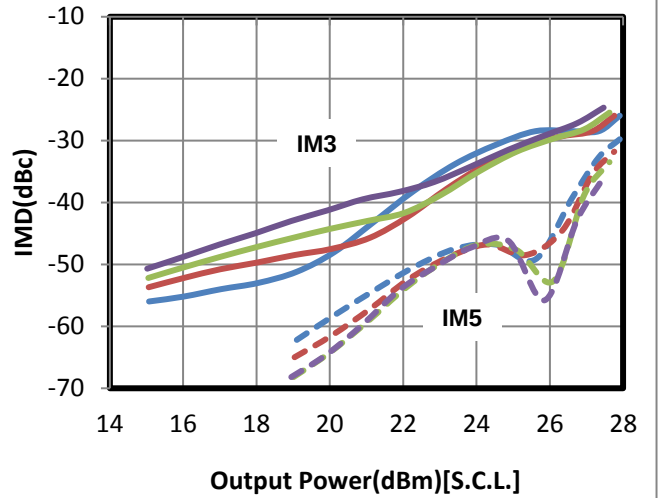


IMD Performance vs. Output Power
by Drain Current

@VDD=6V, Freq=23.6GHz

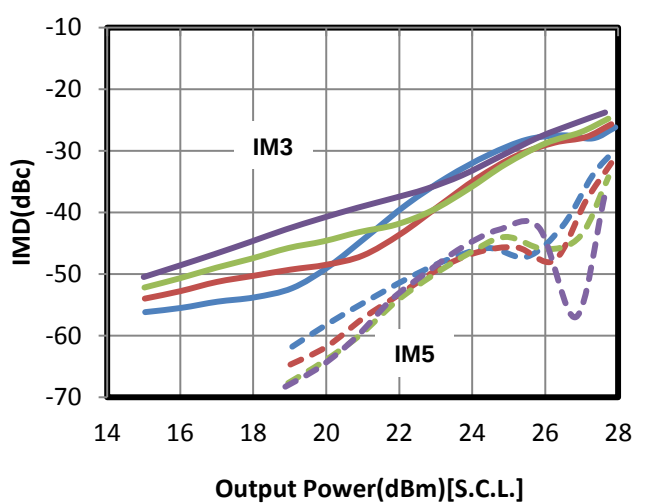


Output Power, Drain Current vs. Input Power
by Temperature

@VDD=6V, IDD=1400mA(@Tc=+25deg.C)
Freq=21.2GHz

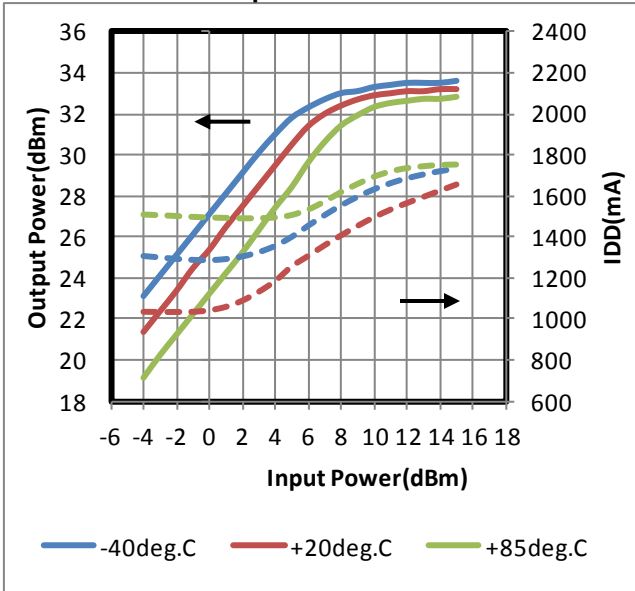

Output Power, Drain Current vs. Input Power
by Temperature


@VDD=6V, IDD=1400mA(@Tc=+25deg.C)
Freq=22.4GHz

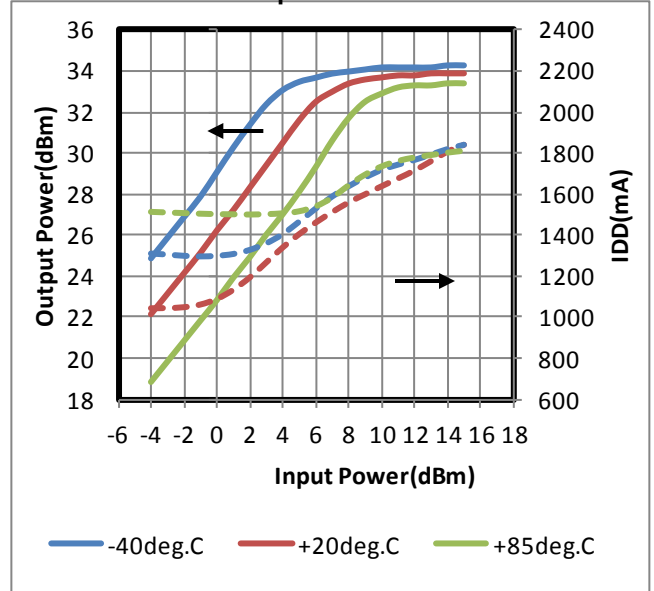

Output Power, Drain Current vs. Input Power
by Temperature


P1dB, G1dB vs. Temperature

@VDD=6V, IDD=1400mA(@Tc=+25deg.C)
Freq=23.6GHz

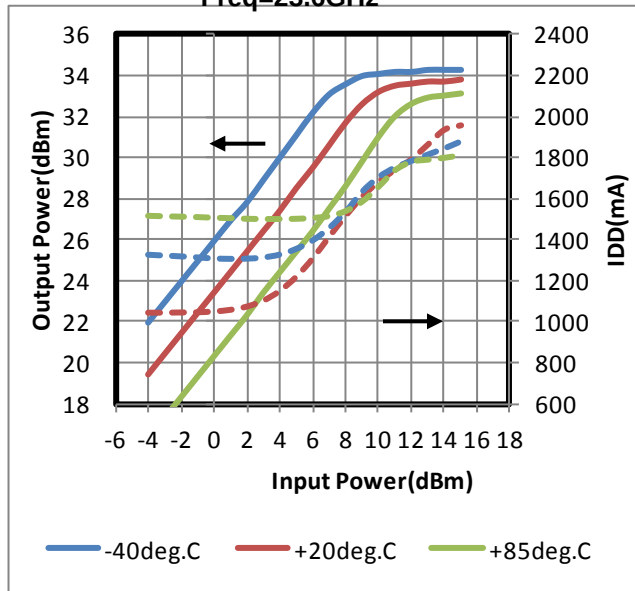


IMD Performance vs. Output Power
by Temperature

@VDD=6V, IDD=1400mA(@Tc=+25deg.C)
Freq=21.2GHz

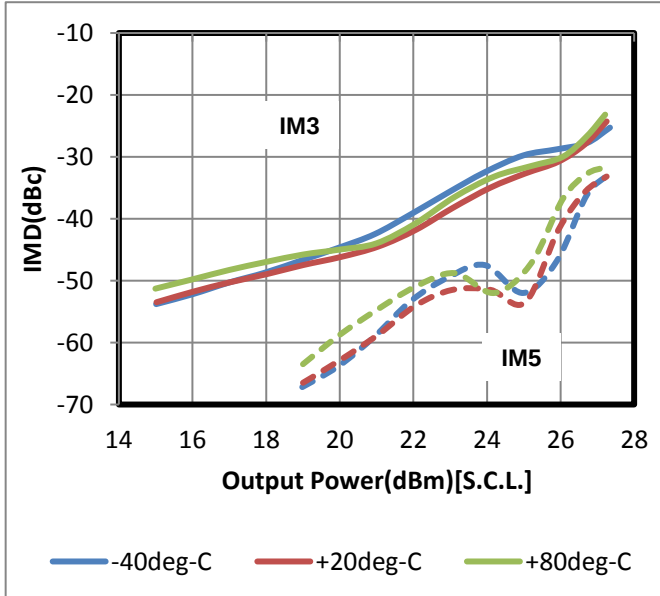


IMD Performance vs. Output Power
by Temperature

@VDD=6V, IDD=1400mA(@Tc=+25deg.C)
Freq=22.4GHz


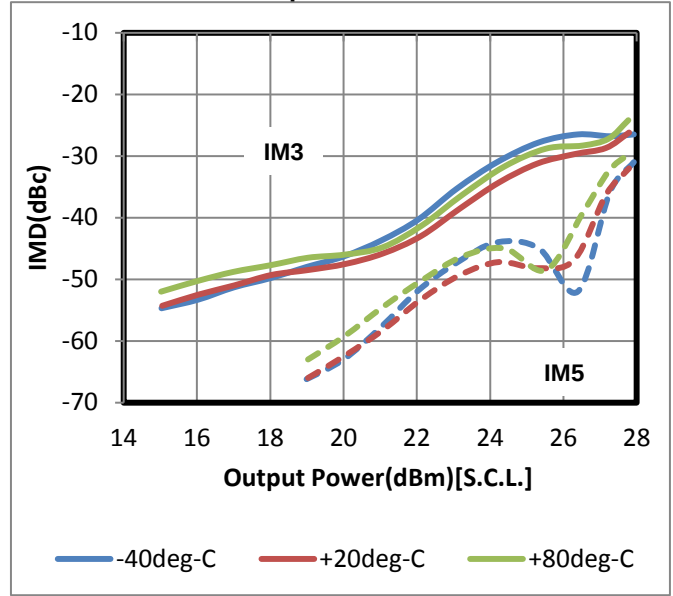


IMD Performance vs. Output Power
by Temperature

@VDD=6V, IDD=1400mA(@Tc=+25deg.C)
Freq=23.6GHz

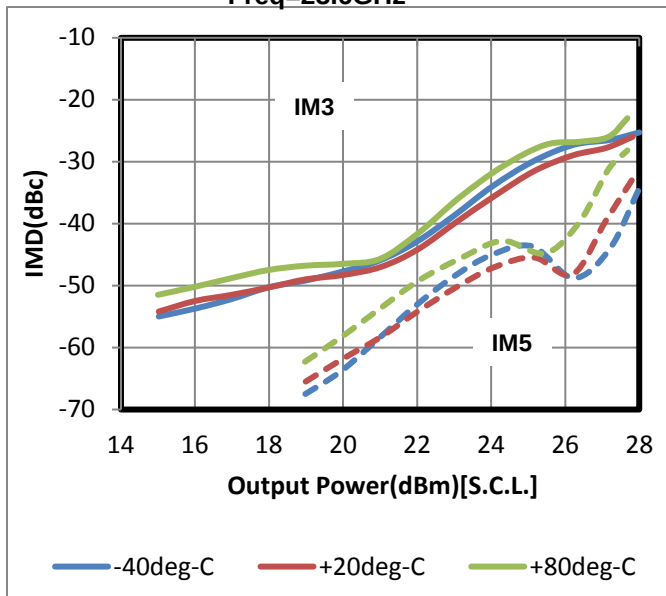


■ S-PARAMETERS

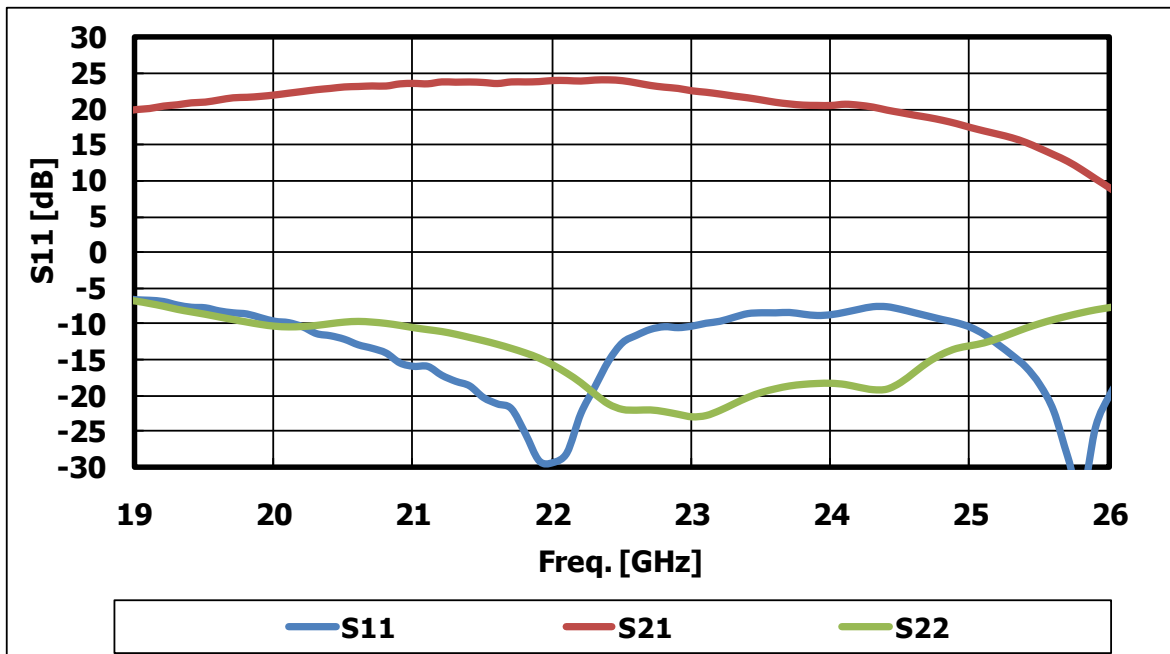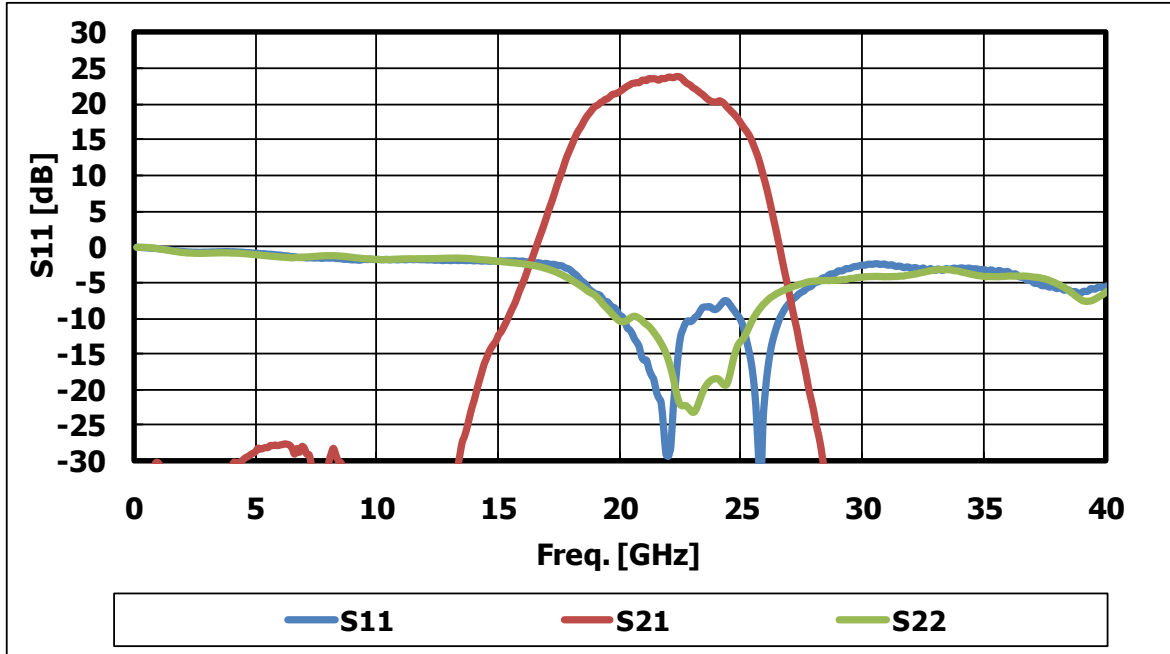


ΔT_{ch} vs. Drain Voltage
(Reference)

$I_{DD}=1400mA$

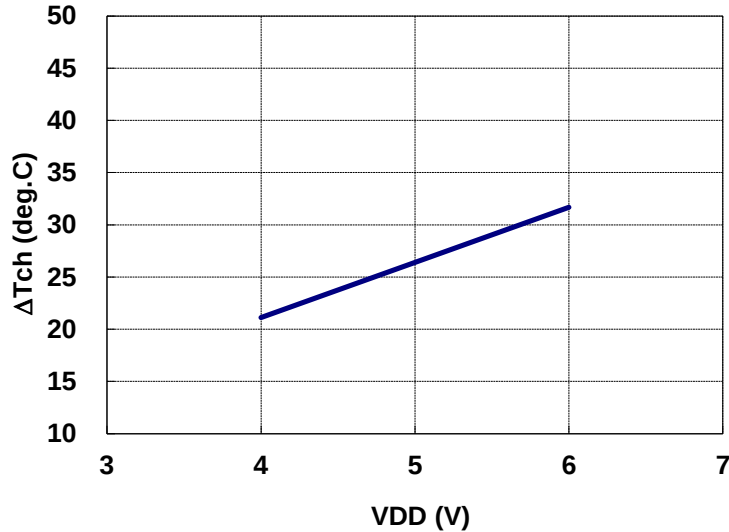


Note: ΔT_{ch} : Temperature Rise from Backside of the Package to Channel.

MTTF vs. T_{ch}

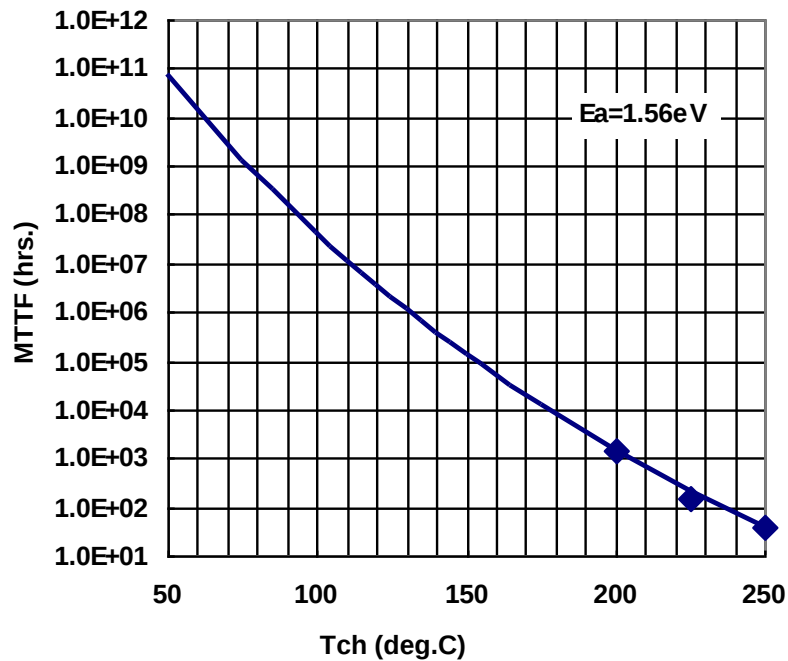


Package Outline and Pin Assignment

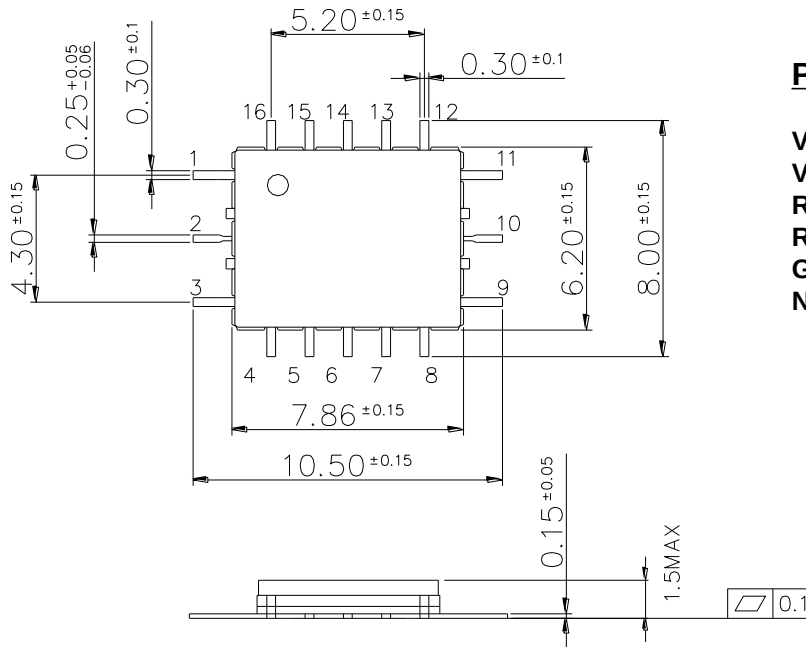


PIN Assignment

VGG : 1, 3
VDD : 5, 6, 7, 13, 14
RF IN : 2
RF OUT : 10
GND : 4, 8, 12, 16
N.C. : 9, 11, 15

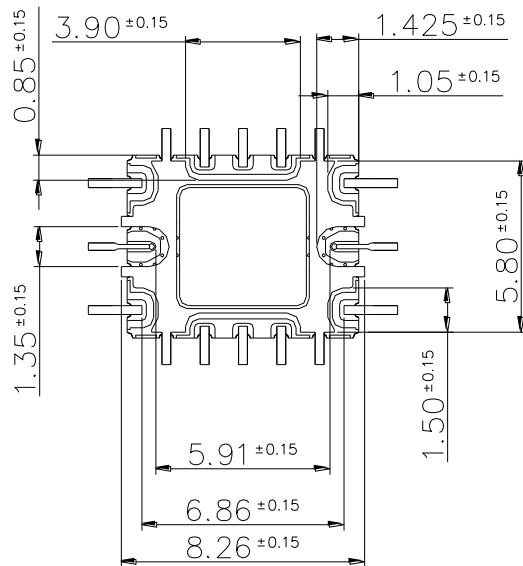

Unit : mm

■ PCB Pads and Solder-resist Pattern

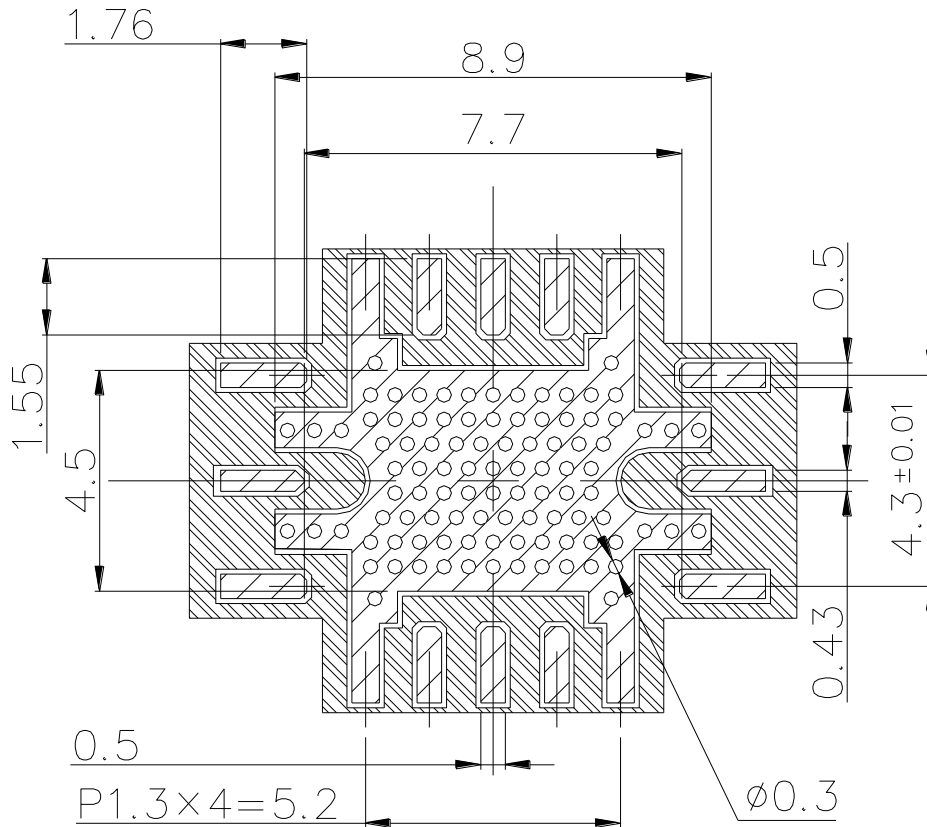


NOTES.

- 1).CORE MATERIAL; Rogers CORP. RO4003
THICKNESS 0.2mm typ., Er=3.38 typ.
- 2).COPPER FOIL THICKNESS 18um typ.
- 3).  ; FINISH COPPER FOIL;Ni 1um min./Au 0.1um max.
- 4).  ; RESIST.

Unit : mm


■ Block Diagram

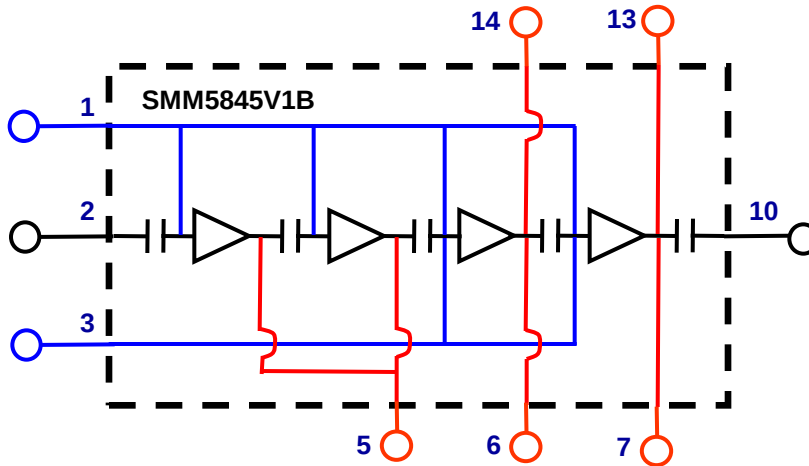

PIN Assignment


VGG : 1, 3
VDD : 5, 6, 7, 13, 14
RF IN : 2
RF OUT : 10
GND : 4, 8, 12, 16
N.C. : 9, 11, 15

■ Recommended Bias Network

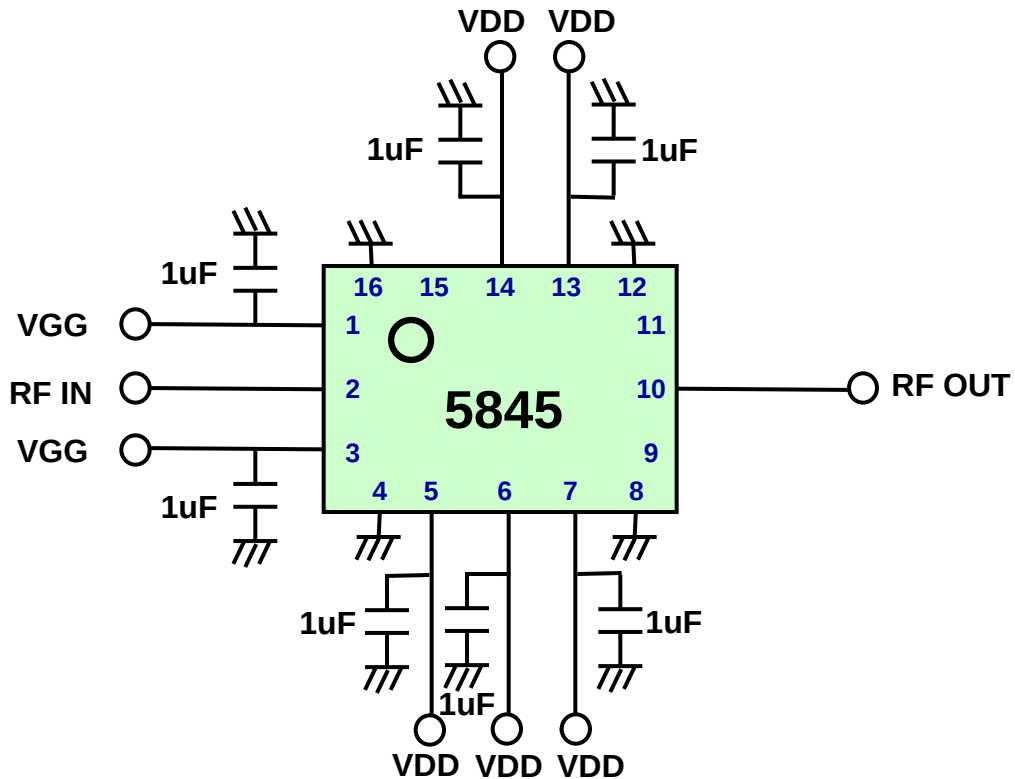

NOTE: All the VDD and VGG should be biased.

■ Marking Information

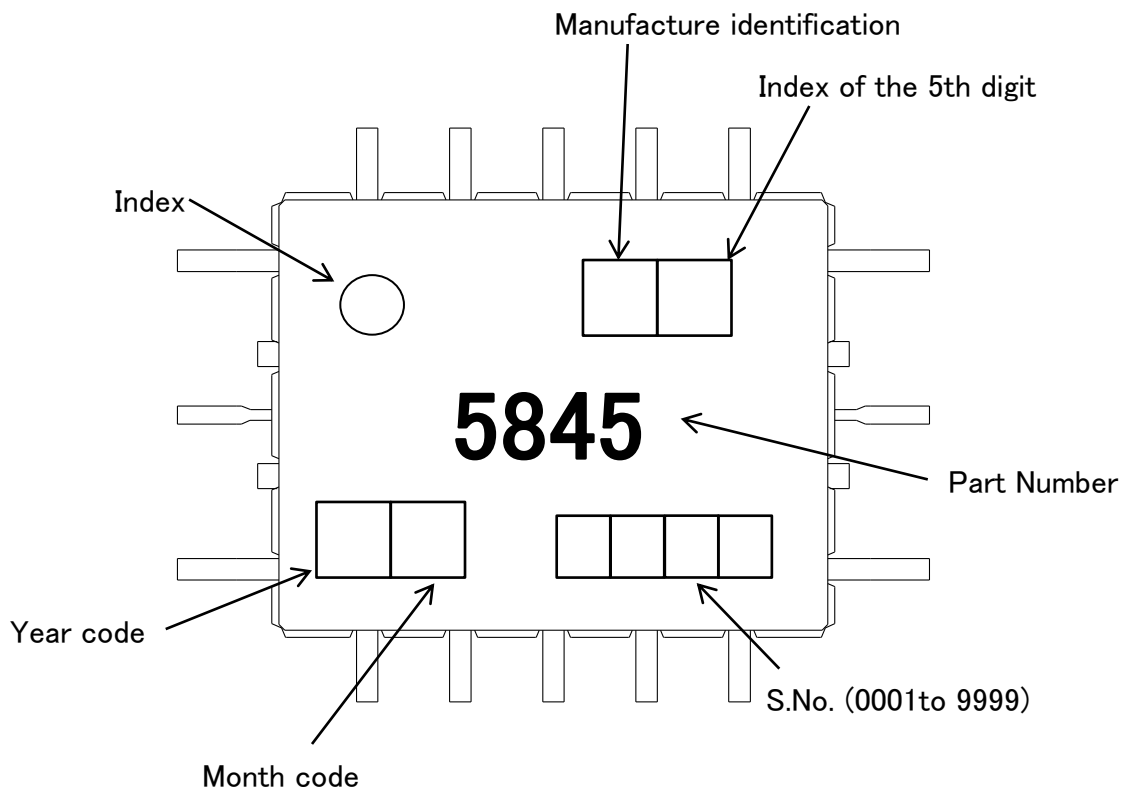


<Year code>

Code	T	U	V	W	X	Y	Z	A	B
Year	2011	2012	2013	2014	2015	2016	2017	2018	2019

<Month code>


Code	H	M	N	P	R	S	T	U	W	X	Y	Z
Month	1	2	3	4	5	6	7	8	9	10	11	12

■ 4-inch Tray Packing (Part No. : SMM5845V1B)

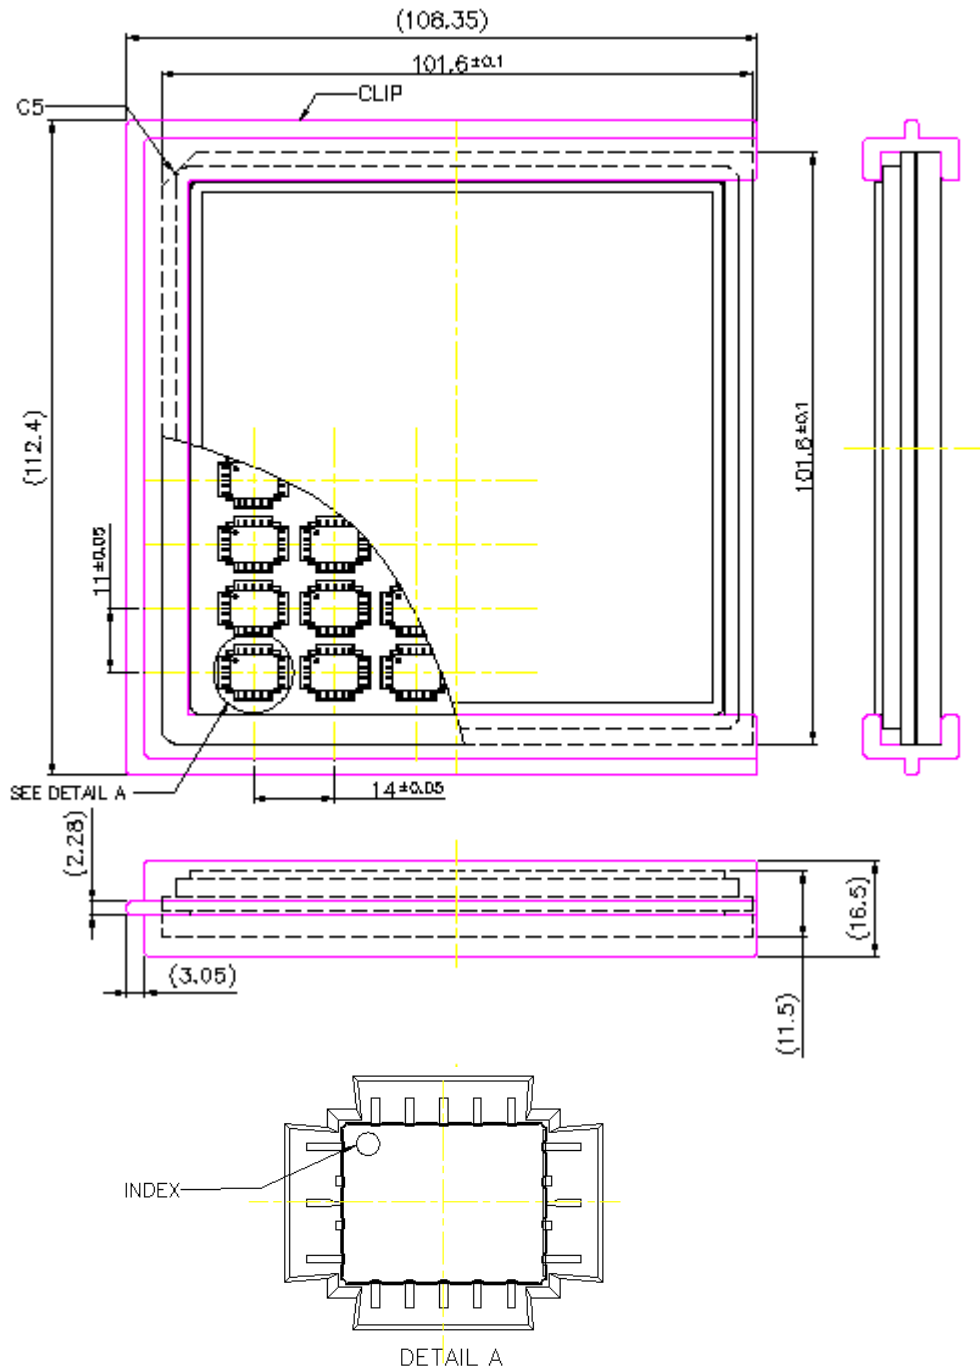

- (1) Maximum Quantity : 48pcs. / Tray
(2) Tray Material : Conductive PS

■ Tape and Reel Packing (Part No. : SMM5845V1BT)

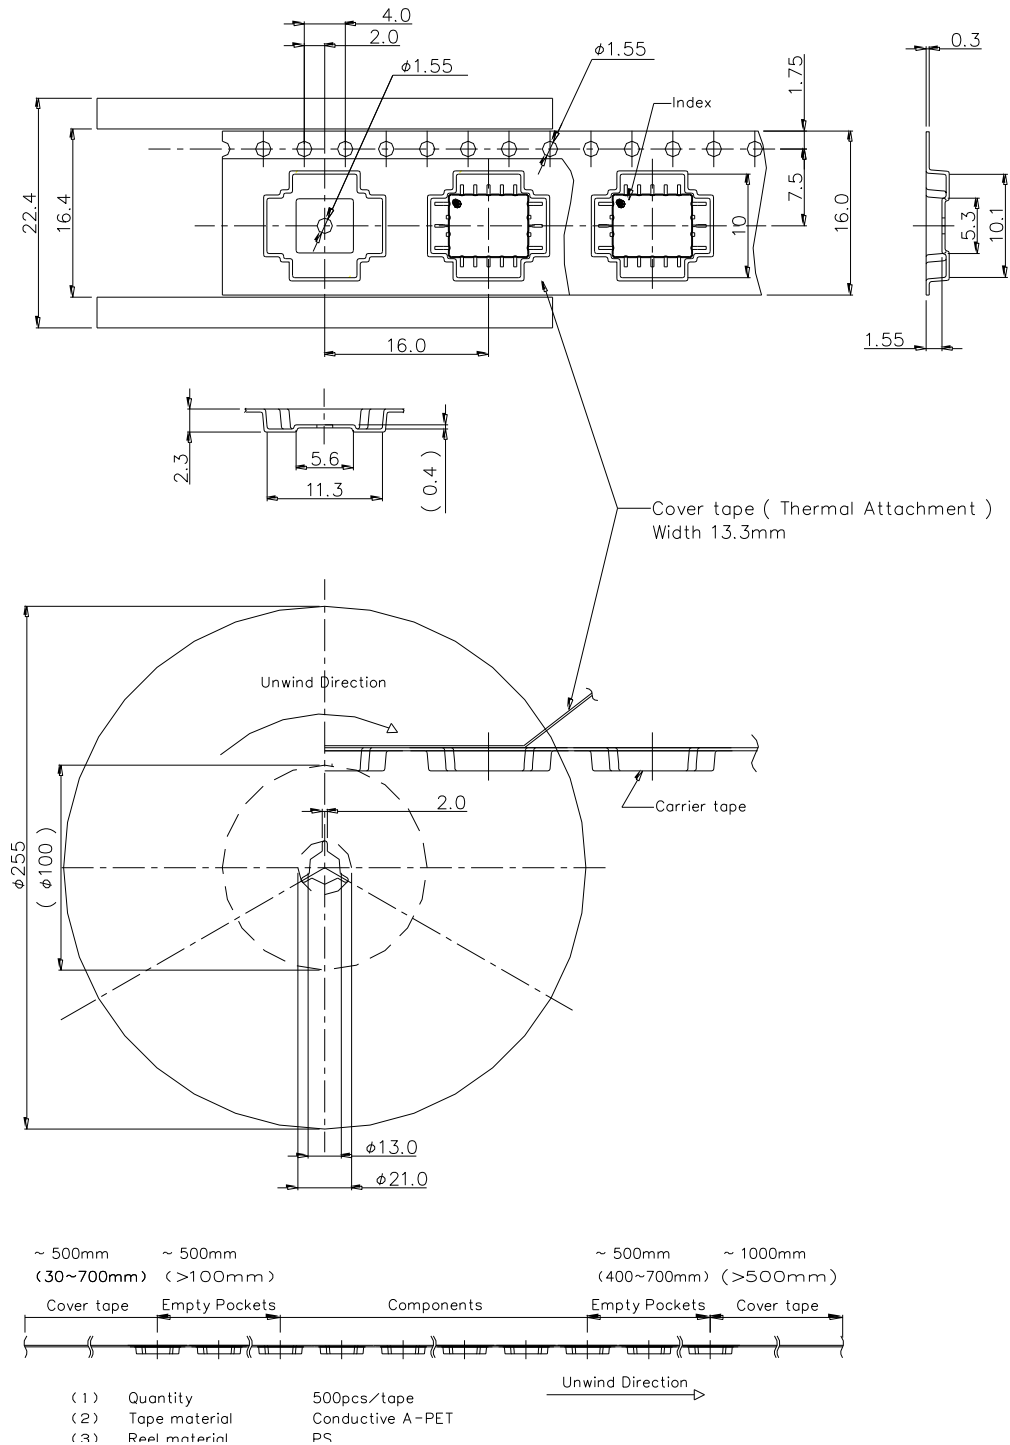

■ Mounting Method of SMD(Surface Mount Devices) for Lead-free solder


Mounting Condition

- (1) For soldering, Lead-free solder (Sn-3.0Ag-0.5Cu)*1 or equivalent shall be used.
(*1: The figure displays with weight %. A predominantly tin-rich alloy with 3.0% silver and 0.5% copper.)
- (2) A rosin type flux with a chlorine content of 0.2% or less shall be used. The rosin flux with low halogen content is recommended.
- (3) When soldering, use one of the following time / temperature methods for acceptable solder joints. Make sure the devices have been properly prepared with flux prior soldering.

* Reflow soldering method (Infrared reflow / Heat circulation reflow / Hot plate reflow):

Limit solder to 3 reflow cycles because resin is used in the modules manufacturing process. Excessive reflow cycles will effect the resin resulting in a potential failure or latent defect. The recommended reflow temperature profile is shown below. The temperature of the reflow profile must be measured at the device body surface.

Reflow temperature profile and condition:

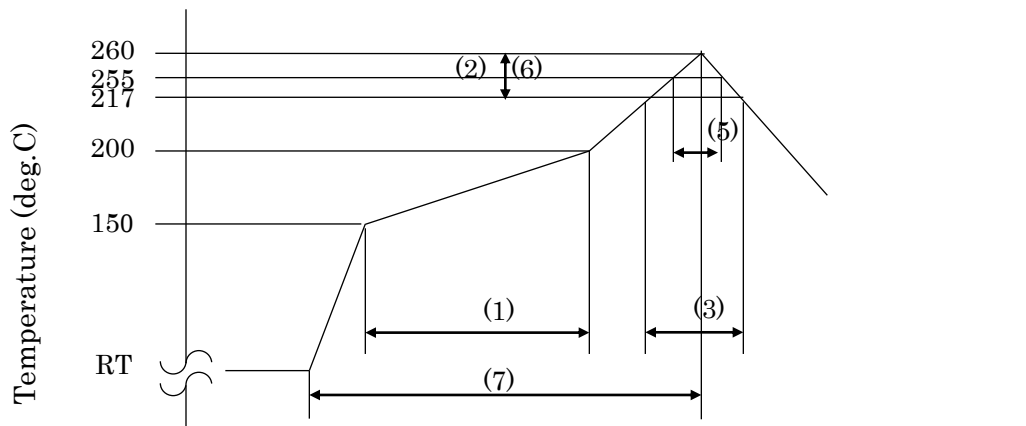

- | | |
|---|-------------------------------------|
| (1) Preheating: | 150 to 200 deg.C, 60 to 120 seconds |
| (2) Ramp-up Rate: | 3 deg.C /seconds max |
| (3) Liquidous temperature and time: | 217 deg.C, 60 to 150 seconds |
| (4) Peak Temperature: | 260 deg.C |
| (5) Time Peak Temperature within 5 deg.C: | < 30seconds |
| (6) Ramp-down Rate: | 6 deg.C /seconds max |
| (7) Time RT to peak temperature: | 8 minutes max |

* Measurement point: Center of the package body surface

(4) The above-recommended conditions were confirmed using the manufacture's equipment and materials. However, when soldering these products, the soldering condition should be verified by customer using their equipment and materials.

For further information please contact:

<http://global-sei.com/Electro-optic/about/office.html>

CAUTION

This product contains **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not put these products into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.