

Small kVA 3 Phase Isolation Transformer**TT1492-TT1498**

VA:	350, 500, 750, 1000, 1500 2000, 3000	Phase:	Three-Phase
Input Voltage:	600 Delta	Frequency:	60 Hz
Output Voltage:	240 Delta	BIL:	4 kV
Taps:	See wiring diagram	Coils:	Copper
Insulation Class:	Class F 155° C	Temp Rise:	N/A
Impedance:	2.5 - 3.5%		

NEMA 1 Enclosure

10 Full 10 Year Warranty**Feature Highlights**

10 Year Warranty
UL Listed
CSA Approved

- Copper windings
- 1.5 to 2 week build time
- Solidly fixed terminals with standard combination slotted Robertson head screw connections facilitate wiring.
- Built with heat-proof insulation for compact size and long life.
- Unique bobbin-wound coils for greater efficiency, superior heat evacuation, and compact structure.

Optional Features

- NEMA 4/4x
- Encapsulation
- Other voltages/multiple tap
- Electrostatic shield

Please call us for additional options.


Small kVA 3 Phase Isolation Transformer

TT1492-TT1498

60 Hz

TT1492	350 VA
TT1493	500 VA
TT1494	750 VA
TT1495	1000 VA
TT1496	1500 VA
TT1497	2000 VA
TT1498	3000 VA

Wiring Connection		
Pri. Volts	Connect Taps	Line Leads
600	1- H1 & 2- H2 & 3 - H3	H1, H2, H3
Sec. Volts	Connect Taps	Line Leads
240	1- X1 & 2- X2 & 3 - X3	X1, X2, X3

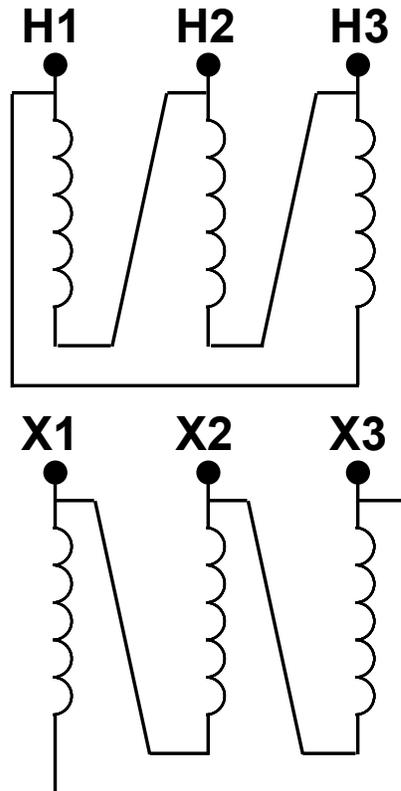


Small kVA 3 Phase Isolation Transformer

TT1492-TT1498

Enclosed Units

VA	350	500	750	1000	1500	2000	3000
Part # 60 Hz	TT1492	TT1493	TT1494	TT1495	TT1496	TT1497	TT1498
Enclosure #	1	1	2	2	2	2	2
Enclosure Weight (lbs.)	22	24	37	40	54	60	69

No. 1 ENCLOSURE (With 4 x 0.5" mounting holes)

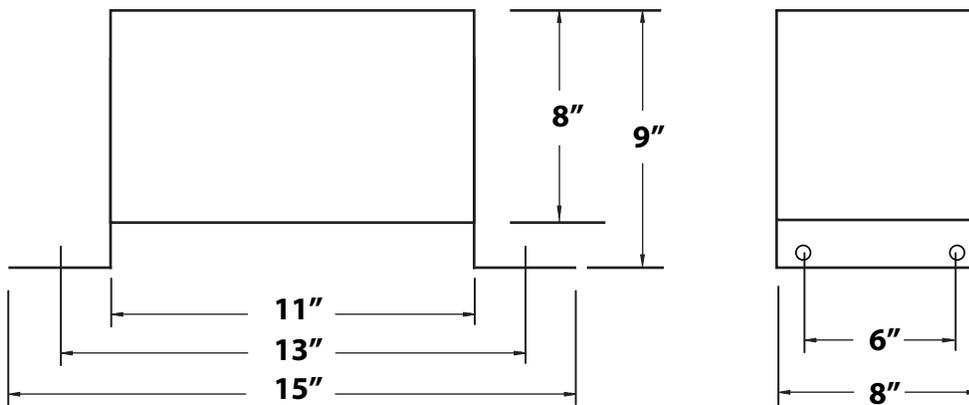

No. 2 ENCLOSURE (With 4 x 0.5" mounting holes)

