



PRODUCT SUMMARY

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
60	55m Ω	22A



1.GATE
2.DRAIN
3.SOURCE

ABSOLUTE MAXIMUM RATINGS ($T_C = 25\text{ }^{\circ}\text{C}$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNITS
Drain-Source Voltage		V_{DS}	60	V
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current	$T_C = 25\text{ }^{\circ}\text{C}$	I_D	22	A
	$T_C = 70\text{ }^{\circ}\text{C}$		18	
Pulsed Drain Current ¹		I_{DM}	80	
Power Dissipation	$T_C = 25\text{ }^{\circ}\text{C}$	P_D	50	W
	$T_C = 70\text{ }^{\circ}\text{C}$		32	
Operating Junction & Storage Temperature Range		T_j, T_{stg}	-55 to 150	$^{\circ}\text{C}$
Lead Temperature (¹ / ₁₆ " from case for 10 sec.)		T_L	275	

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Case	$R_{\theta JC}$		2.5	$^{\circ}\text{C} / \text{W}$
Junction-to-Ambient	$R_{\theta JA}$		55	$^{\circ}\text{C} / \text{W}$

¹Pulse width limited by maximum junction temperature.

ELECTRICAL CHARACTERISTICS ($T_C = 25\text{ }^{\circ}\text{C}$, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	60			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	1	1.5	2.5	
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0V, V_{GS} = \pm 20V$			± 250	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 48V, V_{GS} = 0V$			1	μA
		$V_{DS} = 40V, V_{GS} = 0V, T_J = 55\text{ }^{\circ}C$			10	
On-State Drain Current ¹	$I_{D(ON)}$	$V_{DS} = 5V, V_{GS} = 10V$	22			A
Drain-Source On-State Resistance ¹	$R_{DS(ON)}$	$V_{GS} = 4.5V, I_D = 8A$		59	75	mΩ
		$V_{GS} = 10V, I_D = 10A$		42	55	







Forward Transconductance ¹	g_{fs}	$V_{DS} = 10V, I_D = 10A$		14		S
---------------------------------------	----------	---------------------------	--	----	--	---






DYNAMIC							
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = 25V, f = 1MHz			587		pF
Output Capacitance	C _{oss}				80		
Reverse Transfer Capacitance	C _{rss}				46		
Total Gate Charge ²	Q _g	V _{DS} = 0.5V _{(BR)DSS} , V _{GS} = 10V, I _D = 10A			12.5		nC
Gate-Source Charge ²	Q _{gs}				1.8		
Gate-Drain Charge ²	Q _{gd}				3.7		
Turn-On Delay Time ²	t _{d(on)}	V _{DD} = 30V I _D ≅ 1A, V _{GS} = 10V, R _{GEN} = 6Ω			11		nS
Rise Time ²	t _r				8		
Turn-Off Delay Time ²	t _{d(off)}				19		
Fall Time ²	t _f				6		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (T _c = 25 °C)							
Continuous Current	I _S					22	A
Forward Voltage ¹	V _{SD}	I _F = 1A, V _{GS} = 0V				1	V

¹Pulse test : Pulse Width $\leq 300 \mu sec$, Duty Cycle $\leq 2\%$.

²Independent of operating temperature.

REMARK: THE PRODUCT MARKED WITH "P5506BDG", DATE CODE or LOT #

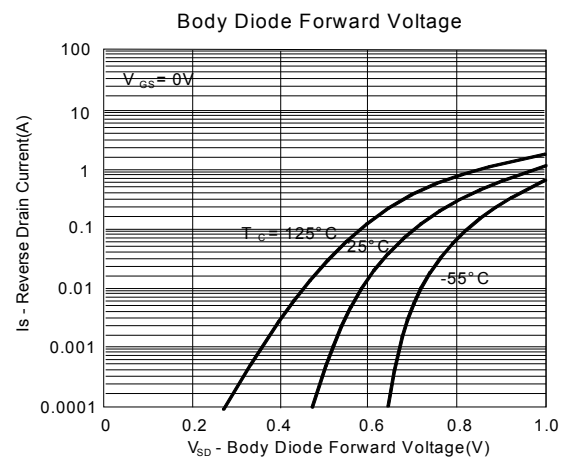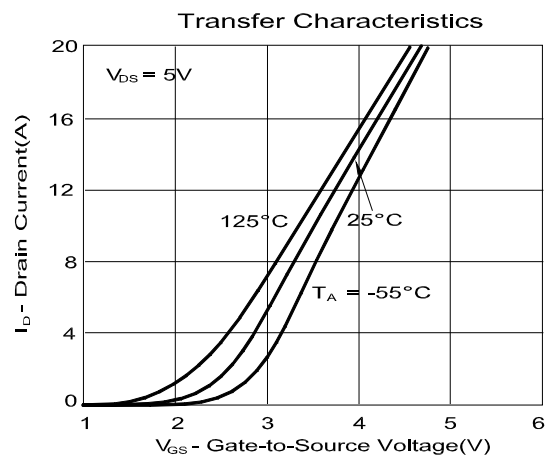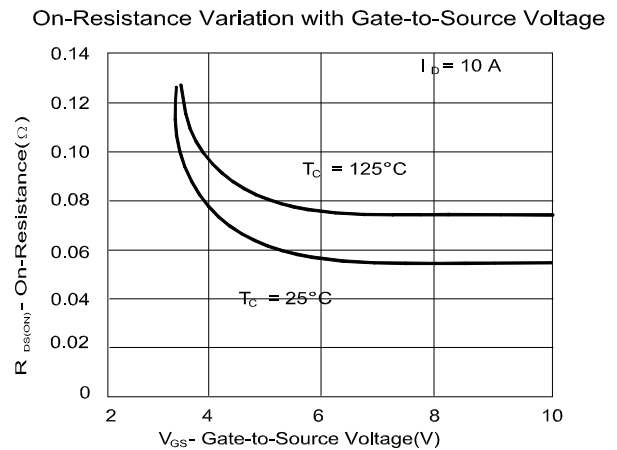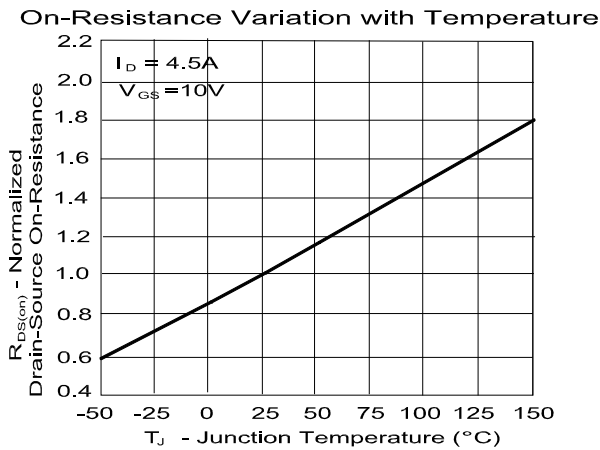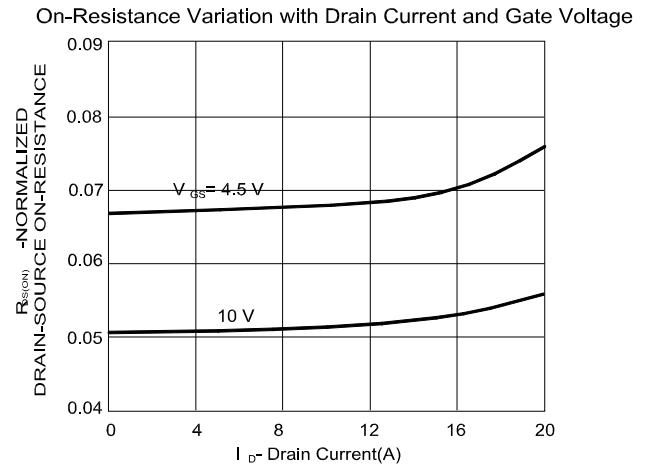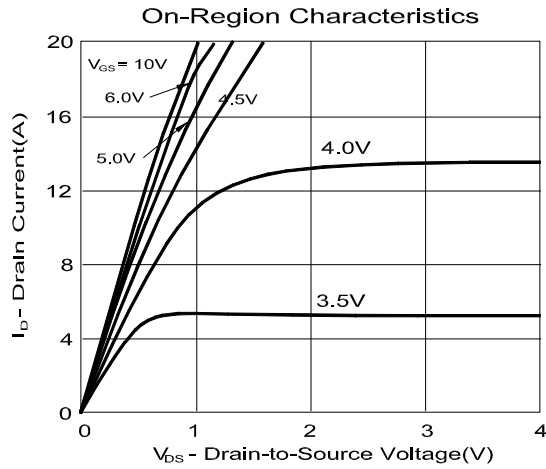

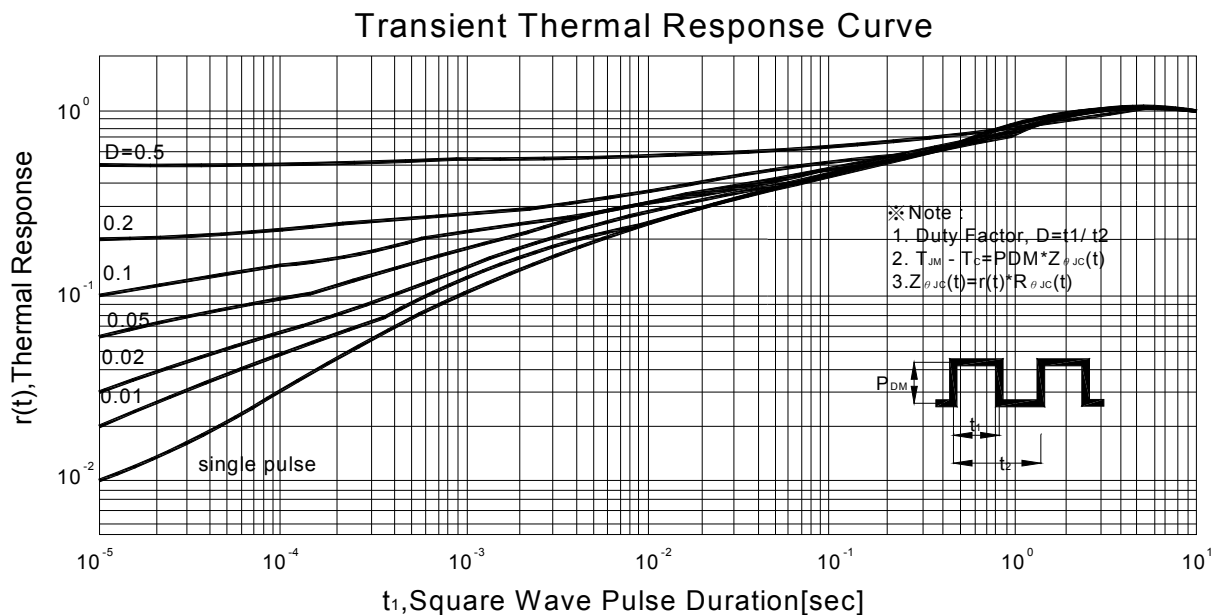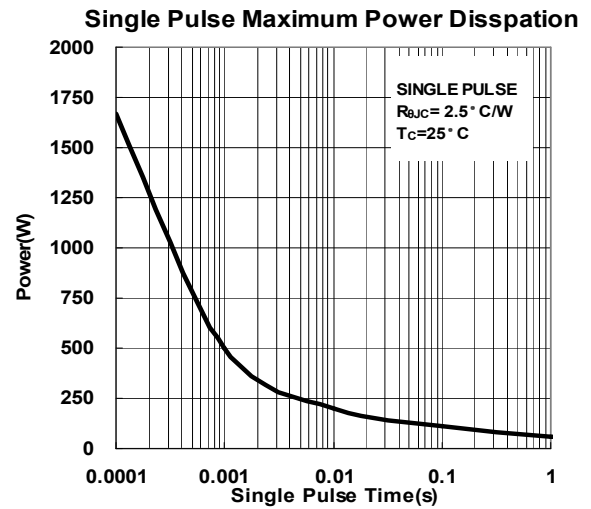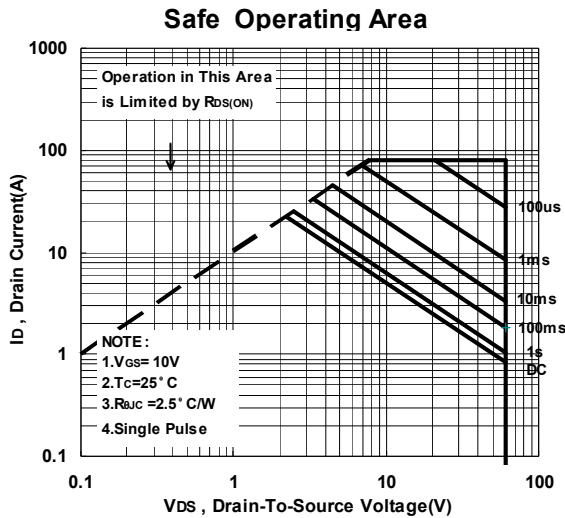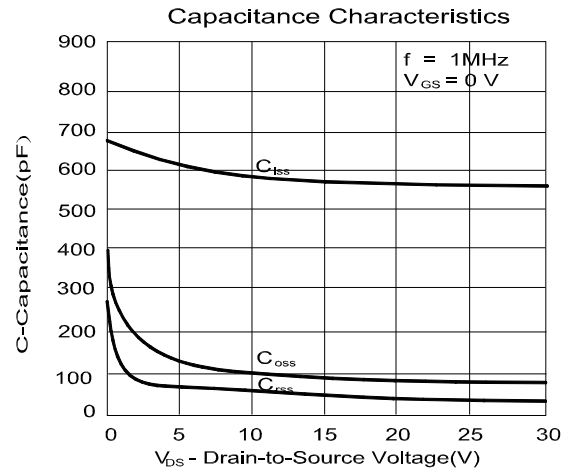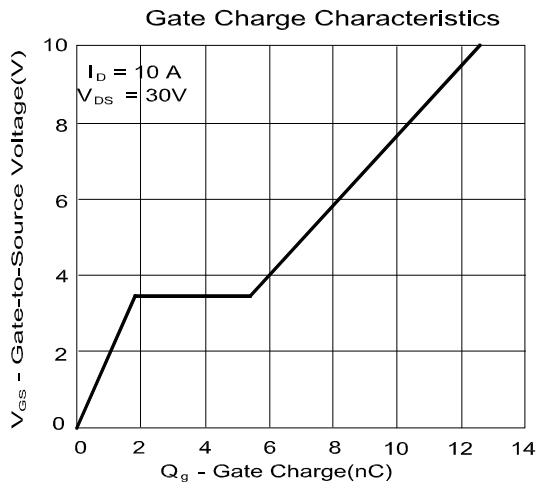

TO-252 (DPAK) MECHANICAL DATA

Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	8.9	9.5	10.4	H	0.8	1.27	2.03
B	2.19	2.3	2.435	I	6.35	6.6	6.8
C	0.35	0.5	0.65	J	4.8	5.34	5.5
D	0.89		1.5	K	0.5		1.5
E	0.35		0.65	L	0.4	0.76	0.89
F	0.0		0.23	M	3.96		5.18
G	5.4		6.2	N			

