

ZENER VOLTAGE REGULATOR DIODES

MMSZ4V7 - 56V

SOD-123
PLASTIC PACKAGE



For High Density Applications

Polarity: - Cathode indicated by polarity band

ABSOLUTE MAXIMUM RATINGS

DESCRIPTION	SYMBOL	VALUE	UNIT
Power Dissipation on FR-5 Board at $T_L=75^\circ\text{C}$ (Note 1)	P_D	500	mW
Derated Above 75°C		6.7	mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient (Note 2)	$R_{th(j-a)}$	340	$^\circ\text{C/W}$
Thermal Resistance, Junction to Lead (Note 2)	$R_{th(j-l)}$	150	$^\circ\text{C/W}$
Operating and Storage Junction Temperature Range	T_j, T_{stg}	- 55 to +150	$^\circ\text{C}$

Note1. FR-5=3.5 x 1.5 inches

Note2. Thermal Resistance measured obtained via infrared Scan Method

Forward Voltage at $I_F=10\text{mA}$ <0.9V and <1.5V at 200mA

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless specified otherwise)

Device	V_{Z1} (V) Notes 3 and 4 at $I_{ZT1}=5\text{mA}$			Z_{ZT1} (Note5)	V_{Z2} (V) Notes 3 and 4 at $I_{ZT2}=1\text{mA}$		Z_{ZT2} (Note 5)	Max Reverse Current		Marking
	min	nom	max	(W) at $I_{ZT1}=5\text{mA}$ max	min	max	(W) at $I_{ZT2}=1\text{mA}$ max	I_R at mA Max	V_R (V)	
MMSZ4V7	4.47	4.7	4.94	80	3.7	4.7	500	3.0	2.0	U3
MMSZ5V1	4.85	5.1	5.36	60	4.2	5.3	480	2.0	2.0	U4
MMSZ5V6	5.32	5.6	5.88	40	4.8	6.0	400	1.0	2.0	U5
MMSZ6V2	5.89	6.2	6.51	10	5.6	6.6	150	3.0	4.0	V1
MMSZ6V8	6.46	6.8	7.14	15	6.3	7.2	80	2.0	4.0	V2
MMSZ7V5	7.13	7.5	7.88	15	6.9	7.9	80	1.0	5.0	V3
MMSZ8V2	7.79	8.2	8.61	15	7.6	8.7	80	0.7	5.0	V4
MMSZ9V1	8.65	9.1	9.56	15	8.4	9.6	100	0.5	6.0	V5
MMSZ10	9.50	10	10.50	20	9.3	10.6	150	0.2	7.0	A1

Note3. Tolerance of +/- 5% on the nominal Zener Voltage

Note4. Tolerance and Voltage Designation: Zener Voltage (V_Z) is measured with the Zener Current Applied for $PW=1\text{ms}$

Note5. Z_{ZT} and Z_{ZK} are measured by dividing the AC Voltage drop across the device by the AC Current Applied

The specified limits are for $I_{Z(AC)}=0.1 I_{Z(DC)}$ with the AC frequency =1KHz

MMSZ4V7_56Rev_1 050506E



Forward Voltage at $I_F=10\text{mA}$ $<0.9\text{V}$ and $<1.5\text{V}$ at 200mA

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless specified otherwise)

Device	V_{Z1} (V) Notes 3 and 4 at $I_{ZT1}=5\text{mA}$			Z_{ZT1} (Note 5)	V_{Z2} (V) Notes 3 and 4 at $I_{ZT2}=1\text{mA}$		Z_{ZT2} (Note 5)	Max Reverse Current		Marking
	min	nom	max	(W) at $I_{ZT1}=5\text{mA}$ max	min	max	(W) at $I_{ZT2}=1\text{mA}$ max	I_R at mA Max	V_R (V)	
MMSZ11	10.45	11	11.55	20	10.2	11.6	150	0.1	8.0	A2
MMSZ12	11.40	12	12.60	25	11.2	12.7	150	0.1	8.0	A3
MMSZ13	12.35	13	13.65	30	12.3	14.0	170	0.1	8.0	A4
MMSZ15	14.25	15	15.75	30	13.7	15.5	200	0.05	10.5	A5
MMSZ16	15.20	16	16.80	40	15.2	17.0	200	0.05	11.2	X1
MMSZ18	17.10	18	18.90	45	16.7	19.0	225	0.05	12.6	X2
MMSZ20	19.00	20	21.00	55	18.7	21.1	225	0.05	14	X3
MMSZ22	20.90	22	23.10	55	20.7	23.2	250	0.05	15.4	X4
MMSZ24	22.80	24	25.20	70	22.7	25.5	250	0.05	16.8	X5

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless specified otherwise)


Device	V_{Z1} (V) Notes 3 and 4 at $I_{ZT1}=2\text{mA}$			Z_{ZT1} (Note 5)	V_{Z2} (V) Notes 3 and 4 at $I_{ZT2}=0.1\text{mA}$		Z_{ZT2} (Note 5)	Max Reverse Current		Marking
	min	nom	max	(W) at $I_{ZT1}=2\text{mA}$ max	min	max	(W) at $I_{ZT2}=0.5\text{mA}$ max	I_R at mA Max	V_R (V)	
MMSZ27	25.65	27	28.35	80	25.0	28.9	300	0.05	18.9	Y1
MMSZ30	28.50	30	31.50	80	27.8	32.0	300	0.05	21.0	Y2
MMSZ33	31.35	33	34.65	80	30.8	35.0	325	0.05	23.1	Y3
MMSZ36	34.20	36	37.80	90	33.8	38.0	350	0.05	25.2	Y4
MMSZ39	37.05	39	40.95	130	36.7	41.0	350	0.05	27.3	Y5
MMSZ43	40.85	43	45.15	150	39.7	46.0	375	0.05	30.1	Z1
MMSZ47	44.65	47	49.35	170	43.7	50.0	375	0.05	32.9	Z2
MMSZ51	48.45	51	53.55	180	47.6	54.0	400	0.05	35.7	Z3
MMSZ56	53.20	56	58.80	200	51.5	60.0	425	0.05	39.2	Z4

Note3. Tolerance of $\pm 5\%$ on the nominal Zener Voltage

Note4. Tolerance and Voltage Designation: Zener Voltage (V_Z) is measured with the Zener Current Applied for $PW=1\text{ms}$


Note5. Z_{ZT} and Z_{ZK} are measured by dividing the AC Voltage drop across the device by the AC Current Applied

The specified limits are for $I_{Z(AC)}=0.1 I_{Z(DC)}$ with the AC frequency $=1\text{kHz}$

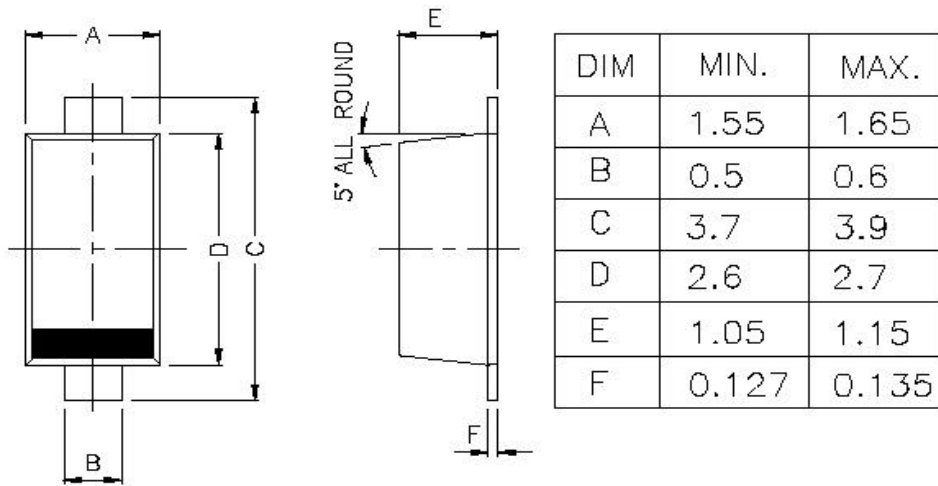PACKAGE SOD-123 FL

All dimensions are in mm

CATHODE IS MARKED BY BAND

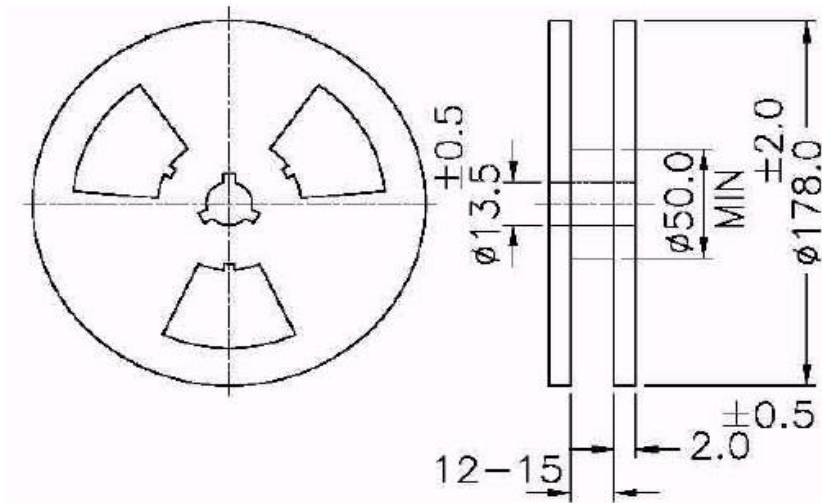

ALL DIMENSIONS ARE IN mm
 REEL $\varnothing$ 178 mm (7")
 3000 Pcs / REEL

Component Disposal Instructions

1. CDIL Semiconductor Devices are RoHS compliant, customers are requested to please dispose as per prevailing Environmental Legislation of their Country.
2. In Europe, please dispose as per EU Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE).

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.

Telephone + 91-11-2579 6150, 4141 1112 Fax + 91-11-2579 5290, 4141 1119

email@cdil.com www.cdilsemi.com