

500mA Regulator

Monolithic IC MM156□□F

Outline

This IC is a small, stable power supply with output voltage precision of $\pm 2\%$ (when $I_o = 250\text{mA}$), maximum output current of 500mA, and I/O voltage difference of 0.3V typ. at 250mA.
 Output noise reduction and output ON/OFF control pins are provided, making it ideal for portable equipment.

Features

- | | |
|--------------------------------|--|
| 1. No-load current consumption | 1.9mA typ. |
| 2. I/O voltage difference | 0.3V typ. ($I_o=250\text{mA}$) |
| 3. Ripple rejection rate | 64dB typ. ($f=120\text{Hz}$, $V_{\text{RIPPLE}}=1\text{VP-P}$, $I_o=250\text{mA}$) |
| 4. Output current | 500mA max. |
| 5. Output noise voltage | 75 μVrms typ. |
| 6. Output voltage rank | 1.8 ~ 5.0V (0.1V steps) |
| 7. Output ON/OFF control | High→ON, Low→OFF |


Package

SOP-7B


Applications

1. Cordless telephone
2. Portable equipment, etc.

Pin Assignment


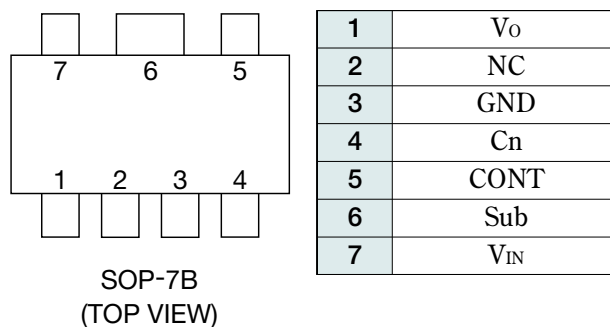


Equivalent Circuit Diagram

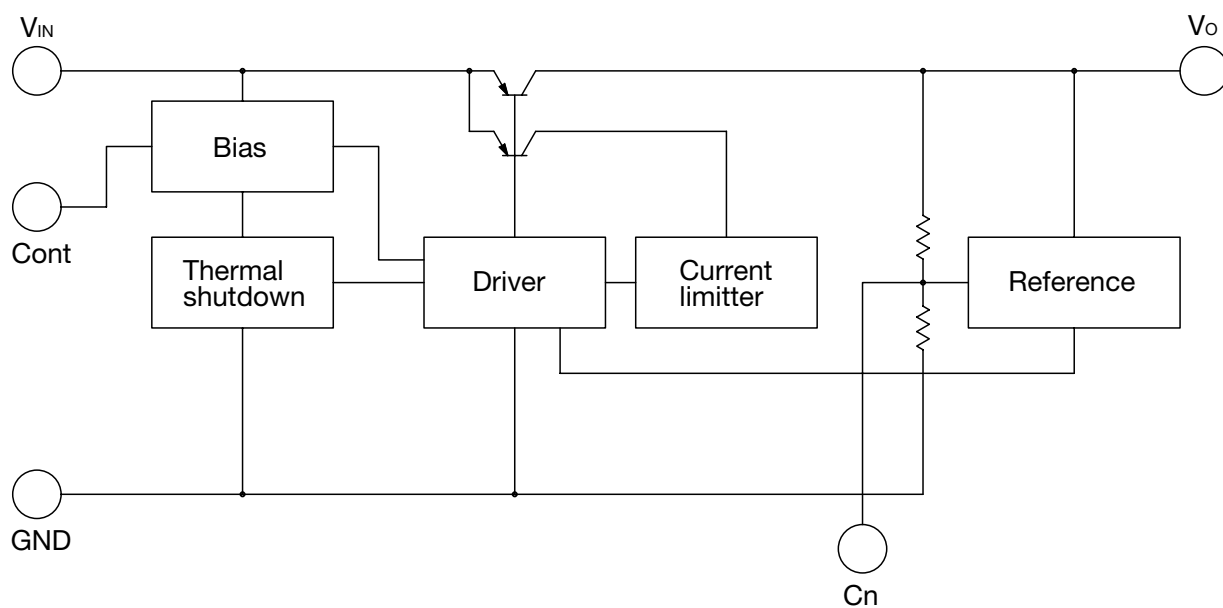

Pin Description

Pin No.	Pin name	Function	Internal equivalent circuit diagram
1	V _{OUT}	Output pin	
2	NC	No connection	
3	GND	Ground	
4	C _n	Noise decrease pin	

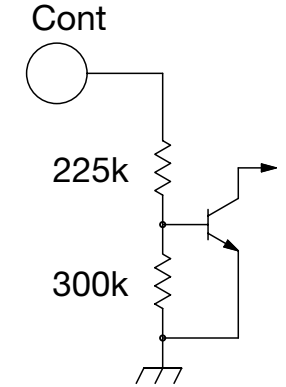Pin No.	Pin name	Function	Internal equivalent circuit diagram						
5	CONT	Control pin <table><tr><td>COUT</td><td>Output</td></tr><tr><td>H</td><td>ON</td></tr><tr><td>L</td><td>OFF</td></tr></table>	COUT	Output	H	ON	L	OFF	
COUT	Output								
H	ON								
L	OFF								
6	Sub	Substrate The 6pin must be connected to GND.							
7	V _{IN}	Input pin							

Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Ratings	Units
Storage temperature	T _{STG}	-40~+150	°C
Supply voltage	V _{IN}	-0.3~+12	V
Allowable loss	P _d	400 (Not attached) 950 (★1)	mW

★1 With the double sided PC Board of glass epoxy
 (Copper plane 80%, 192X142X1.2mm)

Recommended Operating Conditions

Item	Symbol	Ratings	Units
Operating temperature	T _{OPR}	-30~+85	°C
Output current	I _{OUT}	0~500	mA
Operating voltage	V _{OP}	V _O Typ.+0.5~+10	V

Electrical Characteristics 1 (Except where noted therwise, Ta=25°C, VCC=9V)

Item	Symbol	Measurement conditions	Min.	Typ.	Max.	Units
No-Load input current	I _{CC}	I _O =0mA		1.9	5	mA
Input current (OFF)	I _{CCOFF}	V _{CONT} =0V		0	1	μA
Output voltage *3	V _{OUT}	I _O =250mA	×0.98		×1.02	V
Dropout voltage *4	V _{IO}	V _{IN} =V _O -0.2V, I _O =250mA		0.3	0.5	V
Line regulation	ΔV ₁	V _{IN} =V _O +1.5~V _O +2.5V, I _O =250mA		10	20	mV
Load regulation	ΔV ₂	I _O =0~250mA		20	120	mV
V _{OUT} temperature coefficient *2	ΔV _{OUT} /ΔT	T _j =-30~+85°C		100		ppm/°C
Ripple rejection *2	RR	f=120Hz V _{RIPPLE} =1V, I _O =250mA	50	64		dB
Output noise voltage *2	V _n	fBW=20~80kHz C _n =470pF		75		μVrms
CONT pin input current	I _{CONT}	V _{CONT} =V _{IN}	10	20	30	μA
CONT pin high threshold level	V _{CONTH}		1.6		V _{IN} +0.3	V
CONT pin low threshold level	V _{CONTL}		-0.3		0.4	V

*2. The parameter is guaranteed by design.

*3. Please refer to another page.

*4. The parameter is not guaranteed in the model less than V_{OUT}=2V.


Electrical Characteristics 2

Output Voltage


Product name	Test condisions	Output voltage		
		Min.	Typ.	Max.
MM1561J	I _O =250mA	1.764	1.8	1.836
MM1561K		1.862	1.9	1.938
MM1562A		1.960	2.0	2.040
MM1562B		2.058	2.1	2.142
MM1562C		2.156	2.2	2.244
MM1562D		2.254	2.3	2.346
MM1562E		2.352	2.4	2.448
MM1562F		2.450	2.5	2.550
MM1562G		2.548	2.6	2.652
MM1562H		2.646	2.7	2.754
MM1562J		2.744	2.8	2.856
MM1562K		2.842	2.9	2.958
MM1563A		2.940	3.0	3.060
MM1563B		3.038	3.1	3.162
MM1563C		3.136	3.2	3.264
MM1563D		3.234	3.3	3.366
MM1563E		3.332	3.4	3.468
MM1563F		3.430	3.5	3.570
MM1563G		3.528	3.6	3.672
MM1563H		3.626	3.7	3.774
MM1563J		3.724	3.8	3.876
MM1563K		3.822	3.9	3.978

Product name	Test condisions	Output voltage		
		Min.	Typ.	Max.
MM1564A	I _O =250mA	3.920	4.0	4.080
MM1564B		4.018	4.1	4.182
MM1564C		4.116	4.2	4.284
MM1564D		4.214	4.3	4.386
MM1564E		4.312	4.4	4.488
MM1564F		4.410	4.5	4.590
MM1564G		4.508	4.6	4.692
MM1564H		4.606	4.7	4.794
MM1564J		4.704	4.8	4.896
MM1564K		4.802	4.9	4.998
MM1565A		4.900	5.0	5.100

Measuring Circuit

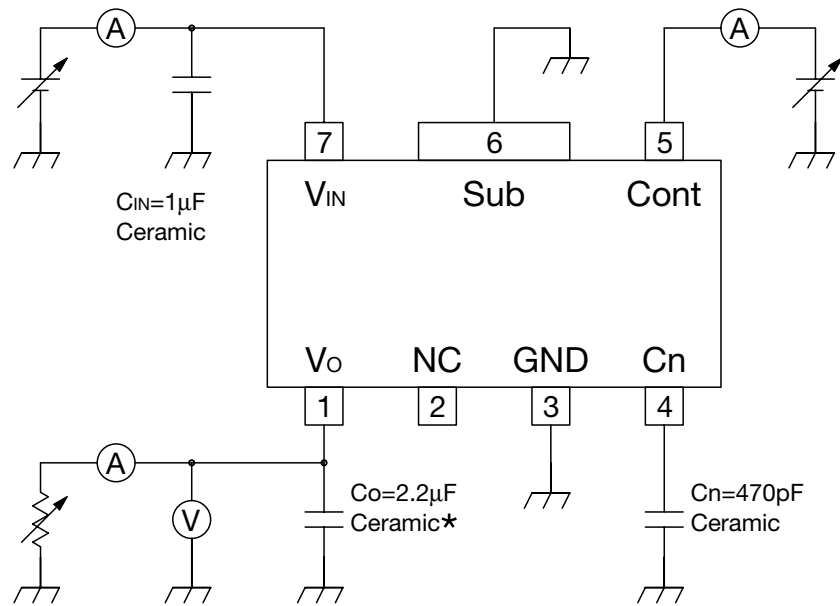

Application Circuit

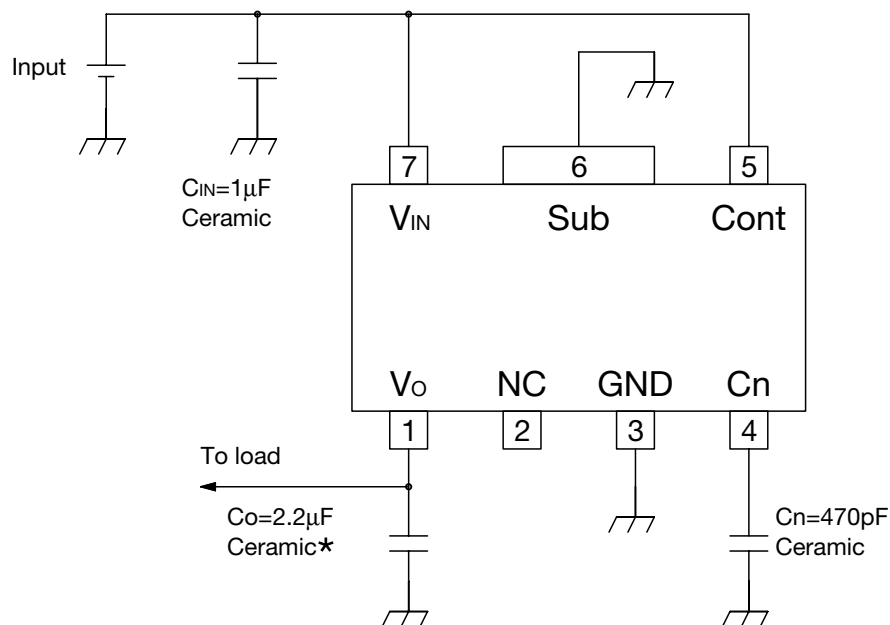


*Temperature Characteristics: B Type

Note


1. The output capacitor is required between output and GND to prevent oscillation.
2. Use a capacitance that is within the ESR characteristics stable range for output capacity.
It is possible to use a ceramic capacitor without ESR resistance for output.
The ceramic capacitor must be used more than 2.2μF and B type temperature characteristics.
3. The wire of Vcc and GND is required to print full ground plane for noise and stability.
4. The input capacitor must be connected a distance of less than 1cm from input pin.
5. The capacitor is connected to Cn must have low leakage current characteristics, because Cn pin is high impedance.
6. The 6pin (heat sink pin) must be connected to GND. This pin can be only connected to GND.
7. In case the output voltage is above the input voltage, the overcurrent flow by internal parasitic diode from output to input. In such application, the external bypass diode must be connected between output and input pin.

Characteristics (3.0V product Except where noted otherwise, $T_a=25^{\circ}\text{C}$, $V_{\text{IN}}=5\text{V}$, $V_{\text{CONT}}=5\text{V}$, $C_{\text{IN}}=1\mu\text{F}$, $C_{\text{O}}=2.2\mu$)


Output-Input Voltage

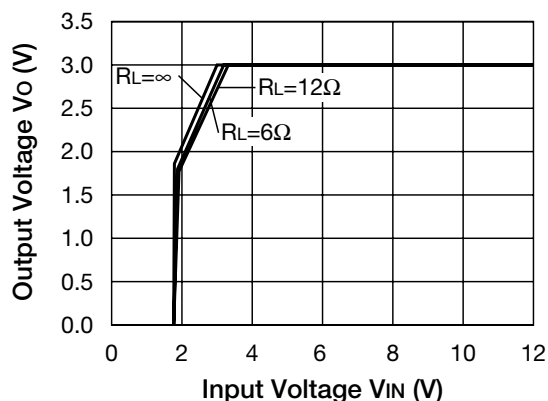


Input Current-Input Voltage

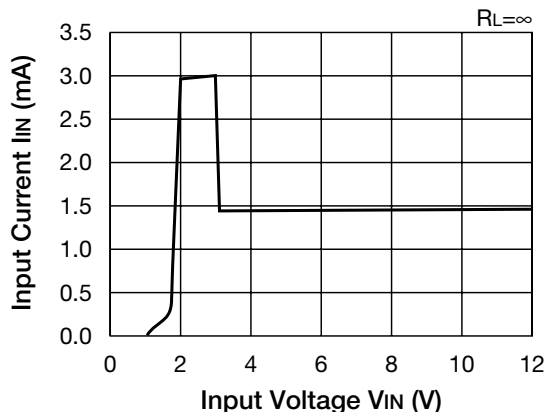


Load Regulation

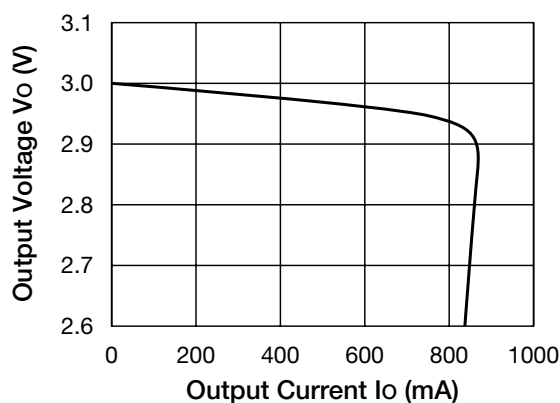


Line Regulation

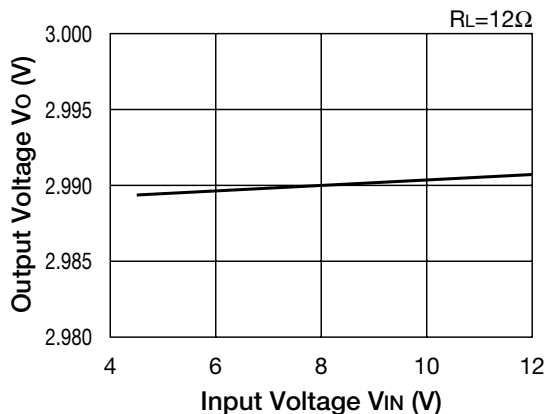


Dropout Voltage-Output Current

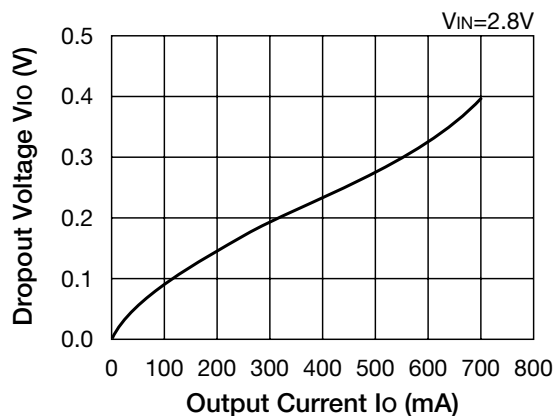


Output Voltage-Junction Temperature

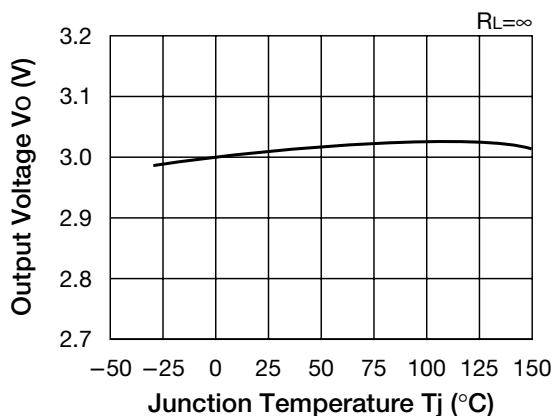


Ripple Rejection

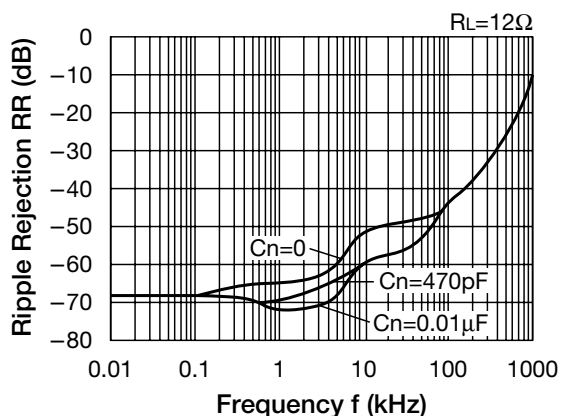


Output Noise

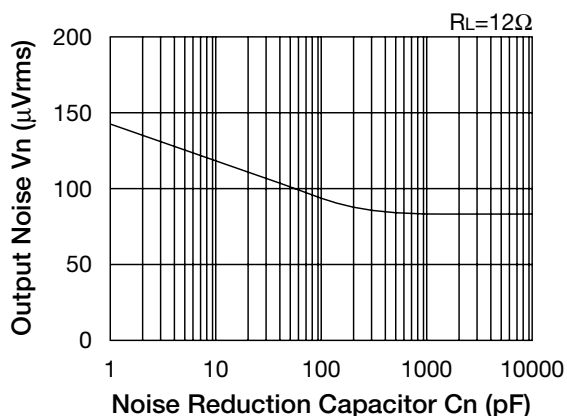


Current Limit Characteristics

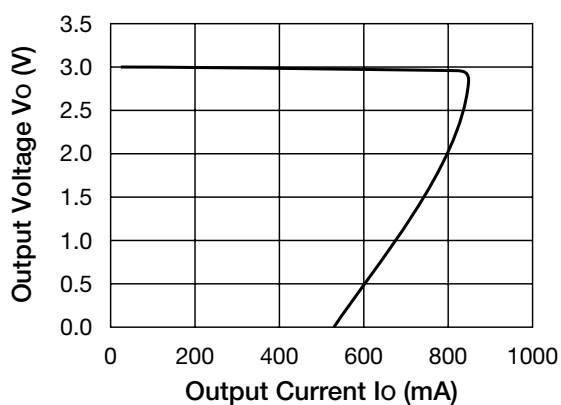


GND Pin Current

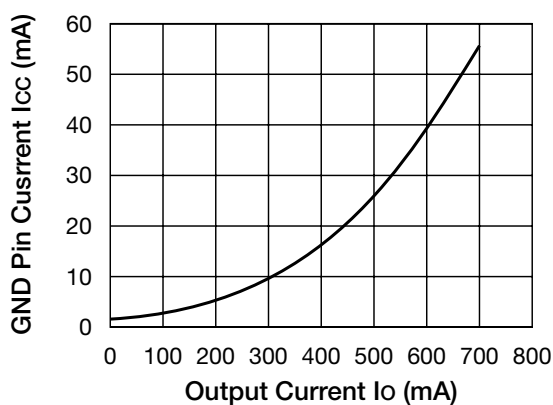

ESR Stability Area

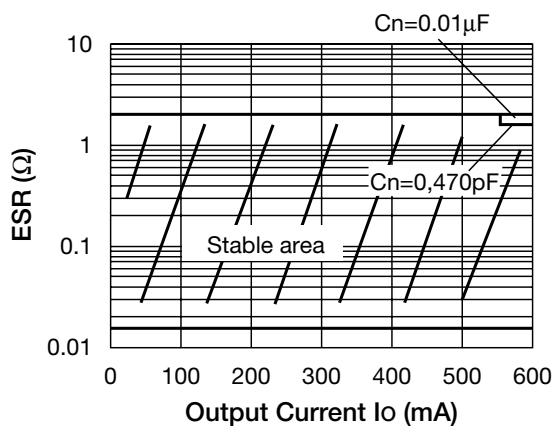


Power Dissipation

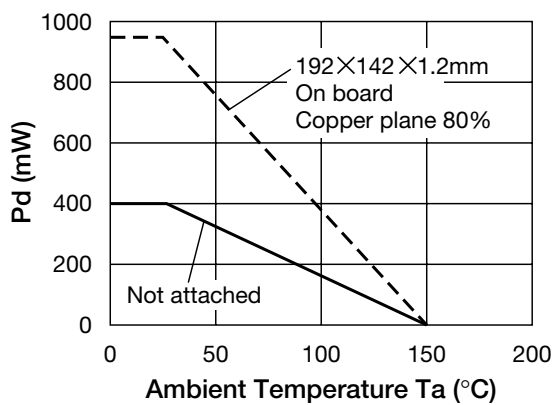


Characteristics
 (1.8V, 3.0V product Except where noted therwise, $T_a=25^{\circ}\text{C}$, $V_{\text{IN}}=5\text{V}$, $V_{\text{CONT}}=5\text{V}$, $C_{\text{IN}}=1\mu\text{F}$, $C_{\text{O}}=2.2\mu$)


Load Regulation

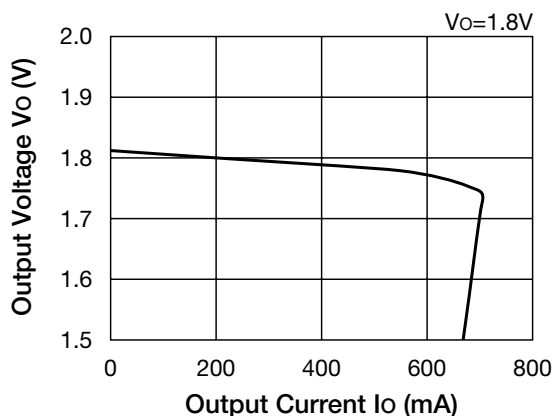


Load Regulation

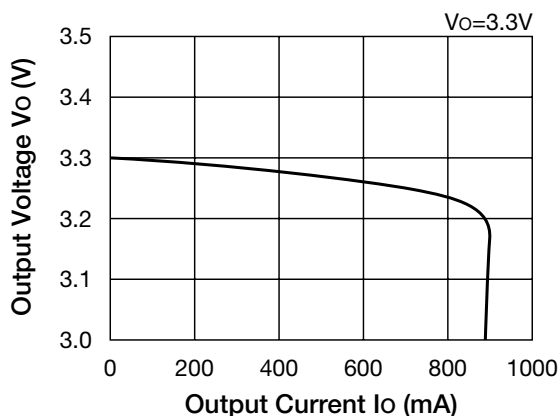


Output Voltage-Junction Temperature

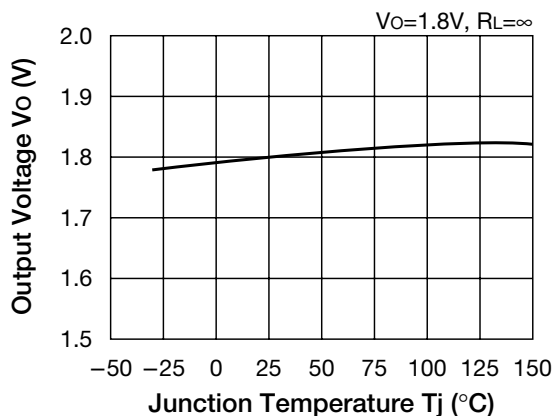


Output Voltage-Junction Temperature

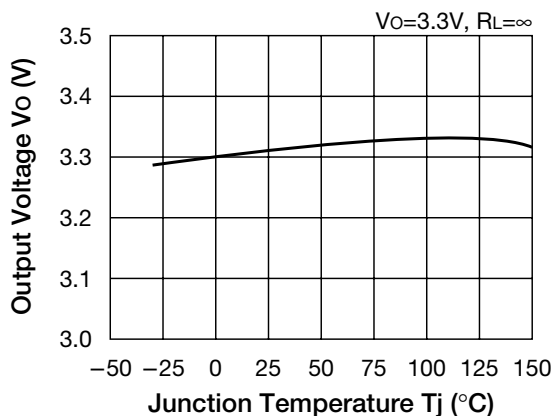

ESR Stability Area

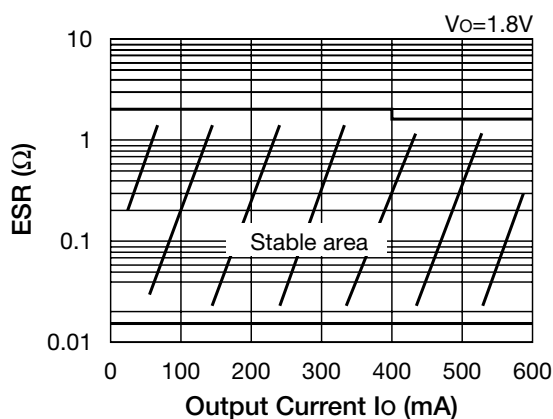


ESR Stability Area

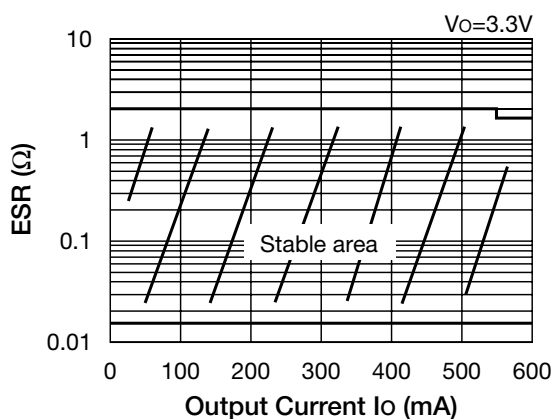


Characteristics (5.0V product Except where noted otherwise, $T_a=25^{\circ}\text{C}$, $V_{\text{IN}}=5\text{V}$, $V_{\text{CONT}}=5\text{V}$, $C_{\text{IN}}=1\mu\text{F}$, $C_{\text{O}}=2.2\mu$)

Load Regulation

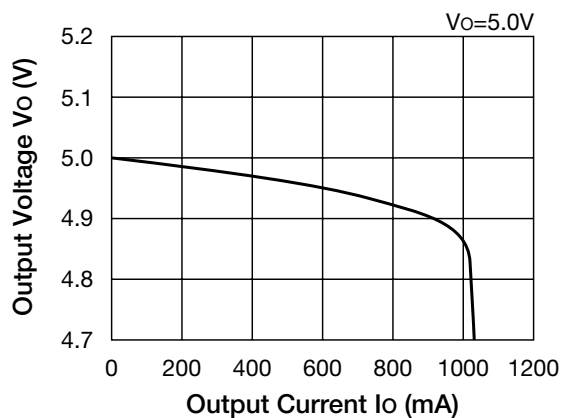

Output Voltage-Junction Temperature

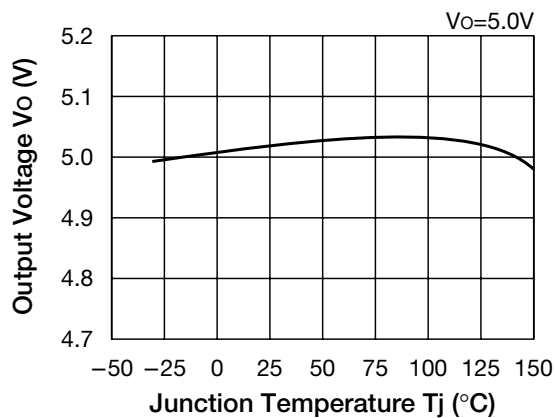

ESR Stability Area

