


LL-34 Hermetically Sealed Glass Zener Voltage Regulators

**REVERSE VOLTAGE – 2.4 to 56 Volts
POWER DISSIPATION – 0.5 Watts**

- FEATURES**
- Zener Voltage Range 2.4 to 56 Volts
 - LL-34 (Mini-MELF) Package
 - Surface Device Type Mounting
 - Hermetically Sealed Glass
 - Compression Bonded Construction
 - All External Surfaces Are Corrosion Resistant And Terminals Are Readily Solderable
 - RoHS Compliant
 - Matte Tin (Sn) Lead Finish
 - Color band Indicates Negative Polarity

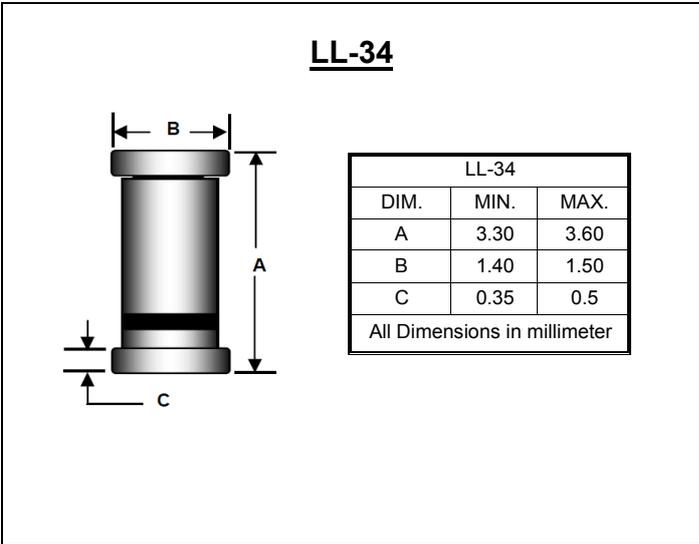

Maximum Ratings & Thermal Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Power Dissipation	P _D	500	mW
Storage Temperature Range	T _{STG}	-65 to +200	°C
Operating Junction Temperature	T _{OPR}	+200	°C


These ratings are limiting values above which the serviceability of the diode may be impaired

Device Marking :

Device P/N	Marking	Pin Diagram	Equivalent Circuit Diagram
LLZ52xxB	N/A		

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Symbol	Parameter
V _Z	Reverse Zener Voltage @ I _{ZT}
I _{ZT}	Reverse Current
Z _{ZT}	Maximum Zener Impedance @ I _{ZT}
I _{ZK}	Reverse Current
Z _{ZK}	Maximum Zener Impedance @ I _{ZK}
I _R	Reverse Leakage Current @ V _R
V _R	Reverse Voltage
I _F	Forward Current
V _F	Forward Voltage @ I _F

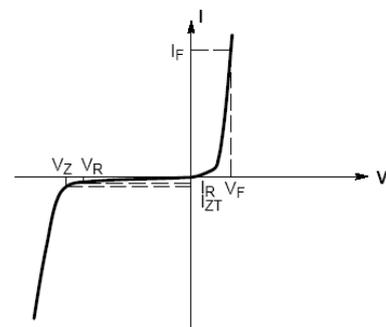

Electrical Characteristics

TA = 25°C unless otherwise noted

Device Type	V _Z @ I _{ZT} (Volts) Nominal	I _{ZT} (mA)	Z _{ZT} @ I _{ZT} (Ω) Max	Z _{ZK} @ I _{ZK} = 0.25mA (Ω) Max	I _R @ V _R (μA) Max	V _R (Volts)
LLZ5221B	2.4	20	30	1200	100	1
LLZ5222B	2.5	20	30	1250	100	1
LLZ5223B	2.7	20	30	1300	75	1
LLZ5224B	2.8	20	30	1400	75	1
LLZ5225B	3	20	29	1600	50	1
LLZ5226B	3.3	20	28	1600	25	1
LLZ5227B	3.6	20	24	1700	15	1
LLZ5228B	3.9	20	23	1900	10	1
LLZ5229B	4.3	20	22	2000	5	1
LLZ5230B	4.7	20	19	1900	5	2
LLZ5231B	5.1	20	17	1600	5	2
LLZ5232B	5.6	20	11	1600	5	3
LLZ5233B	6	20	7	1600	5	3.5
LLZ5234B	6.2	20	7	1000	5	4
LLZ5235B	6.8	20	5	750	3	5
LLZ5236B	7.5	20	6	500	3	6
LLZ5237B	8.2	20	8	500	3	6.5
LLZ5238B	8.7	20	8	600	3	6.5
LLZ5239B	9.1	20	10	600	3	7
LLZ5240B	10	20	17	600	3	8
LLZ5241B	11	20	22	600	2	8.4
LLZ5242B	12	20	30	600	1	9.1
LLZ5243B	13	9.5	13	600	0.5	9.9
LLZ5244B	14	9	15	600	0.1	10
LLZ5245B	15	8.5	16	600	0.1	11
LLZ5246B	16	7.8	17	600	0.1	12
LLZ5247B	17	7.4	19	600	0.1	13
LLZ5248B	18	7	21	600	0.1	14
LLZ5249B	19	6.6	23	600	0.1	14
LLZ5250B	20	6.2	25	600	0.1	15
LLZ5251B	22	5.6	29	600	0.1	17
LLZ5252B	24	5.2	33	600	0.1	18
LLZ5253B	25	5	35	600	0.1	19
LLZ5254B	27	4.6	41	600	0.1	21
LLZ5255B	28	4.5	44	600	0.1	21
LLZ5256B	30	4.2	49	600	0.1	23
LLZ5257B	33	3.8	58	700	0.1	25
LLZ5258B	36	3.4	70	700	0.1	27
LLZ5259B	39	3.2	80	800	0.1	30
LLZ5260B	43	3	93	900	0.1	33
LLZ5261B	47	2.7	105	1000	0.1	36
LLZ5262B	51	2.5	125	1100	0.1	39
LLZ5263B	56	2.2	150	1300	0.1	43

V_F Forward Voltage = 1.1 V Maximum @ I_F = 200 mA for all types

Notes:

1. The type numbers listed have zener voltage as shown and have a standard tolerance on the nominal zener voltage of ±5% in Blue marking.
2. For detailed information on price, availability and delivery of nominal zener voltages between the voltages shown and tighter voltage tolerances, contact your nearest Liteon Semiconductor Corp. representative.
3. The zener impedance is derived from the 60-cycle ac voltage, which results when an ac current having an rms value equal to 10% of the dc zener current (I_{ZT} or I_{ZK}) is superimposed to I_{ZT} or I_{ZK}.

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.